


PROBLEM SUMMARY

Sample Rating Trend




VISCOSITY

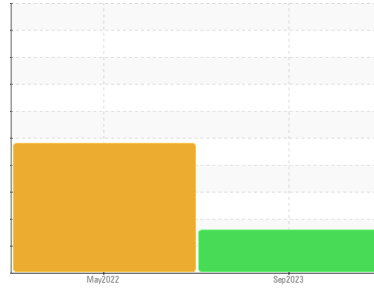


Machine Id
KAESER SK 20 7789838 (S/N 1575)
Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 40°C

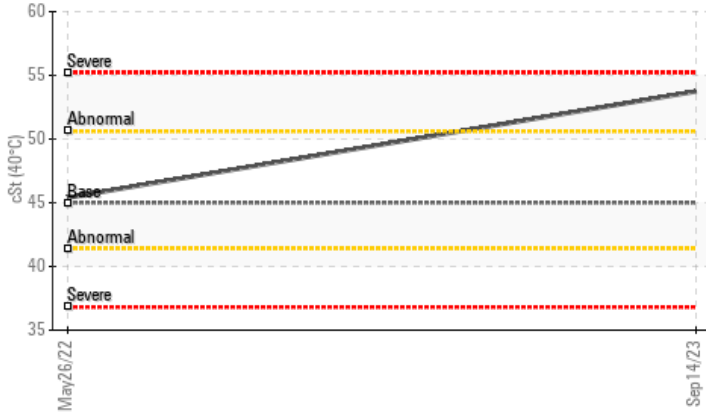

▲ Particle Trend

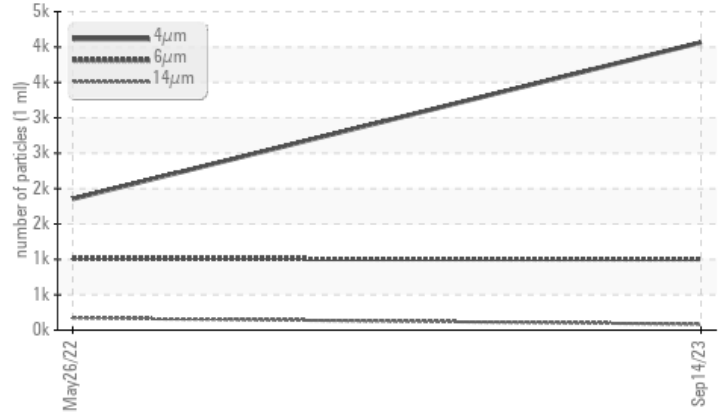

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM	Value	ABNORMAL	ABNORMAL	---
Particles >14µm	ASTM D7647	>80	▲ 84	▲ 172	---
Particles >21µm	ASTM D7647	>20	▲ 25	▲ 58	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 19/17/14	▲ 18/17/15	---
Visc @ 40°C	cSt ASTM D445	45	▲ 53.74	45.4	---

Customer Id: HOMBRI
Sample No.: KCPA001056
Lab Number: 05960669
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

26 May 2022 Diag: Doug Bogart

WATER



Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition. All component wear rates are normal. There is a high amount of particulates present in the oil. Free water present. There is a light concentration of water present in the oil. The AN level is acceptable for this fluid.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

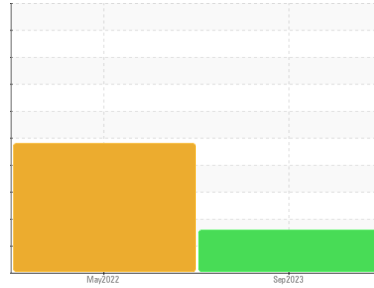

VISCOSITY



Machine Id
KAESER SK 20 7789838 (S/N 1575)

Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			KCPA001056	KCP49540	---
Sample Date	Client Info			14 Sep 2023	26 May 2022	---
Machine Age	hrs	Client Info		6556	3770	---
Oil Age	hrs	Client Info		0	3770	---
Oil Changed	Client Info			N/A	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	8	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m	>3	0	0	---
Titanium	ppm	ASTM D5185m	>3	0	0	---
Silver	ppm	ASTM D5185m	>2	0	<1	---
Aluminum	ppm	ASTM D5185m	>10	0	<1	---
Lead	ppm	ASTM D5185m	>10	0	<1	---
Copper	ppm	ASTM D5185m	>50	26	4	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	<1	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	---
Barium	ppm	ASTM D5185m	90	0	52	---
Molybdenum	ppm	ASTM D5185m	0	<1	0	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	100	8	57	---
Calcium	ppm	ASTM D5185m	0	<1	<1	---
Phosphorus	ppm	ASTM D5185m	0	5	16	---
Zinc	ppm	ASTM D5185m	0	0	9	---
Sulfur	ppm	ASTM D5185m	23500	20843	17403	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	---
Sodium	ppm	ASTM D5185m		4	2	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water	%	ASTM D6304	>0.05	0.006	▲ 0.283	---
ppm Water	ppm	ASTM D6304	>500	67.8	▲ 2830	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		4065	1853	---
Particles >6µm		ASTM D7647	>1300	1004	1009	---
Particles >14µm		ASTM D7647	>80	▲ 84	▲ 172	---
Particles >21µm		ASTM D7647	>20	▲ 25	▲ 58	---
Particles >38µm		ASTM D7647	>4	2	▲ 9	---
Particles >71µm		ASTM D7647	>3	1	1	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ 19/17/14	▲ 18/17/15	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.35	0.57	---


OIL ANALYSIS REPORT

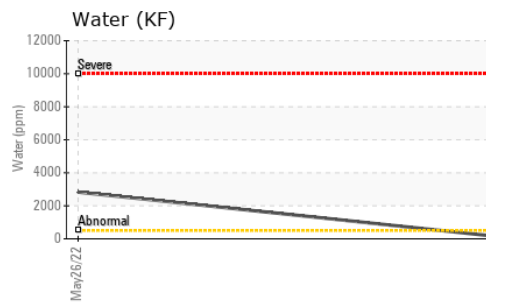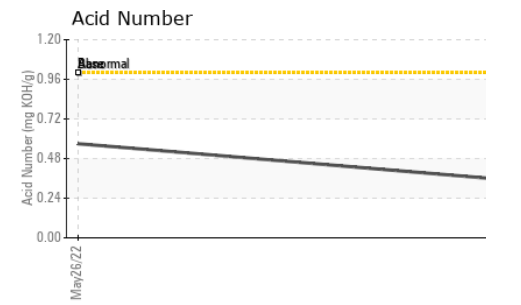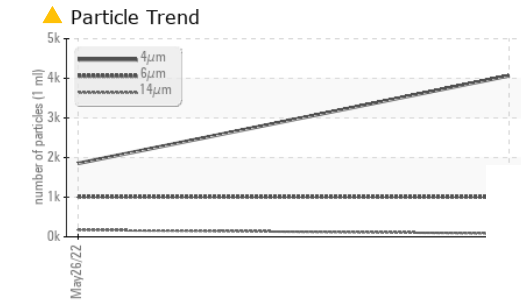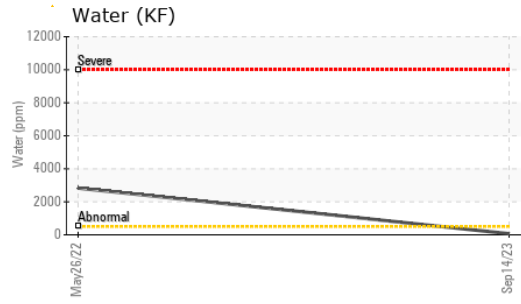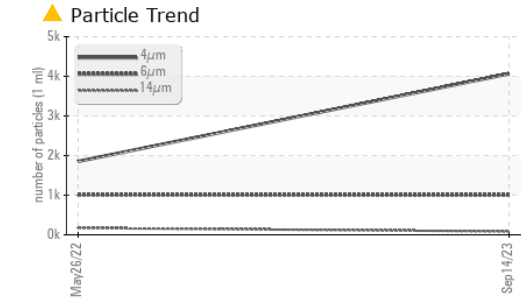





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	0.2%
Free Water	scalar	*Visual		NEG	▲ 1.0

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	▲ 53.74	45.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

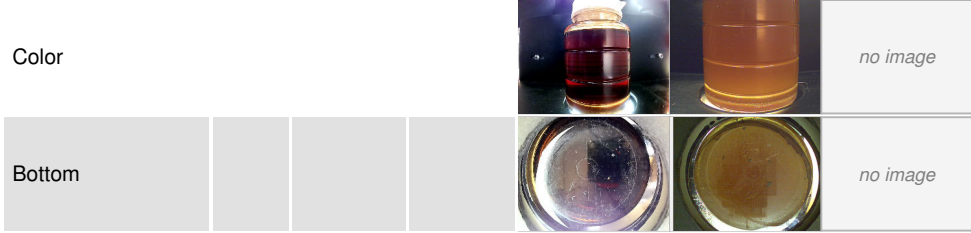

GRAPHS

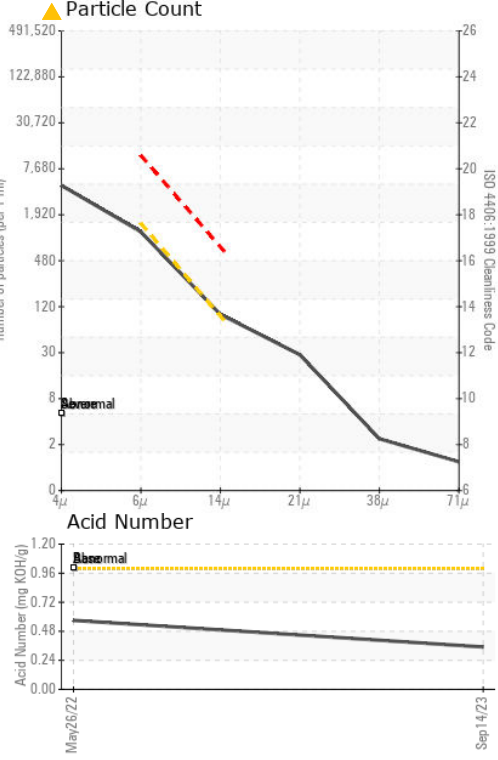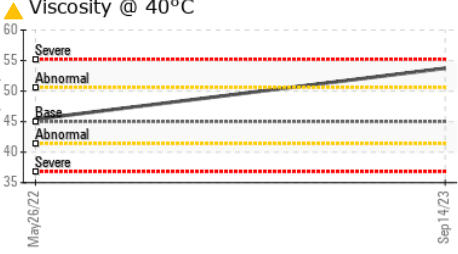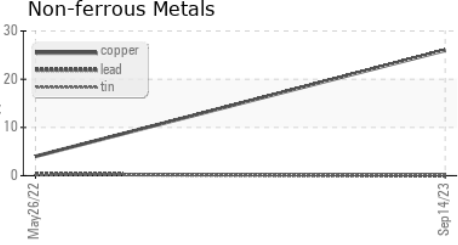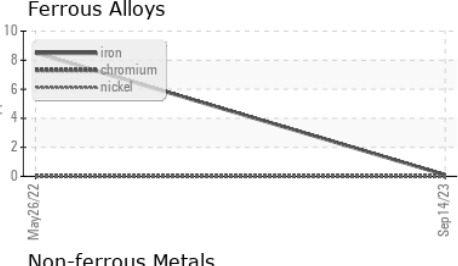

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA001056 **Received** : 25 Sep 2023
Lab Number : 05960669 **Diagnosed** : 29 Sep 2023
Unique Number : 10661882 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PrtCount)

HOME FOOD SERVICE
 2092 FARRAGUT AVE
 BRISTOL, PA
 US 19007
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: