

# **OIL ANALYSIS REPORT**

# Sample Rating Trend



## Machine Id 7622848 (S/N 1178) Component

**Compressor** 

KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Aug202	1 Apr2022	Feb2023 Au	g2023	
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA003549	KCP55800	KCP45064
Sample Date		Client Info		26 Aug 2023	03 Feb 2023	30 Apr 2022
Machine Age	hrs	Client Info		23011	18126	11423
Oil Age	hrs	Client Info		0	6703	6314
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	ATTENTION	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	1	3	3
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		1	<1	<1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Antimony	ppm	ASTM D5185m	210			
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium		ASTM D5185m		0	0	0
	ppm					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	34	20	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	100	88	71	63
Calcium	ppm	ASTM D5185m	0	2	<1	0
Phosphorus	ppm	ASTM D5185m	0	5	0	0
Zinc	ppm	ASTM D5185m	0	0	11	2
Sulfur	ppm	ASTM D5185m	23500	23773	22015	18611
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	1
Sodium	ppm	ASTM D5185m		19	19	6
Potassium	ppm	ASTM D5185m	>20	3	2	3
Water	%	ASTM D6304	>0.05	0.029	0.033	0.020
ppm Water	ppm	ASTM D6304	>500	296.0	334.1	209.2
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		2390	2275	2258
Particles >6µm		ASTM D7647	>1300	622	971	866
Particles >14µm		ASTM D7647	>80	46	<b>1</b> 56	<b>1</b> 58
Particles >21µm		ASTM D7647	>20	15	<u> </u>	<b>A</b> 32
Particles >38µm		ASTM D7647	>4	0	2	2
Particles >71μm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	18/16/13	▲ 18/17/14	▲ 18/17/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.42	0.34	0.41
:48:21) Rev: 1	mgnonng		Contact/Location: Service Manager - PUBCON			

Report Id: PURCON [WUSCAR] 05960685 (Generated: 09/27/2023 15:48:21) Rev: 1

Contact/Location: Service Manager - PURCON



800 Water (ppm)

600

400

12  $\widehat{E}^{10}$ 

of particles (1)

100

600 Water 400

200

5

particles (1 ml)

8k

61 \*


4)

2


n

Δ har 2

# **OIL ANALYSIS REPORT**

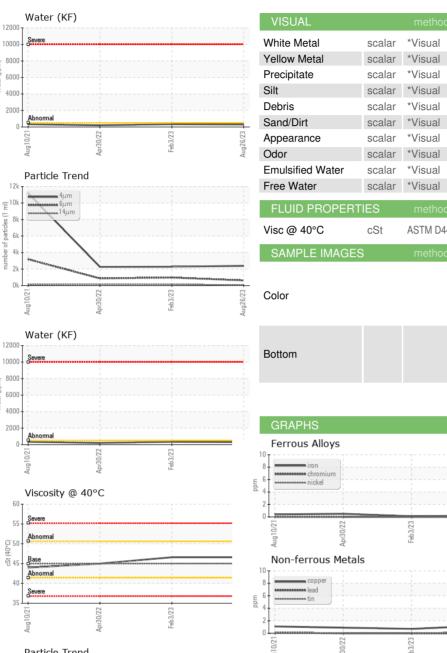



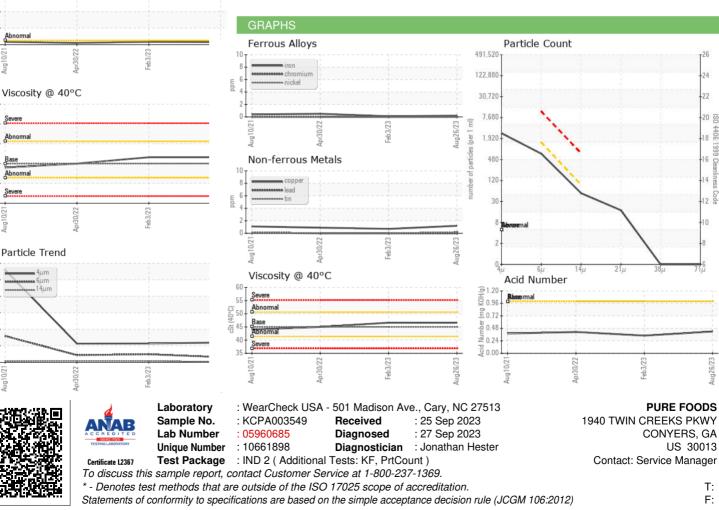

Contact/Location: Service Manager - PURCON