


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
CATERPILLAR 730 6080 (S/N TFF00703)
Component
Center Differential
Fluid
TULCO LUBSOIL TO-4 50 (12 GAL)

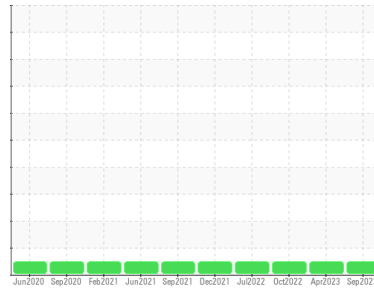

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO10002721	TO10002147	TO10001491
Sample Date	Client Info			21 Sep 2023	05 Apr 2023	05 Oct 2022
Machine Age	hrs	Client Info		9710	9213	8703
Oil Age	hrs	Client Info		2044	1549	1039
Oil Changed	Client Info			Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		48	58	42
Iron	ppm	ASTM D5185m	>500	62	53	43
Chromium	ppm	ASTM D5185m	>3	<1	<1	<1
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>2	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	7	3	5
Lead	ppm	ASTM D5185m	>13	0	0	0
Copper	ppm	ASTM D5185m	>103	12	9	5
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		2	0	2
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		15	14	15
Calcium	ppm	ASTM D5185m		4162	3881	4377
Phosphorus	ppm	ASTM D5185m		832	786	791
Zinc	ppm	ASTM D5185m		1023	976	1010
Sulfur	ppm	ASTM D5185m		4784	4803	5376

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>100	26	20	20
Sodium	ppm	ASTM D5185m		2	3	3
Potassium	ppm	ASTM D5185m	>20	2	1	2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.13	1.05	0.88

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG









OIL ANALYSIS REPORT

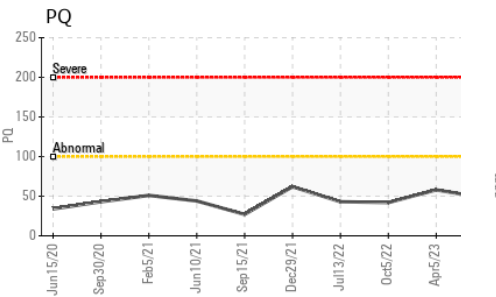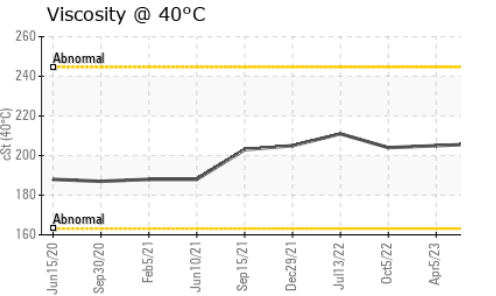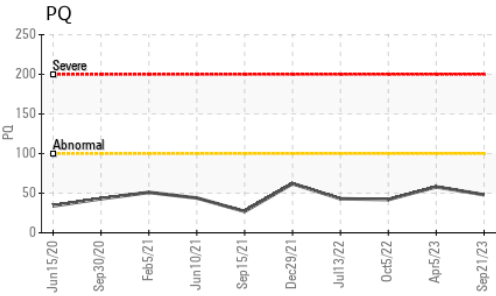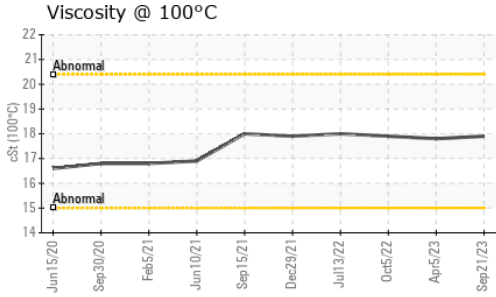

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		206	205	204
Visc @ 100°C	cSt	ASTM D445		17.9	17.8	17.9
Viscosity Index (VI)	Scale	ASTM D2270		94	94	95

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

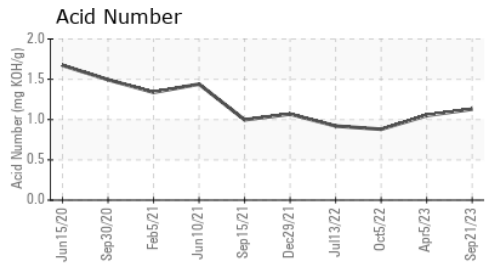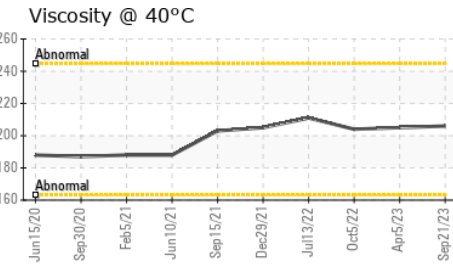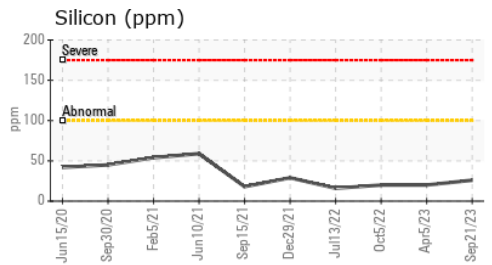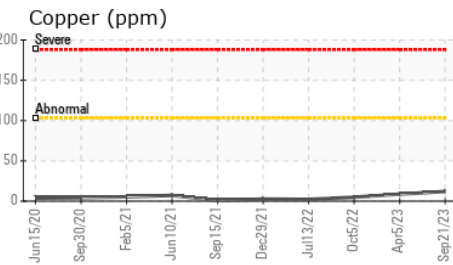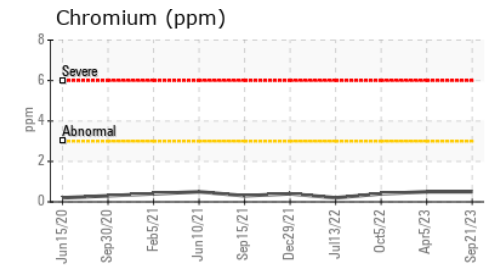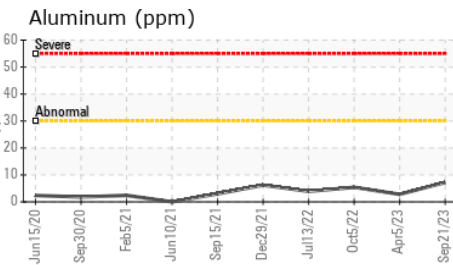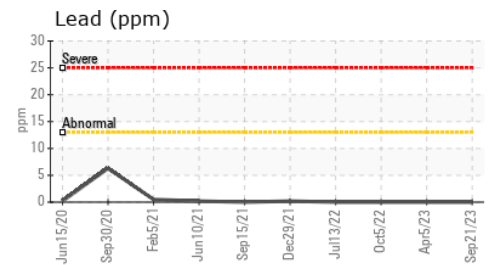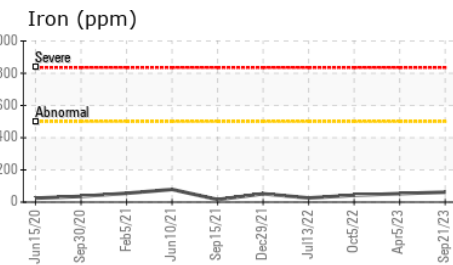

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10002721 **Received** : 25 Sep 2023
Lab Number : 05960731 **Diagnosed** : 27 Sep 2023
Unique Number : 10661944 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137

Contact: MIKE SNYDER
 msnyder@anchorstoneco.com

T: (417)850-9635

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: