




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

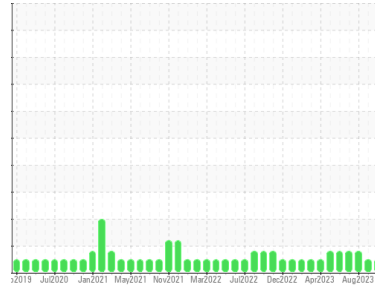

Area  
**Nashville**  
 Machine Id  
**[Nashville] Oil - Port Main Engine**  
 Component  
**Port Main Engine**  
 Fluid  
**MOBIL 15W40 (150 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Dparnell oil and filters has not been changed 700 hrs on both )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0769330</b>	WC0769196	WC0769193
Sample Date	Client Info			<b>05 Sep 2023</b>	07 Aug 2023	07 Aug 2023
Machine Age	hrs	Client Info		<b>55820</b>	55297	55124
Oil Age	hrs	Client Info		<b>700</b>	173	4644
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	<b>4</b>	3	14
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>1</b>	3	4
Lead	ppm	ASTM D5185m	>18	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>80	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>14	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>66</b>	73	51
Barium	ppm	ASTM D5185m		<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>37</b>	40	47
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>849</b>	882	957
Calcium	ppm	ASTM D5185m		<b>1548</b>	1568	1847
Phosphorus	ppm	ASTM D5185m		<b>987</b>	1004	1089
Zinc	ppm	ASTM D5185m		<b>1173</b>	1232	1416
Sulfur	ppm	ASTM D5185m		<b>3318</b>	3675	3876



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>3</b>	3	3
Sodium	ppm	ASTM D5185m	>118	<b>&lt;1</b>	5	5
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	4	5

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>1.2</b>	0.6	▲ 2.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.1</b>	6.0	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.6</b>	19.8	25.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.9</b>	15.0	18.2
Base Number (BN)	mg KOH/g	ASTM D2896		<b>11.29</b>	11.81	11.81







# OIL ANALYSIS REPORT

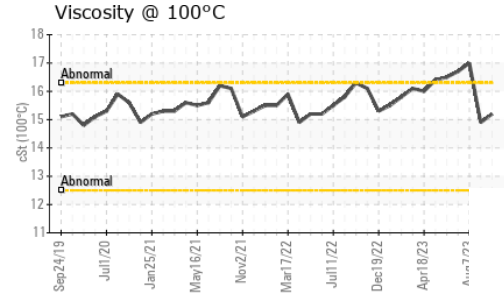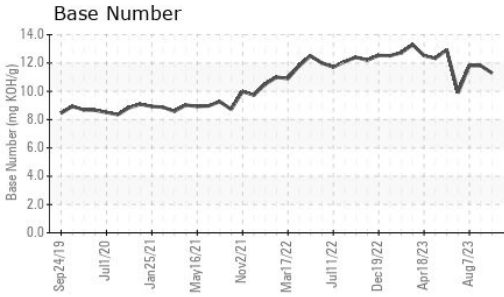

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>15.2</b>	14.9	17.0

## GRAPHS

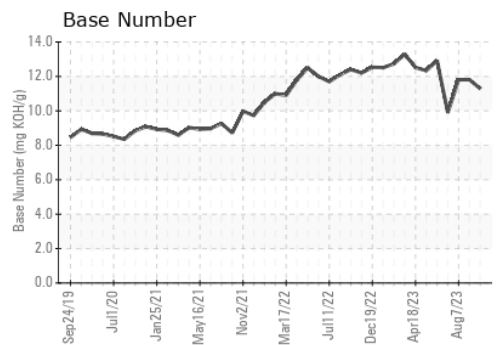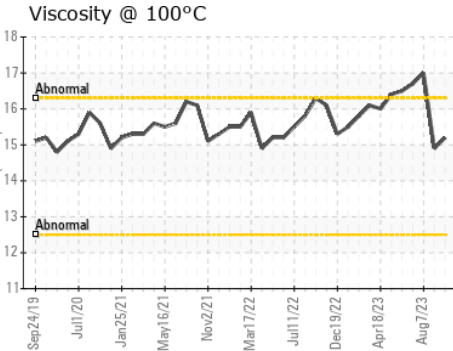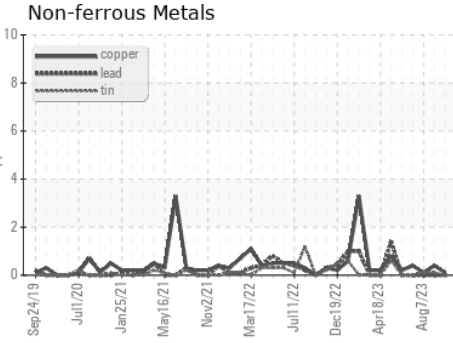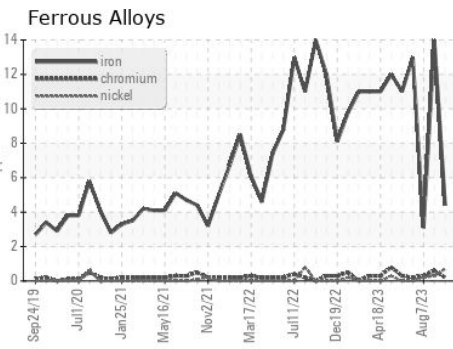

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0769330 **Received** : 25 Sep 2023  
**Lab Number** : **05960781** **Diagnosed** : 27 Sep 2023  
**Unique Number** : 10661994 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**MARATHON PETROLEUM CO.**  
 101 12TH ST  
 CATLETTSBURG, KY  
 US 41169  
 Contact: CORY GUMBERT  
 cagumbert@marathonpetroleum.com  
 T: (606)585-3950  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)