

# **PROBLEM SUMMARY**

Sample Rating Trend

DIRT


090-0004 - BATCH FEEDER BELT Component

Gearbox

GEAR OIL ISO 220 (--- GAL)



### **COMPONENT CONDITION SUMMARY**

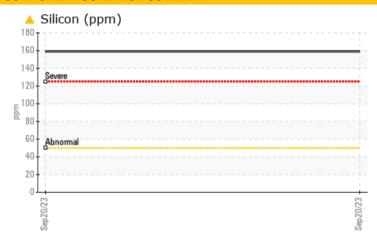

### RECOMMENDATION

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status				ABNORMAL					
Silicon	ppm	ASTM D5185m	>50	<b>159</b>					

**Customer Id: AECCHATN** Sample No.: WC0815091 Lab Number: 05960844 Test Package: CONST To manage this report scan the QR code To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

## RECOMMENDED ACTIONS

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**

Sample Rating Trend

DIRT

Machine Id

# 090-0004 - BATCH FEEDER BELT

Component

Gearbox

GEAR OIL ISO 220 (--- GAL)

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.


### **Fluid Condition**

The condition of the oil is acceptable for the time in service.

				1			
				Sep 2023			
SAMPLE INFORM	IATION	method	limit/base	current	hi	story1	history2
	IATION		IIIIIIIIIIIII			Story	
Sample Number		Client Info		WC0815091			
Sample Date	laa	Client Info		20 Sep 2023			
Machine Age	hrs	Client Info		0			
Oil Age Oil Changed	hrs	Client Info		Changed			
Sample Status		Ciletit IIIIO		ABNORMAL			
· ·				-			
WEAR METALS		method	limit/base	current	hi	story1	history2
Iron	ppm	ASTM D5185m	>200	49			
Chromium	ppm	ASTM D5185m	>10	<1			
Nickel	ppm	ASTM D5185m	>10	1			
Titanium	ppm	ASTM D5185m		<1			
Silver	ppm	ASTM D5185m		0			
Aluminum	ppm	ASTM D5185m	>25	<1			
Lead	ppm	ASTM D5185m	>50	0			
Copper	ppm	ASTM D5185m	>200	<1			
Tin	ppm	ASTM D5185m	>10	0			
Vanadium	ppm	ASTM D5185m		0			
Cadmium	ppm	ASTM D5185m		0			
ADDITIVES		method	limit/base	current	hi	story1	history2
Boron	ppm	ASTM D5185m	50	94			
Barium	ppm	ASTM D5185m	15	3			
Molybdenum	ppm	ASTM D5185m	15	373			
Manganese	ppm	ASTM D5185m		<1			
Magnesium	ppm	ASTM D5185m	50	2			
Calcium	ppm	ASTM D5185m	50	97			
Phosphorus	ppm	ASTM D5185m	350	1050			
Zinc	ppm	ASTM D5185m	100	59			
Sulfur	ppm	ASTM D5185m	12500	23605			
CONTAMINANTS		method	limit/base	current	hi	story1	history2
Silicon	ppm	ASTM D5185m	>50	<b>159</b>			
Sodium	ppm	ASTM D5185m		0			
Potassium	ppm	ASTM D5185m	>20	2			
VISUAL		method	limit/base	current	hi	story1	history2
White Metal	scalar	*Visual	NONE	NONE			
Yellow Metal	scalar	*Visual	NONE	NONE			
Precipitate	scalar	*Visual	NONE	NONE			
Silt	scalar	*Visual	NONE	NONE			
Debris	scalar	*Visual	NONE	NONE			
Sand/Dirt	scalar	*Visual	NONE	NONE			
Appearance	scalar	*Visual	NORML	NORML			
Odor	scalar	*Visual	NORML	NORML			
Emulsified Water	scalar	*Visual	>0.2	NEG			
Free Water	scalar	*Visual		NEG			
FLUID PROPERT	IES	method	limit/base	current	hi	story1	history2



## **OIL ANALYSIS REPORT**

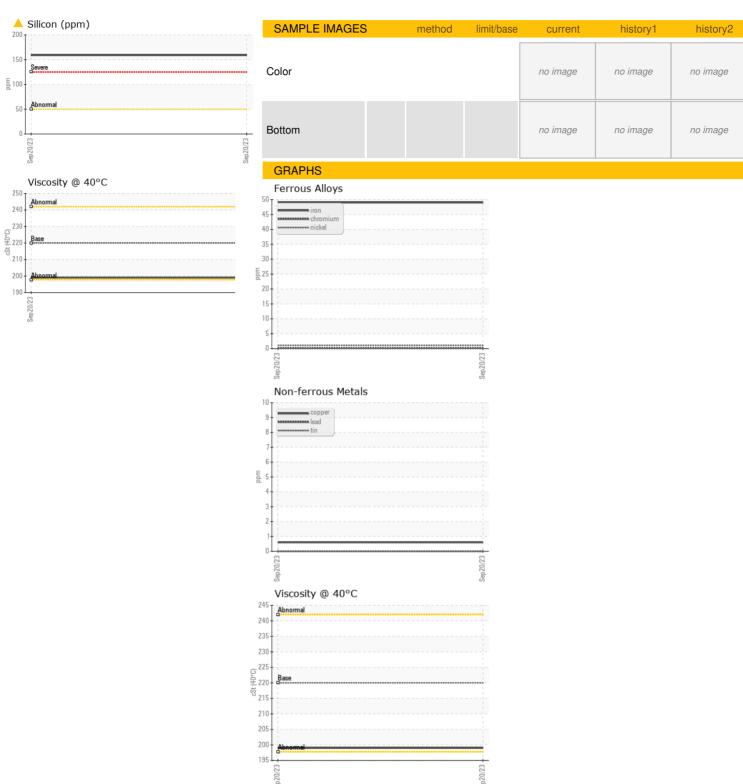





Laboratory Sample No. Lab Number Unique Number : 10662057

: WC0815091 : 05960844 Test Package : CONST

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 25 Sep 2023 Diagnosed : 27 Sep 2023 Diagnostician : Jonathan Hester

SHIMMICK CONSTRUCTION 5535 TRAILHEAD DRIVE CHATTANOOGA, TN US 37415

Contact: DANIEL LISELLA daniel.lisella@shimmick.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: