




# OIL ANALYSIS REPORT

Sample Rating Trend

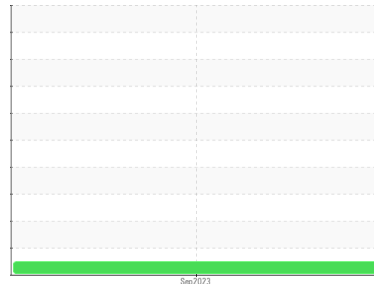

**NORMAL**



Machine Id  
**KIOTI CK4010 YR70-00325**

Component  
**Diesel Engine**

Fluid  
**NOT GIVEN (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KT0000737</b>	---	---
Sample Date	Client Info			<b>20 Sep 2023</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>7</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Lead	ppm	ASTM D5185m	>40	<b>13</b>	---	---
Copper	ppm	ASTM D5185m	>330	<b>30</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>20</b>	---	---
Barium	ppm	ASTM D5185m		<b>6</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>54</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>898</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1162</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1063</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1262</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>4024</b>	---	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>13</b>	---	---
Sodium	ppm	ASTM D5185m		<b>4</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Fuel	%	ASTM D3524	>5	<b>1.6</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.0</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>14.3</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>10.3</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.5</b>	---	---







# OIL ANALYSIS REPORT

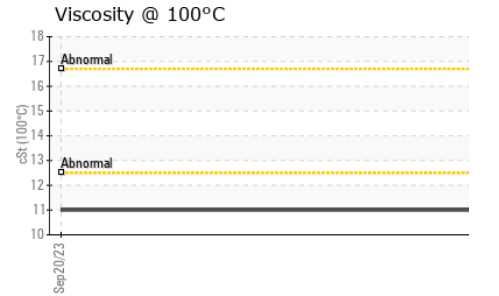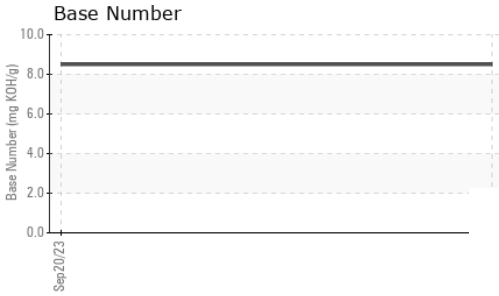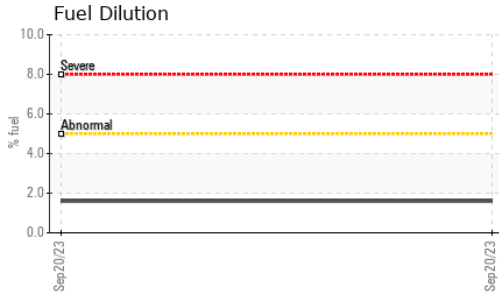

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.0	---	---

### GRAPHS

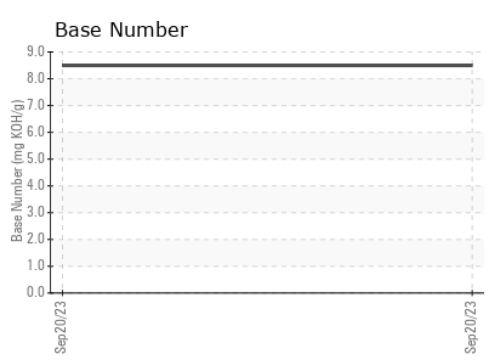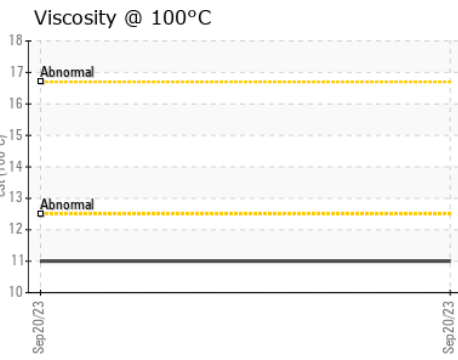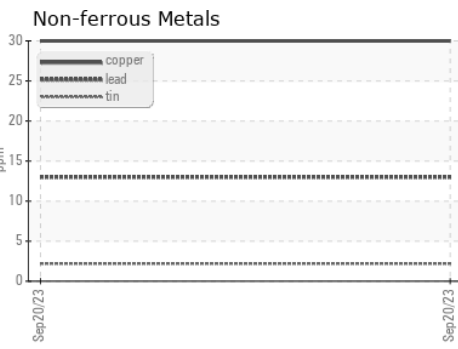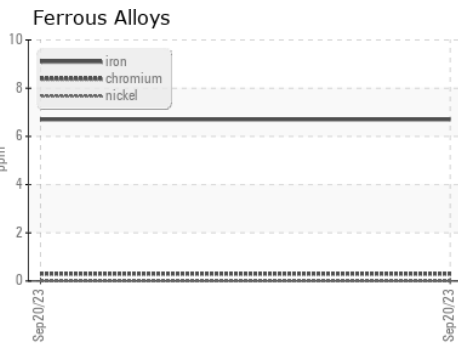

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KT0000737 **Received** : 26 Sep 2023  
**Lab Number** : 05961097 **Diagnosed** : 27 Sep 2023  
**Unique Number** : 10662310 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: FuelDilution, PercentFuel, TBN )

**MASON TRACTOR CO**  
 1050 APPALACHIAN HWY  
 BLUE RIDGE, GA  
 US 30513  
 Contact: CELESTE JONES  
 celestejones@masontractorco.com  
 T: (706)632-3777  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)