




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

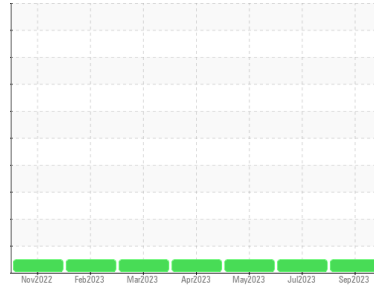

Area  
**NIAGARA WATER BRIGHAM CITY UT**  
 Machine Id  
**H3 HYPET**  
 Component  
**Hydraulic System**  
 Fluid  
**NOT GIVEN (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PTK0004336</b>	PTK0004342	PTK0004340
Sample Date	Client Info	<b>19 Sep 2023</b>	27 Jul 2023	24 May 2023
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	<b>18</b>	10	5
Chromium ppm ASTM D5185m	>10	<b>0</b>	0	0
Nickel ppm ASTM D5185m	>10	<b>0</b>	0	0
Titanium ppm ASTM D5185m		<b>0</b>	0	0
Silver ppm ASTM D5185m		<b>0</b>	0	0
Aluminum ppm ASTM D5185m	>10	<b>0</b>	<1	<1
Lead ppm ASTM D5185m	>10	<b>0</b>	0	0
Copper ppm ASTM D5185m	>75	<b>&lt;1</b>	0	0
Tin ppm ASTM D5185m	>10	<b>0</b>	0	0
Vanadium ppm ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium ppm ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>0</b>	0	0
Barium ppm ASTM D5185m		<b>0</b>	0	0
Molybdenum ppm ASTM D5185m		<b>0</b>	0	<1
Manganese ppm ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium ppm ASTM D5185m		<b>0</b>	0	0
Calcium ppm ASTM D5185m		<b>112</b>	113	115
Phosphorus ppm ASTM D5185m		<b>98</b>	100	106
Zinc ppm ASTM D5185m		<b>17</b>	17	6
Sulfur ppm ASTM D5185m		<b>640</b>	687	728

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>20	<b>2</b>	2	1
Sodium ppm ASTM D5185m		<b>&lt;1</b>	<1	1
Potassium ppm ASTM D5185m	>20	<b>0</b>	0	0





## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	<b>117</b>	1283	525
Particles >6µm ASTM D7647	>1300	<b>43</b>	369	139
Particles >14µm ASTM D7647	>160	<b>6</b>	23	11
Particles >21µm ASTM D7647	>40	<b>1</b>	5	4
Particles >38µm ASTM D7647	>10	<b>0</b>	0	0
Particles >71µm ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness ISO 4406 (c)	>19/17/14	<b>14/13/10</b>	17/16/12	16/14/11

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		<b>0.21</b>	0.22	0.19


# OIL ANALYSIS REPORT

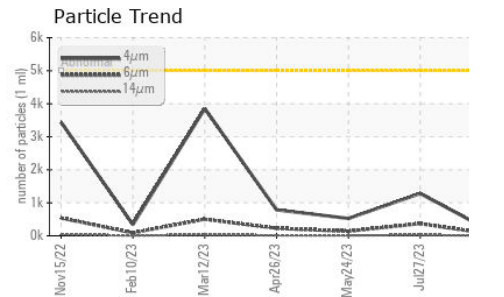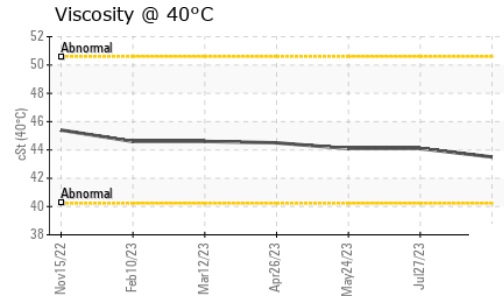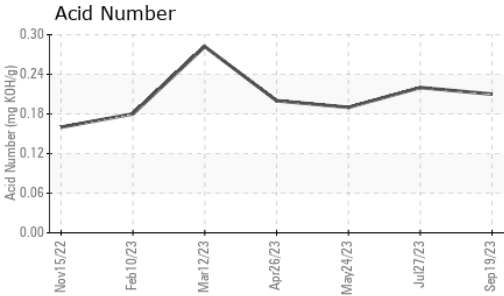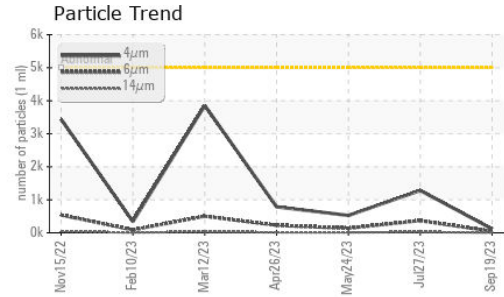






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	43.5	44.1	44.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

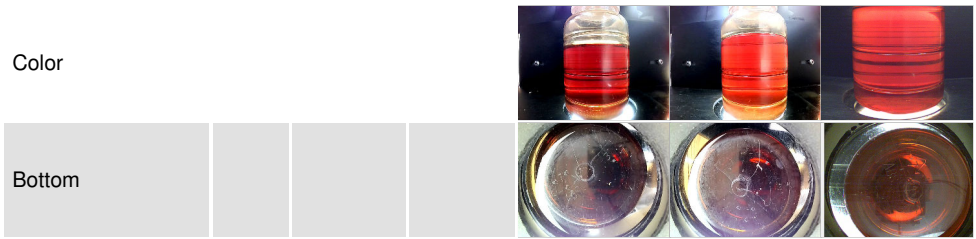

## GRAPHS

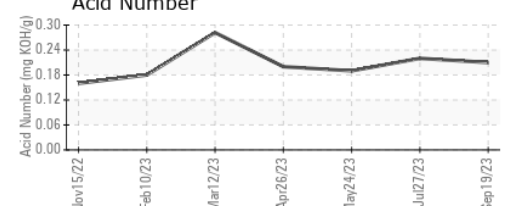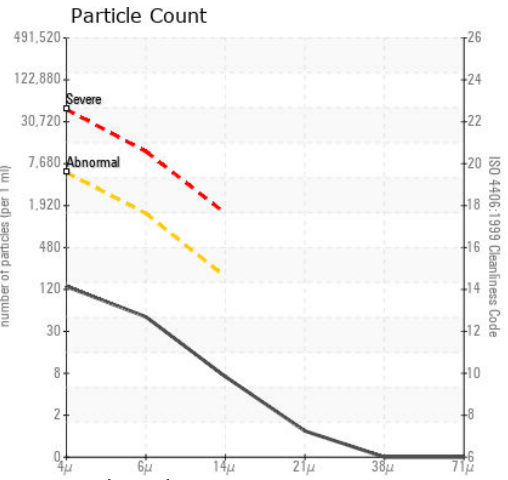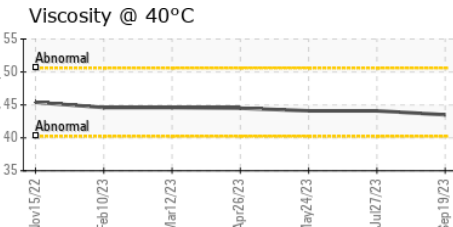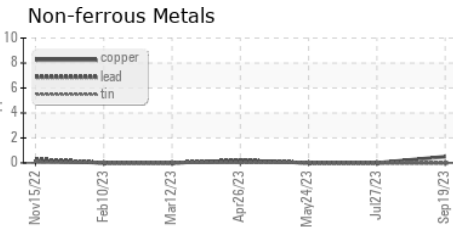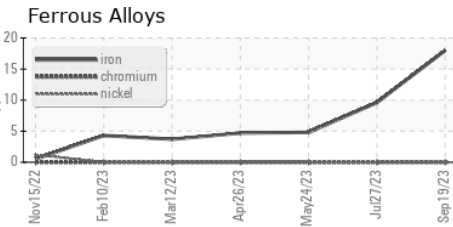

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PTK0004336 **Received** : 26 Sep 2023  
**Lab Number** : 05961215 **Diagnosed** : 27 Sep 2023  
**Unique Number** : 10662428 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2

**NIAGARA BOTTLING - BRIGHAM CITY**  
 77 N INDUSTRIAL WAY  
 BRIGHAM CITY, UT  
 US 84302  
 Contact: REX COLLEDGE  
 rcolledge@niagarawater.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)