

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

IRON STAR [200006142] 09WEA88298

Component Wind Turbine Gearbox Elui GEAR OIL (PAO) ISO 320 (--- LTR)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


			Feb2022	Sep2023			
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		NX05961227	NX05491187		
Sample Date		Client Info		25 Sep 2023	18 Feb 2022		
Machine Age	hrs	Client Info		0	0		
Oil Age	hrs	Client Info		0	0		
Oil Changed		Client Info		N/A	N/A		
Sample Status				NORMAL	NORMAL		
WEAR METALS		method	limit/base	current	history1	history2	
PQ		ASTM D8184	>50	14	20		
Iron	ppm	ASTM D5185m	>30	26	15		
Chromium	ppm	ASTM D5185m	>3	0	0		
Nickel	ppm	ASTM D5185m	>3	0	0		
Titanium	ppm	ASTM D5185m	>10	0	0		
Silver	ppm	ASTM D5185m		0	0		
Aluminum	ppm	ASTM D5185m	>30	0	<1		
Lead	ppm	ASTM D5185m	>15	0	<1		
Copper	ppm	ASTM D5185m	>10	۰ <1	<1		
Tin	ppm	ASTM D5185m		<1	<1		
Vanadium	ppm	ASTM D5185m	210	<1	0		
Cadmium		ASTM D5185m		0	0		
	ppm						
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	25	4	10		
Barium	ppm	ASTM D5185m	12	0	0		
Molybdenum	ppm	ASTM D5185m	5	0	0		
Manganese	ppm	ASTM D5185m		<1	<1		
Magnesium	ppm	ASTM D5185m	25	0	0		
Calcium	ppm	ASTM D5185m	25	17	19		
Phosphorus	ppm	ASTM D5185m	375	201	236		
Zinc	ppm	ASTM D5185m	25	0	0		
Sulfur	ppm	ASTM D5185m	4900	5488	4099		
CONTAMINANTS	\$	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>+15	8	7		
Sodium	ppm	ASTM D5185m		2	2		
Potassium	ppm	ASTM D5185m	>20	1	0		
Water	%	ASTM D6304	>0.02	0.002	0.001		
ppm Water	ppm	ASTM D6304	>200	19.4	13.4		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647		26340	54039		
Particles >6µm		ASTM D7647	>1300	850	633		
Particles >14µm		ASTM D7647	>160	36	26		
Particles >21µm		ASTM D7647	>40	10	6		
Particles >38μm		ASTM D7647	>10	1	2		
Particles >71µm		ASTM D7647		1	0		
Oil Cleanliness		ISO 4406 (c)	>17/14	17/12	23/16/12		
FLUID DEGRADA		method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	1.10	0.36	0.39		
(17:50) Bev: 1	39	Contact/Location: DEVIN LINEHAN - NORDEX					

Report Id: NORDEX [WUSCAR] 05961227 (Generated: 09/27/2023 17:17:50) Rev: 1

Contact/Location: DEVIN LINEHAN - NORDEX



OIL ANALYSIS REPORT

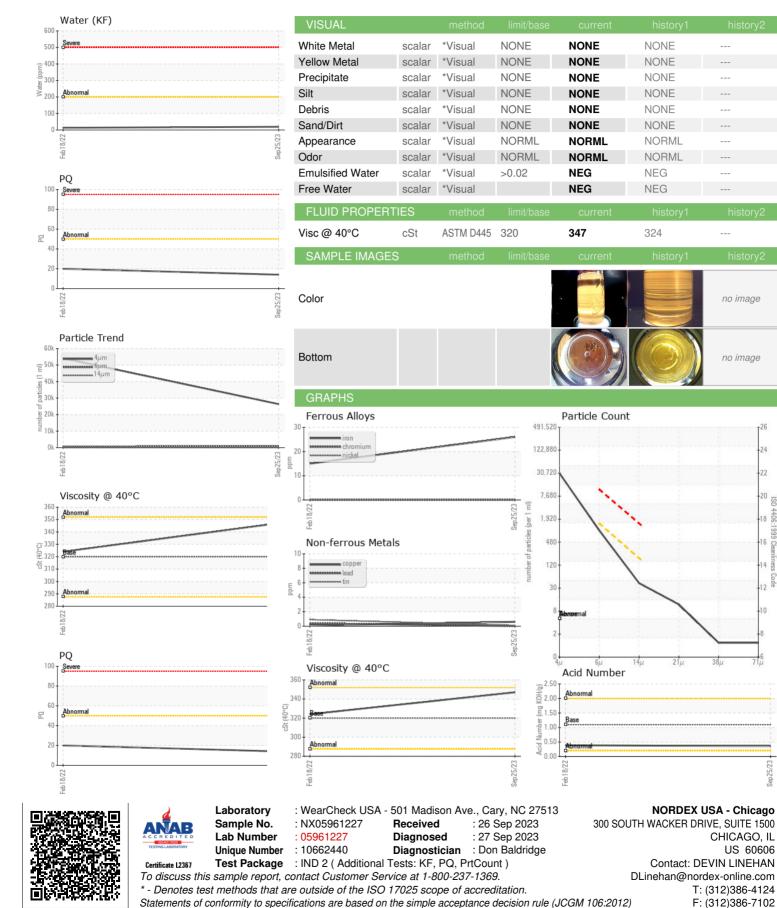

Contact/Location: DEVIN LINEHAN - NORDEX

CHICAGO, IL US 60606

T: (312)386-4124

F: (312)386-7102

no image

no image

4406

:1999 Cle

14

28