

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id **C-1** Component **Refrigeration Compressor** Fluid **STELLAR 717 HT (--- GAL)**

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|----------|--------------|------------|-------------|-------------|------------------|
| Sample Number | | Client Info | | USP0001914 | USP234256 | USP234257 |
| Sample Date | | Client Info | | 25 Sep 2023 | 10 Jan 2023 | 09 Jan 2023 |
| Machine Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | ATTENTION | ATTENTION |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >8 | <1 | 0 | <1 |
| Chromium | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >8 | <1 | 0 | 0 |
| Tin | ppm | ASTM D5185m | >4 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Calcium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Zinc | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m | | 0 | 2 | 0 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >15 | <1 | <1 | 1 |
| Sodium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 0 | <1 |
| Water | % | ASTM D6304 | >0.01 | 0.001 | 0.003 | 0.001 |
| ppm Water | ppm | ASTM D6304 | >100 | 8.8 | 29.4 | 12.8 |
| FLUID CLEANLIN | ESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | 7213 | 19740 | 🔺 15715 |
| Particles >6µm | | ASTM D7647 | >2500 | 1358 | 2308 | 4 675 |
| Particles >14µm | | ASTM D7647 | >320 | 56 | 37 | 162 |
| Particles >21µm | | ASTM D7647 | >80 | 11 | 2 | 21 |
| Particles >38µm | | ASTM D7647 | >20 | 1 | 0 | 0 |
| Particles >71µm | | ASTM D7647 | >4 | 0 | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | 20/18/13 | ▲ 21/18/12 | 2 1/19/15 |
| FLUID DEGRADA | | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D974 | | 0.012 | 0.015 | 0.01 |

Contact/Location: Service Manager - TYSSANCAL



250

200

E 150

50

100

40

20

0

250


200 Ē 150 LLC04


Ē

Cles 60 Sep27/22

Water 10

OIL ANALYSIS REPORT

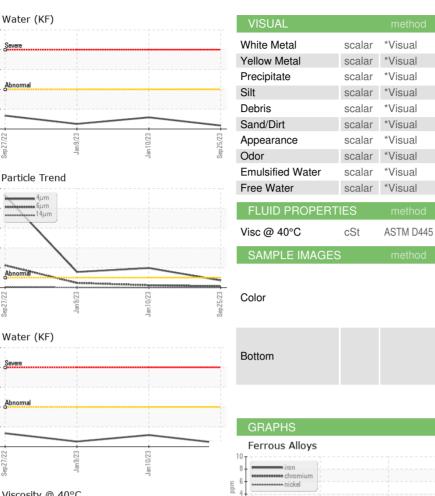



NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

67.2

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

67.4

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

67.6

NONE

NONE

NONE

NONE


NONE

NONE

NORML

NORML

>0.01

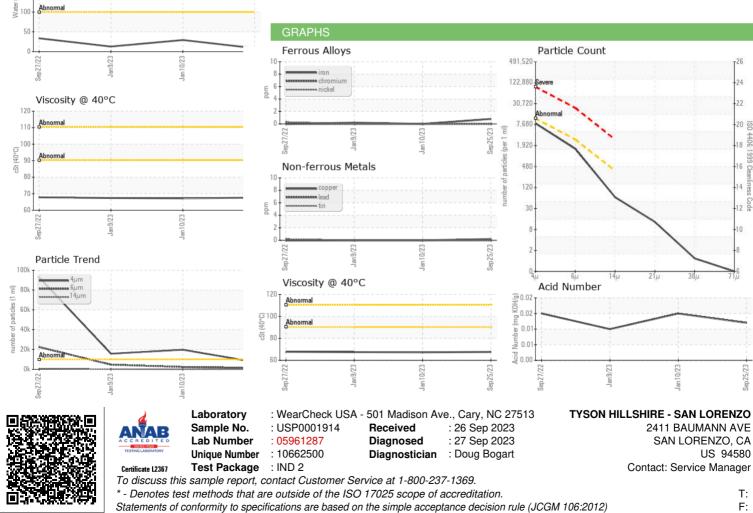

Contact/Location: Service Manager - TYSSANCAL