




PROBLEM SUMMARY




Sample Rating Trend

WEAR

Area
KANSAS/88
 Machine Id
53.167L [KANSAS^88]
 Component
Left Final Drive
 Fluid
MOBIL 75W90 (--- GAL)

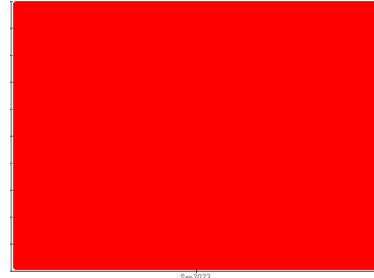

COMPONENT CONDITION SUMMARY

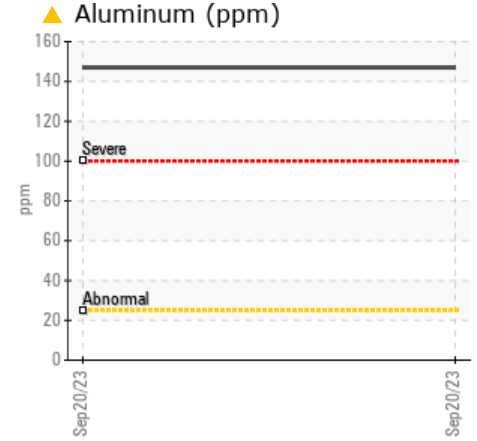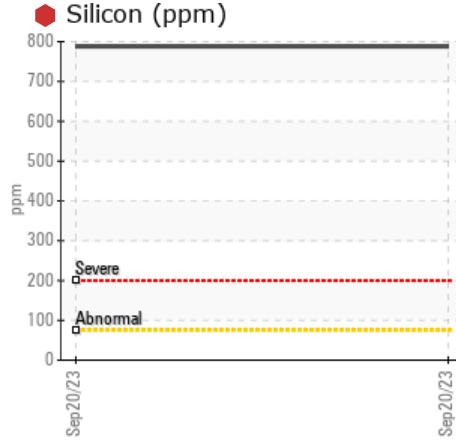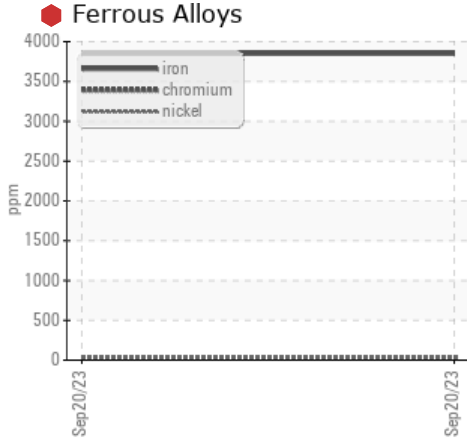

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

| Sample Status | | | | SEVERE | --- | --- |
|---------------|-----|-------------|------|-------------|-----|-----|
| Iron | ppm | ASTM D5185m | >500 | 3850 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | 37 | --- | --- |
| Nickel | ppm | ASTM D5185m | | 31 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >25 | 147 | --- | --- |
| Silicon | ppm | ASTM D5185m | >75 | 788 | --- | --- |

Customer Id: SHEWIC
 Sample No.: WC0665271
 Lab Number: 05961493
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|---------------------|--------|------|---------|---|
| Inspect Wear Source | --- | --- | ? | We advise that you inspect for the source(s) of wear. |
| Resample | --- | --- | ? | We recommend an early resample to monitor this condition. |
| Check Dirt Access | --- | --- | ? | We advise that you check all areas where dirt can enter the system. |

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

Area
KANSAS/88
 Machine Id
53.167L [KANSAS^88]
 Component
Left Final Drive
 Fluid
MOBIL 75W90 (--- GAL)

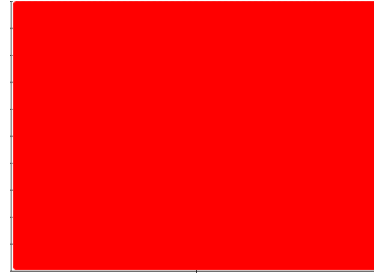

DIAGNOSIS

Recommendation

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Wear

Gear wear is indicated.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | WC0665271 | --- | --- |
| Sample Date | Client Info | | 20 Sep 2023 | --- | --- |
| Machine Age | hrs | Client Info | 2643 | --- | --- |
| Oil Age | hrs | Client Info | 2501 | --- | --- |
| Oil Changed | Client Info | | Changed | --- | --- |
| Sample Status | | | SEVERE | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-------------|---------|--------------|----------|
| Iron | ppm | ASTM D5185m | >500 | 3850 | --- |
| Chromium | ppm | ASTM D5185m | >10 | 37 | --- |
| Nickel | ppm | ASTM D5185m | | 31 | --- |
| Titanium | ppm | ASTM D5185m | | 9 | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >25 | 147 | --- |
| Lead | ppm | ASTM D5185m | >25 | <1 | --- |
| Copper | ppm | ASTM D5185m | >50 | 9 | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | --- |
| Vanadium | ppm | ASTM D5185m | | 2 | --- |
| Cadmium | ppm | ASTM D5185m | | <1 | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|---------|--------------|----------|
| Boron | ppm | ASTM D5185m | | 68 | --- |
| Barium | ppm | ASTM D5185m | | 20 | --- |
| Molybdenum | ppm | ASTM D5185m | | 8 | --- |
| Manganese | ppm | ASTM D5185m | | 30 | --- |
| Magnesium | ppm | ASTM D5185m | | 45 | --- |
| Calcium | ppm | ASTM D5185m | | 223 | --- |
| Phosphorus | ppm | ASTM D5185m | | 655 | --- |
| Zinc | ppm | ASTM D5185m | | 86 | --- |
| Sulfur | ppm | ASTM D5185m | | 18757 | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------|---------|------------|----------|
| Silicon | ppm | ASTM D5185m | >75 | 788 | --- |
| Sodium | ppm | ASTM D5185m | | 42 | --- |
| Potassium | ppm | ASTM D5185m | >20 | 60 | --- |

VISUAL


| | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|--------------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

FLUID PROPERTIES


| | method | limit/base | current | history1 | history2 |
|-------------|--------|------------|---------|------------|----------|
| Visc @ 40°C | cSt | ASTM D445 | | 150 | --- |








OIL ANALYSIS REPORT

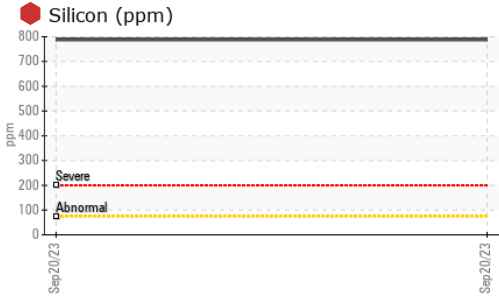

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
| Color | | | | no image | no image |
| Bottom | | | | no image | no image |

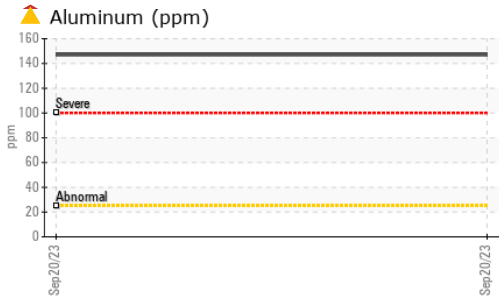

GRAPHS

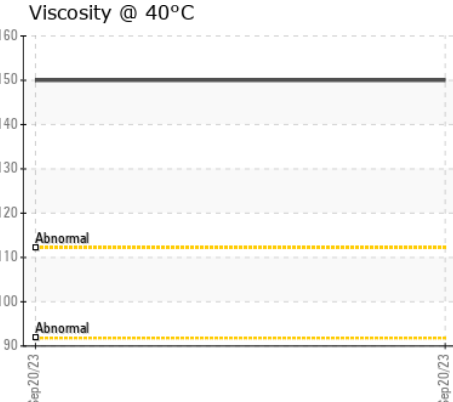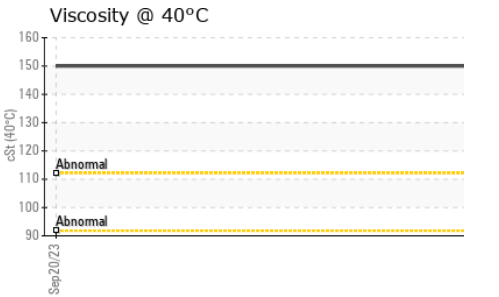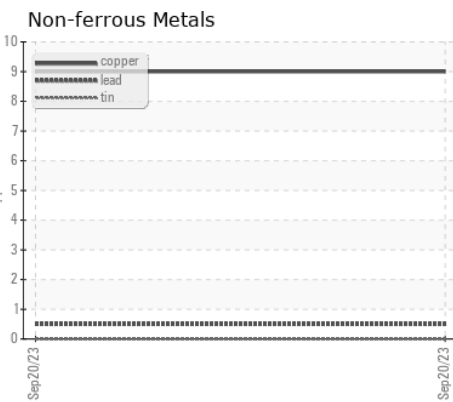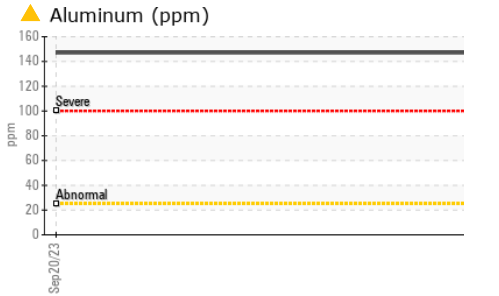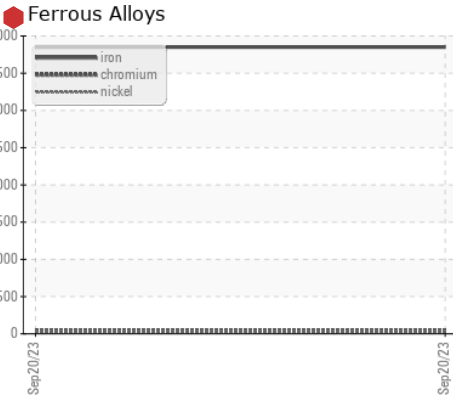

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0665271
Lab Number : 05961493
Unique Number : 10662706
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)