




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
KANSAS/44
 Machine Id
20.307L [KANSAS^44]
 Component
Left Final Drive
 Fluid
MOBIL MOBILTRANS HD 50 (1 GAL)

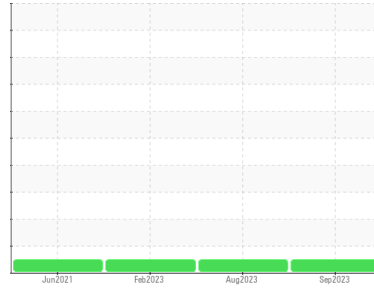

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0833900	WC0789758	WC0741815
Sample Date	Client Info		20 Sep 2023	28 Aug 2023	08 Feb 2023
Machine Age	hrs	Client Info	1580	1539	936
Oil Age	hrs	Client Info	936	603	936
Oil Changed	Client Info		N/A	Not Changd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	140	108	157
Chromium	ppm	ASTM D5185m >10	2	2	2
Nickel	ppm	ASTM D5185m >5	0	0	0
Titanium	ppm	ASTM D5185m >15	<1	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >75	3	<1	2
Lead	ppm	ASTM D5185m >10	0	0	<1
Copper	ppm	ASTM D5185m >75	1	1	4
Tin	ppm	ASTM D5185m >8	0	<1	<1
Antimony	ppm	ASTM D5185m >50	---	---	---
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	0	2
Barium	ppm	ASTM D5185m	2	0	15
Molybdenum	ppm	ASTM D5185m	<1	0	<1
Manganese	ppm	ASTM D5185m	<1	<1	1
Magnesium	ppm	ASTM D5185m	11	11	16
Calcium	ppm	ASTM D5185m	3122	3106	3327
Phosphorus	ppm	ASTM D5185m	1011	979	819
Zinc	ppm	ASTM D5185m	1237	1221	1068
Sulfur	ppm	ASTM D5185m	8320	8358	11155

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	15	10	16
Sodium	ppm	ASTM D5185m	<1	2	4
Potassium	ppm	ASTM D5185m >20	2	0	2

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG



OIL ANALYSIS REPORT

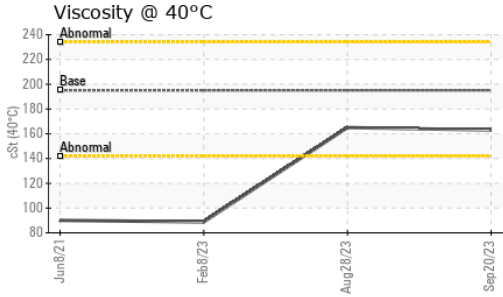




FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 195	163	165	88.8

SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

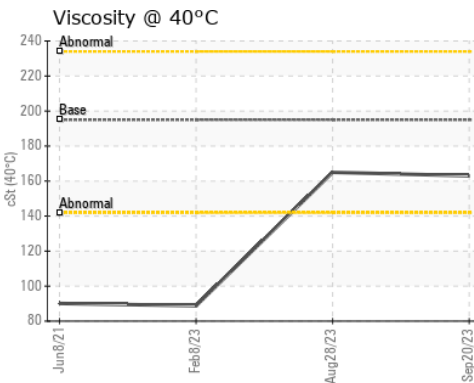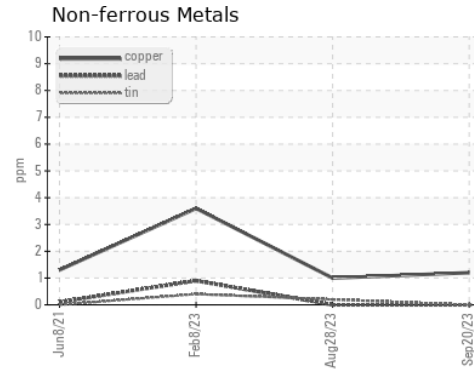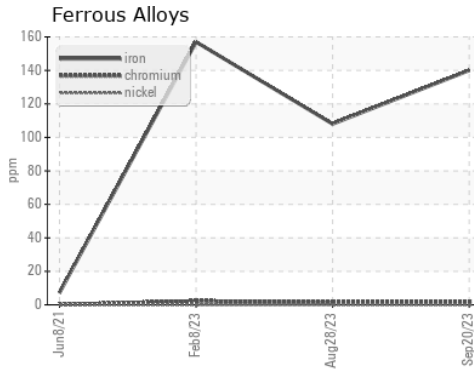

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0833900 **Received** : 26 Sep 2023
Lab Number : 05961494 **Diagnosed** : 27 Sep 2023
Unique Number : 10662707 **Diagnostician** : Doug Bogart
Test Package : CONST

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: RANDY ROBERTS
 randy.roberts@sherwood.net
 T: (316)943-6491
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)