

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

82382 WEST TEST STAND - TRONAIR

Component

Hydraulic System

82382 (100 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


, 111 0 10, 111	•			Sen 2023			V	
SAMPLE INFORMA	ATION	method	limit/base	current		nistory1		history2
	ATION		IIIIII Dasc		•	listory i		Thistory Z
Sample Number		Client Info		PH0002023				
Sample Date		Client Info		07 Sep 2023				
Machine Age	hrs	Client Info		0				
Oil Age	hrs	Client Info		0				
Oil Changed		Client Info		N/A				
Sample Status				NORMAL				

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	0		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		

ADDITIVES		method			history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		4		
Calcium	ppm	ASTM D5185m		6		
Phosphorus	ppm	ASTM D5185m		708		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		51		
CONTAMINANTS	;	method	limit/base	current	history1	history2


Silicon	ppm	ASTM D5185m	>15	3		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>10000	2125		
Particles >6µm		ASTM D7647	>2500	437		
Particles >14µm		ASTM D7647	>320	56		
Particles >21µm		ASTM D7647	>80	17		

· • · · · · · · · · · · · · · · · · · ·					
Particles >38μm		ASTM D7647	>20	1	
Particles >71µm		ASTM D7647	>4	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/16/13	
FLUID DEGRADA	TION	method			history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.041	

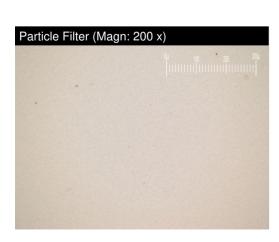



OIL ANALYSIS REPORT

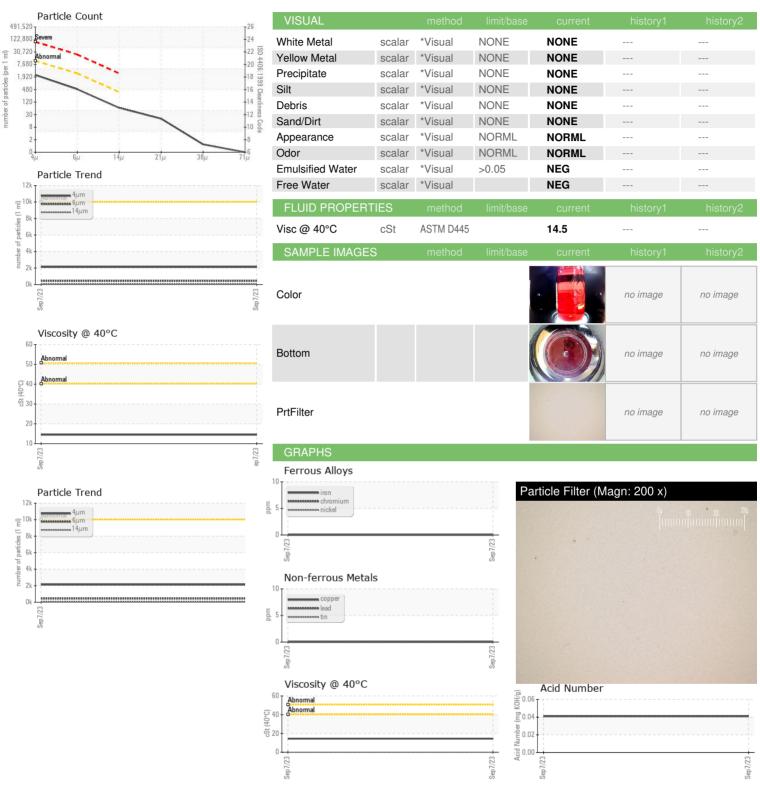



Certificate L2367

Laboratory Sample No. Lab Number

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PH0002023 : 05961547

Unique Number : 10662760

Test Package : PLANT (Additional Tests: KF, PrtFilter) To discuss this sample report, contact Customer Service at 1-800-237-1369.

Received

Diagnosed

: 26 Sep 2023

: 28 Sep 2023

Diagnostician : Doug Bogart

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PARKER HANNIFIN CORPORATION-OIL LAB

501 MADISON AVENUE CARY, NC

US 27513 Contact: JAY GRONBACH

jay.gronbach@parker.com

T: F: