




# PROBLEM SUMMARY

Sample Rating Trend

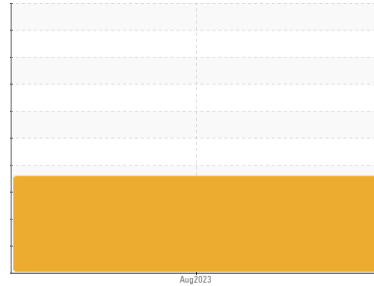


**WEAR**




Machine Id  
**124**  
 Component  
**Hydraulic System**  
 Fluid  
**PETRO CANADA 10W (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Non-ferrous Metals

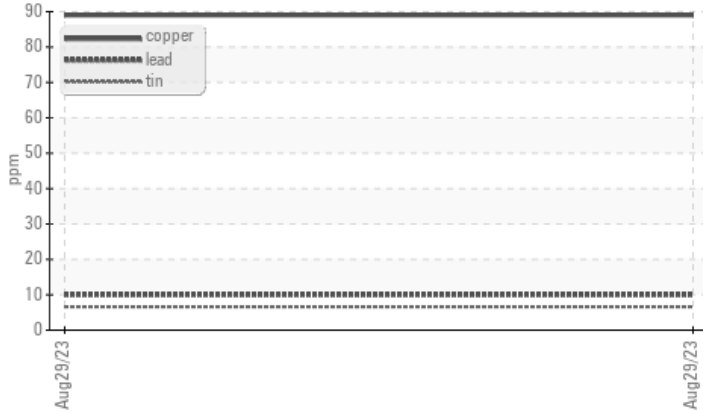

### ▲ Particle Trend

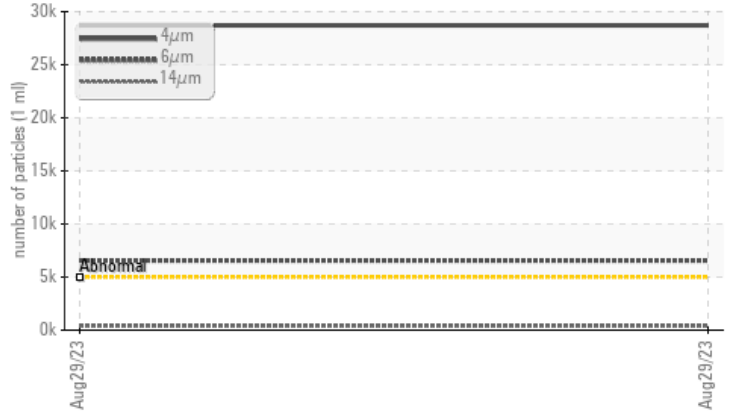

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status	ABNORMAL	---	---
Lead ppm ASTM D5185m >10	▲ 10	---	---
Copper ppm ASTM D5185m >75	▲ 89	---	---
Particles >4µm ASTM D7647 >5000	▲ 28701	---	---
Particles >6µm ASTM D7647 >1300	▲ 6555	---	---
Particles >14µm ASTM D7647 >160	▲ 380	---	---
Particles >21µm ASTM D7647 >40	▲ 89	---	---
Oil Cleanliness ISO 4406 (c) >19/17/14	▲ 22/20/16	---	---

Customer Id: CLBMYR  
 Sample No.: WC0517486  
 Lab Number: 05961727  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS


Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

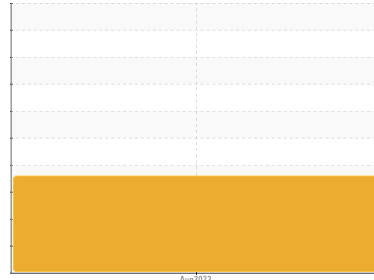

**WEAR**



Machine Id  
**124**  
 Component  
**Hydraulic System**  
 Fluid  
**PETRO CANADA 10W (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### ▲ Wear

Bearing and/or bushing wear is indicated.

### ▲ Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0517486</b>	---	---
Sample Date	Client Info	<b>29 Aug 2023</b>	---	---
Machine Age	hrs Client Info	<b>5482</b>	---	---
Oil Age	hrs Client Info	<b>307</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	<b>14</b>	---	---
Chromium ppm ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel ppm ASTM D5185m	>10	<b>0</b>	---	---
Titanium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Silver ppm ASTM D5185m		<b>0</b>	---	---
Aluminum ppm ASTM D5185m	>10	<b>4</b>	---	---
Lead ppm ASTM D5185m	>10	<b>▲ 10</b>	---	---
Copper ppm ASTM D5185m	>75	<b>▲ 89</b>	---	---
Tin ppm ASTM D5185m	>10	<b>7</b>	---	---
Vanadium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium ppm ASTM D5185m		<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m		<b>47</b>	---	---
Barium ppm ASTM D5185m		<b>0</b>	---	---
Molybdenum ppm ASTM D5185m		<b>3</b>	---	---
Manganese ppm ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium ppm ASTM D5185m		<b>41</b>	---	---
Calcium ppm ASTM D5185m		<b>1501</b>	---	---
Phosphorus ppm ASTM D5185m		<b>803</b>	---	---
Zinc ppm ASTM D5185m		<b>1049</b>	---	---
Sulfur ppm ASTM D5185m		<b>2349</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>20	<b>5</b>	---	---
Sodium ppm ASTM D5185m		<b>5</b>	---	---
Potassium ppm ASTM D5185m	>20	<b>3</b>	---	---

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>5000	<b>▲ 28701</b>	---	---
Particles >6µm ASTM D7647	>1300	<b>▲ 6555</b>	---	---
Particles >14µm ASTM D7647	>160	<b>▲ 380</b>	---	---
Particles >21µm ASTM D7647	>40	<b>▲ 89</b>	---	---
Particles >38µm ASTM D7647	>10	<b>4</b>	---	---
Particles >71µm ASTM D7647	>3	<b>1</b>	---	---
Oil Cleanliness ISO 4406 (c)	>19/17/14	<b>▲ 22/20/16</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045		<b>0.70</b>	---	---



# OIL ANALYSIS REPORT

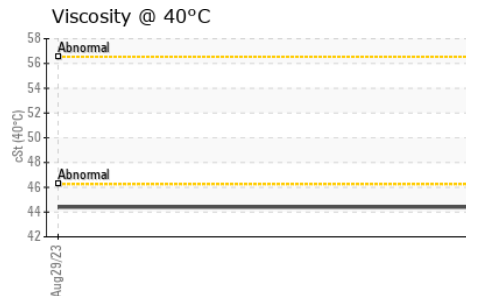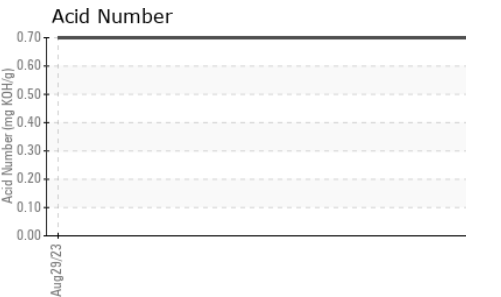
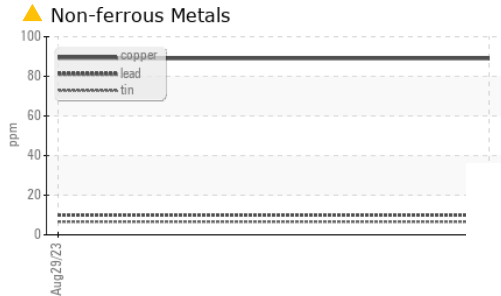
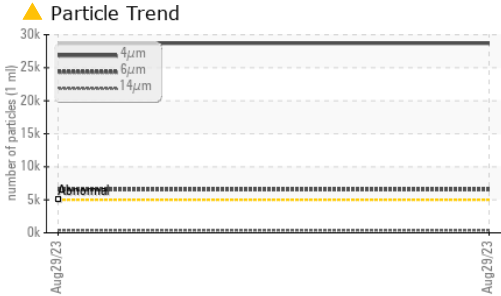
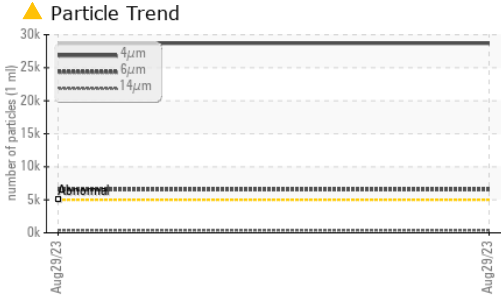


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.4	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

### GRAPHS

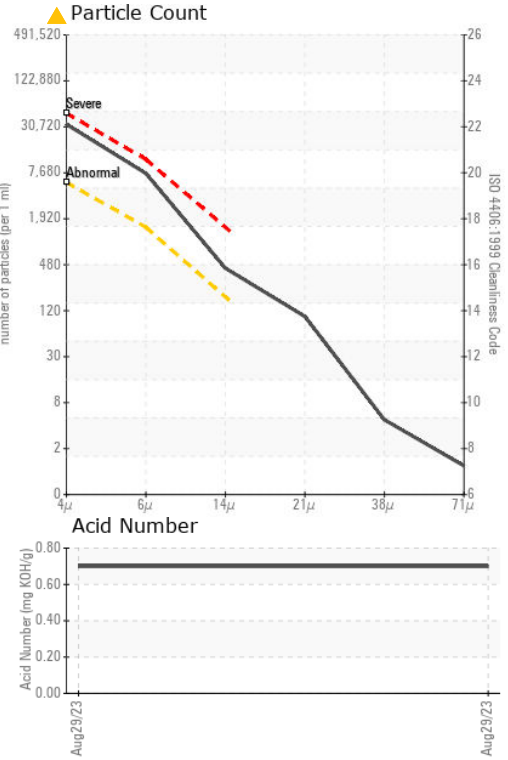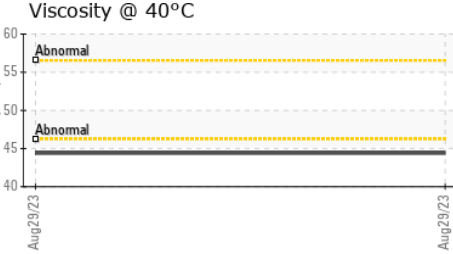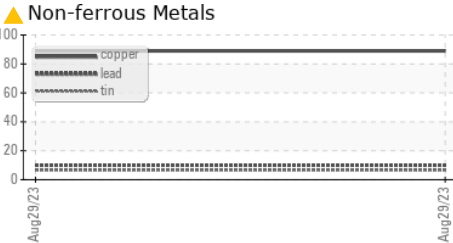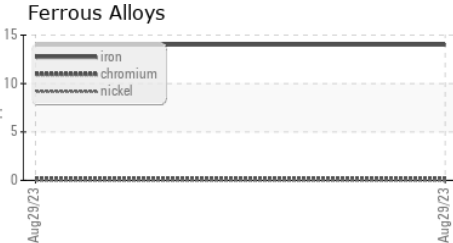

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0517486 **Received** : 26 Sep 2023  
**Lab Number** : 05961727 **Diagnosed** : 28 Sep 2023  
**Unique Number** : 10662940 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**C.L. BENTON & SONS INC**  
 706 38TH AVE N  
 MYRTLE BEACH, SC  
 US 29577  
 Contact: NEIL  
 neil@clbenton.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)