


PROBLEM SUMMARY

Machine Id **1413896 (S/N 1010)** Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

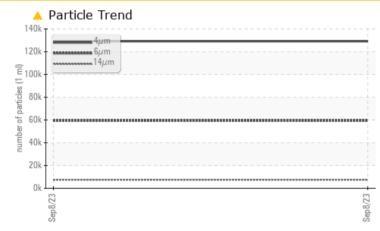

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

THOBELINATIO TEOTHEODETO									
Sample Status				ABNORMAL					
Particles >6µm		ASTM D7647	>1300	<u> </u>					
Particles >14µm		ASTM D7647	>80	A 7473					
Particles >21µm		ASTM D7647	>20	<u> </u>					
Particles >38µm		ASTM D7647	>4	A 136					
Particles >71µm		ASTM D7647	>3	<u> </u>					
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 24/23/20					
Debris	scalar	*Visual	NONE	A MODER					


Customer Id: DDPGOW Sample No.: KCPA000694 Lab Number: 05961747 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

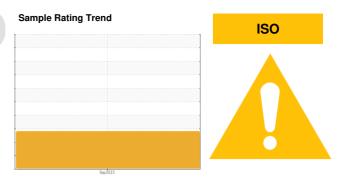

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO

Machine Id **1413896 (S/N 1010)** Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil. Moderate concentration of visible dirt/debris present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Sample Number Sample Date						
Sample Date		Client Info		KCPA000694		
		Client Info		08 Sep 2023		
Machine Age	hrs	Client Info		87740		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	3		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm		>50	16		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m	U	۰ <1		
Magnesium	ppm	ASTM D5185m	100	1		
Calcium	ppm		0	3		
Phosphorus		ASTM D5185m	0	18		
Zinc	ppm		0	13		
Sulfur	ppm ppm	ASTM D5185m	23500	17536		
		method	limit/base			
CONTAMINANTS Silicon				current	history1	history2
	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m	00	2		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.05	0.005		
ppm Water	ppm	ASTM D6304		56.6		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		129174		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<u> </u>		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	<u> </u>		
Particles >71µm		ASTM D7647	>3	<u> </u>		
		ISO 4406 (c)	>/17/13	A 24/23/20		
Oil Cleanliness		. ,				
Oil Cleanliness FLUID DEGRADA	TION	method	limit/base	current	history1	history2





Built for a lifetime







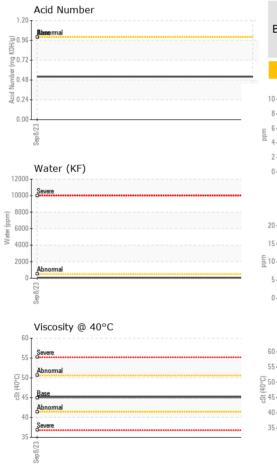

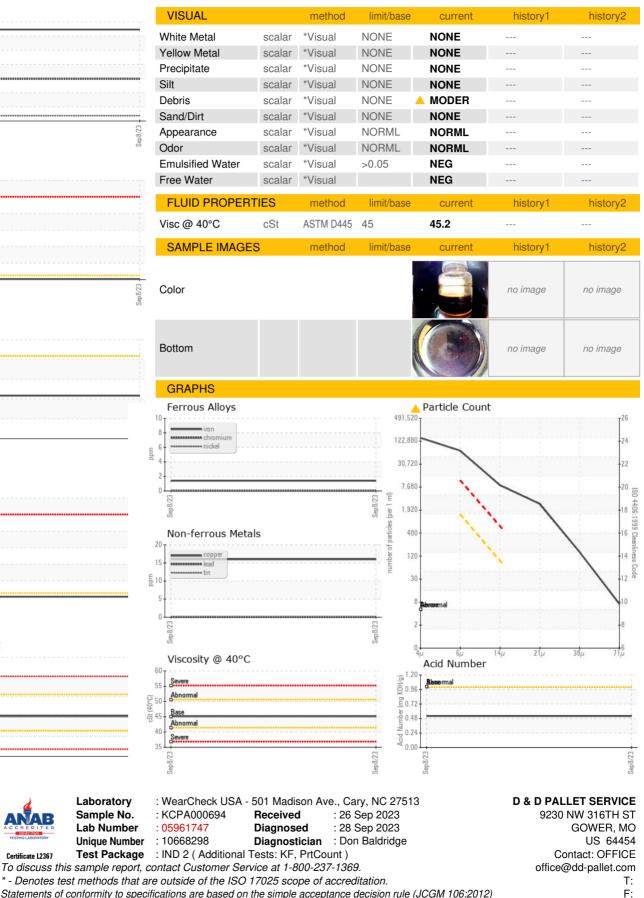

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367