



PROBLEM SUMMARY


KAESER SM 10 4394402 (S/N 1189)

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

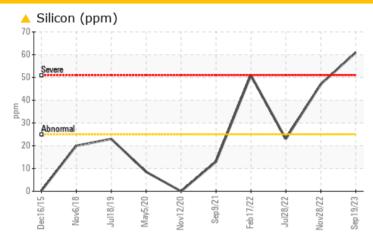

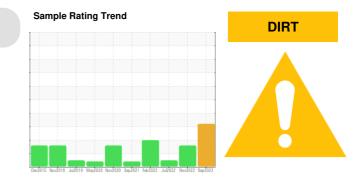

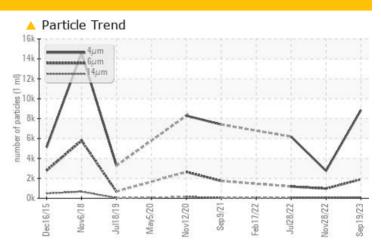

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

FROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL	ABNORMAL	NORMAL	
Silicon	ppm	ASTM D5185m	>25	<u> </u>	4 7	23	
Particles >6µm		ASTM D7647	>1300	 1901	974	1178	
Particles >14µm		ASTM D7647	>80	<mark>/</mark> 99	79	77	
Particles >21µm		ASTM D7647	>20	<u> </u>	19	20	
Oil Cleanliness		ISO 4406 (c)	>17/13	<u> </u>	17/13	17/13	

Customer Id: HMUCHA Sample No.: KCPA000954 Lab Number: 05961755 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

28 Nov 2022 Diag: Jonathan Hester

DIRT



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. Elemental level of silicon (Si) above normal indicating ingress of seal material. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

28 Jul 2022 Diag: Jonathan Hester



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of

any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view repor



DIRT

17 Feb 2022 Diag: Angela Borella

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Elemental level of silicon (Si) above normal indicating ingress of seal material. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.





OIL ANALYSIS REPORT

Machine Id KAESER SM 10 4394402 (S/N 1189) Component

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil. Elemental level of silicon (Si) above normal.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

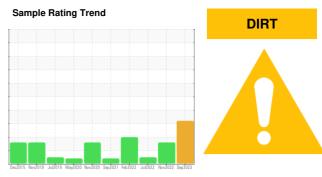


	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA000954	KCP52285	KCP51839
Sample Date		Client Info		19 Sep 2023	28 Nov 2022	28 Jul 2022
Machine Age	hrs	Client Info		82092	79862	78503
Oil Age	hrs	Client Info		0	2000	500
Oil Changed		Client Info		N/A	Not Changd	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm			0	0	0
	ppm	ASTM D5185m	>10	-		
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	3	1	1
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>50	3	2	<1
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	2
Barium	ppm	ASTM D5185m	90	39	53	68
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	100	80	82	89
Calcium	ppm	ASTM D5185m	0	4	<1	5
Phosphorus	ppm	ASTM D5185m	0	2	9	3
Zinc	ppm	ASTM D5185m	0	2	3	2
Sulfur	ppm	ASTM D5185m	23500	20670	24237	22127
CONTAMINANTS		method	limit/base	current	history1	history2
CONTAMINANTS Silicon		Method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	limit/base	▲ 61	▲ 47	23
Silicon Sodium	ppm ppm	ASTM D5185m ASTM D5185m	>25	▲ 61 28	▲ 47 14	23 18
Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	▲ 61 28 5	▲ 47 14 2	23 18 1
Silicon Sodium Potassium Water	ppm ppm ppm %	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	▲ 61 28 5 0.031	 ▲ 47 14 2 0.021 	23 18 1 0.027
Silicon Sodium Potassium Water ppm Water	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>25 >20 >0.05 >500	 ▲ 61 28 5 0.031 317.2 	 47 14 2 0.021 214.7 	23 18 1 0.027 273.2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>25 >20 >0.05	 ▲ 61 28 5 0.031 317.2 current 	 47 14 2 0.021 214.7 history1 	23 18 1 0.027 273.2 history2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method ASTM D7647	>25 >20 >0.05 >500 limit/base	 ▲ 61 28 5 0.031 317.2 current 8862 	 47 14 2 0.021 214.7 history1 2753 	23 18 1 0.027 273.2 history2 6185
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300	 ▲ 61 28 5 0.031 317.2 current 8862 ▲ 1901 	 47 14 2 0.021 214.7 history1 2753 974 	23 18 1 0.027 273.2 history2 6185 1178
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	 ▲ 61 28 5 0.031 317.2 current 8862 ▲ 1901 ▲ 99 	 47 14 2 0.021 214.7 history1 2753 974 79 	23 18 1 0.027 273.2 history2 6185 1178 77
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20	 ▲ 61 28 5 0.031 317.2 current 8862 ▲ 1901 ▲ 99 ▲ 24 	 ▲ 47 14 2 0.021 214.7 ▶istory1 2753 974 79 19 	23 18 1 0.027 273.2 history2 6185 1178 77 20
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	 ▲ 61 28 5 0.031 317.2 current 8862 ▲ 1901 ▲ 99 ▲ 24 2 	 ▲ 47 14 2 0.021 214.7 ▶istory1 2753 974 79 19 1 	23 18 1 0.027 273.2 history2 6185 1178 77 20 2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	 ▲ 61 28 5 0.031 317.2 current 8862 ▲ 1901 ▲ 99 ▲ 24 2 0 	 ▲ 47 14 2 0.021 214.7 bistory1 2753 974 79 19 1 0	23 18 1 0.027 273.2 history2 6185 1178 77 20 2 0
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm % ppm	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	 ▲ 61 28 5 0.031 317.2 current 8862 ▲ 1901 ▲ 99 ▲ 24 2 	 ▲ 47 14 2 0.021 214.7 ▶istory1 2753 974 79 19 1 	23 18 1 0.027 273.2 history2 6185 1178 77 20 2
Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm % ppm ESS	ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	 ▲ 61 28 5 0.031 317.2 current 8862 ▲ 1901 ▲ 99 ▲ 24 2 0 	 ▲ 47 14 2 0.021 214.7 bistory1 2753 974 79 19 1 0	23 18 1 0.027 273.2 history2 6185 1178 77 20 2 0


Report Id: HMUCHA [WUSCAR] 05961755 (Generated: 09/28/2023 10:59:04) Rev: 1


Contact/Location: ? ? - HMUCHA




OIL ANALYSIS REPORT

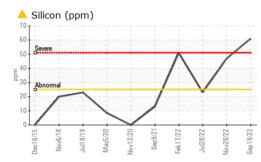

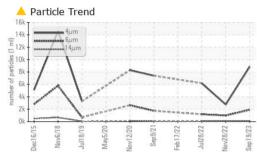


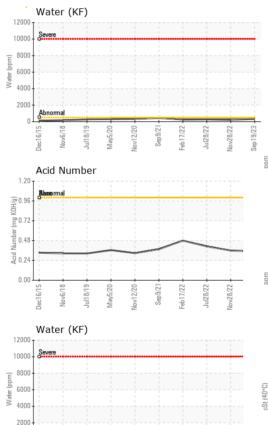

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	49.1	47.7	48.0
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				3.		



Bottom

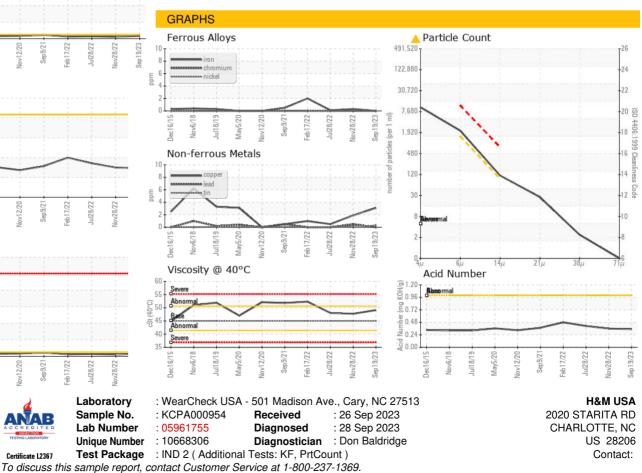

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F:

Certificate L2367

c//1/ha