


# PROBLEM SUMMARY


Sample Rating Trend

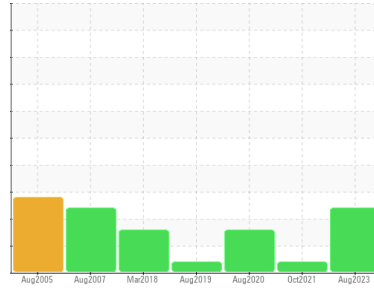

Machine Id  
**KAESER SM-11 2143835 (S/N 1314)**  
Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

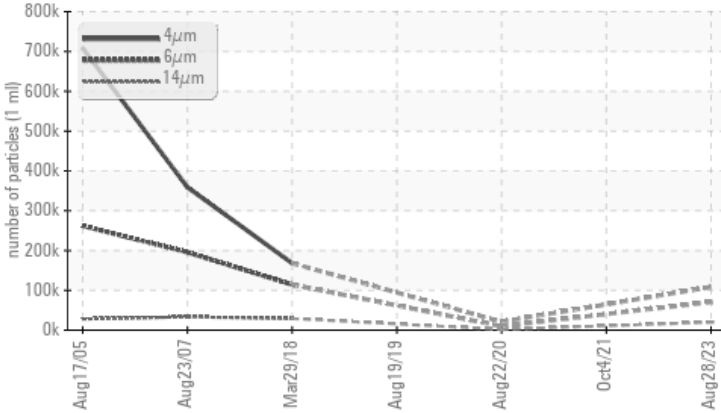

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ISO 4406 (c)	ABNORMAL	ABNORMAL	ABNORMAL
Particles >6µm	>1300	▲ 70727	---	▲ 9698	---
Particles >14µm	>80	▲ 19562	---	▲ 1839	---
Particles >21µm	>20	▲ 7493	---	▲ 639	---
Particles >38µm	>4	▲ 316	---	▲ 49	---
Particles >71µm	>3	▲ 9	---	1	---
Oil Cleanliness	>--/17/13	▲ 24/23/21	---	▲ 20/18	---

Customer Id: BRYLAW  
Sample No.: KCPA004765  
Lab Number: 05961756  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 04 Oct 2021 Diag: Jonathan Hester

#### VIS DEBRIS



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 22 Aug 2020 Diag: Angela Borella

#### ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 19 Aug 2019 Diag: Jonathan Hester

#### VIS DEBRIS



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

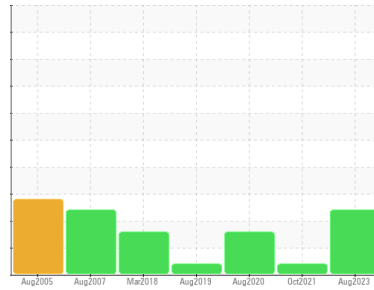

ISO



Machine Id  
**KAESER SM-11 2143835 (S/N 1314)**

Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA004765</b>	KCP38662	KCP24988
Sample Date	Client Info		<b>28 Aug 2023</b>	04 Oct 2021	22 Aug 2020
Machine Age	hrs	Client Info	<b>42454</b>	37763	35315
Oil Age	hrs	Client Info	<b>0</b>	2448	2000
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	1	<1
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >10	<b>3</b>	0	0
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>13</b>	5	5
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	<1	<1
Barium	ppm	ASTM D5185m 90	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 90	<b>3</b>	38	32
Calcium	ppm	ASTM D5185m 2	<b>1</b>	<1	0
Phosphorus	ppm	ASTM D5185m	<b>2</b>	0	3
Zinc	ppm	ASTM D5185m	<b>4</b>	10	2
Sulfur	ppm	ASTM D5185m	<b>16673</b>	15663	15468

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	0
Sodium	ppm	ASTM D5185m	<b>2</b>	13	9
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	<1
Water	%	ASTM D6304 >0.05	<b>0.004</b>	0.017	0.023
ppm Water	ppm	ASTM D6304 >500	<b>42.3</b>	177.8	230.0






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>108595</b>	---	20842
Particles >6µm	ASTM D7647	>1300	<b>▲ 70727</b>	---	▲ 9698
Particles >14µm	ASTM D7647	>80	<b>▲ 19562</b>	---	▲ 1839
Particles >21µm	ASTM D7647	>20	<b>▲ 7493</b>	---	▲ 639
Particles >38µm	ASTM D7647	>4	<b>▲ 316</b>	---	▲ 49
Particles >71µm	ASTM D7647	>3	<b>▲ 9</b>	---	1
Oil Cleanliness	ISO 4406 (c)	>--/17/13	<b>▲ 24/23/21</b>	---	▲ 20/18

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.32</b>	0.318	0.349


# OIL ANALYSIS REPORT

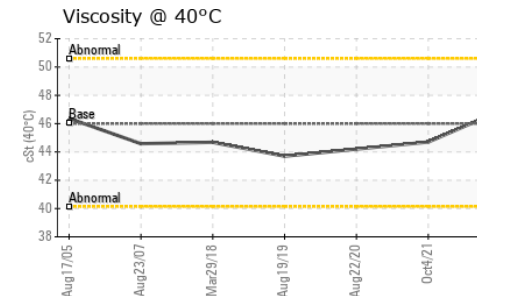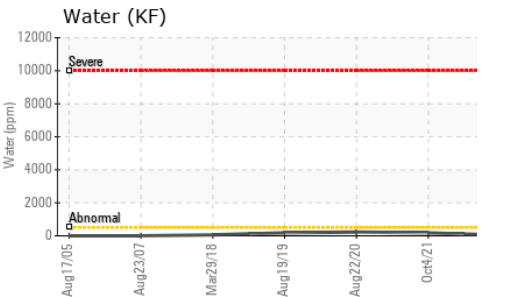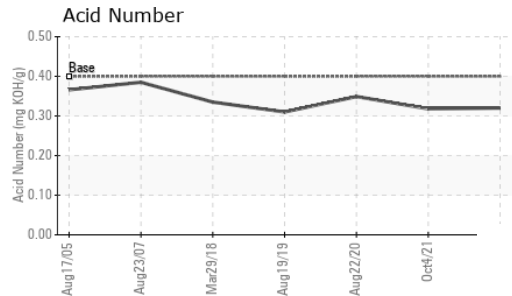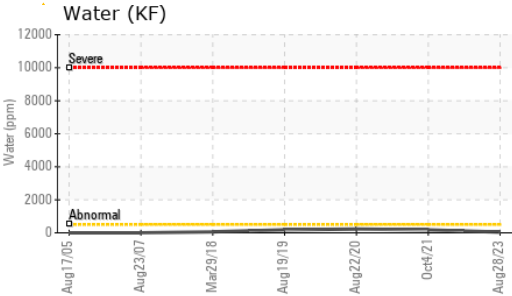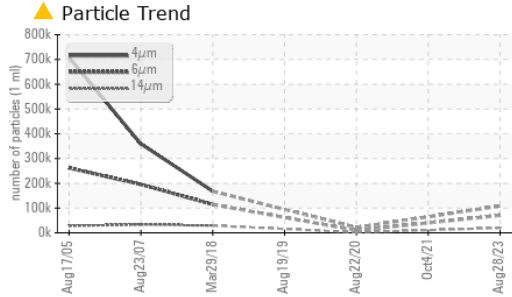






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	46.9	44.7	44.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

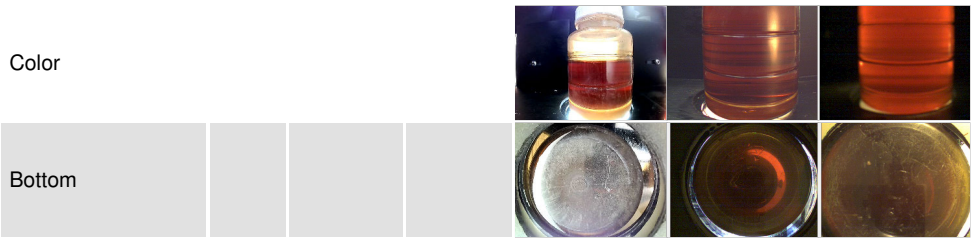

## GRAPHS

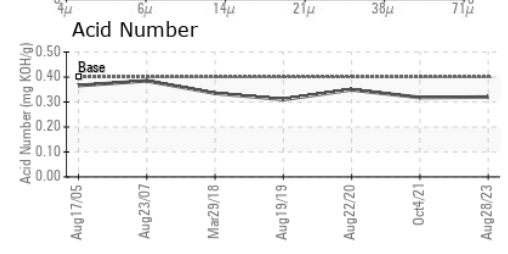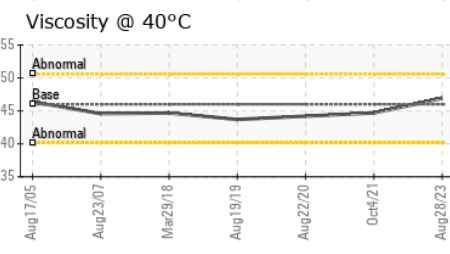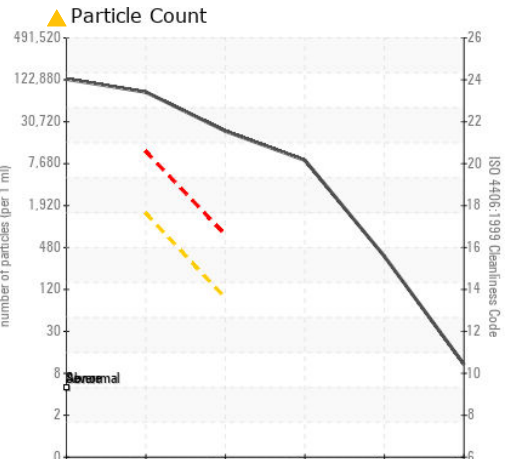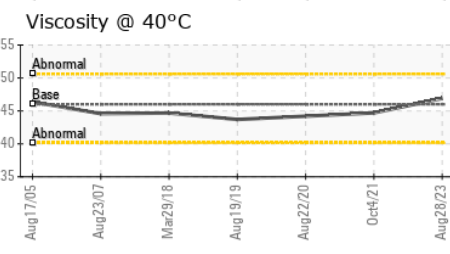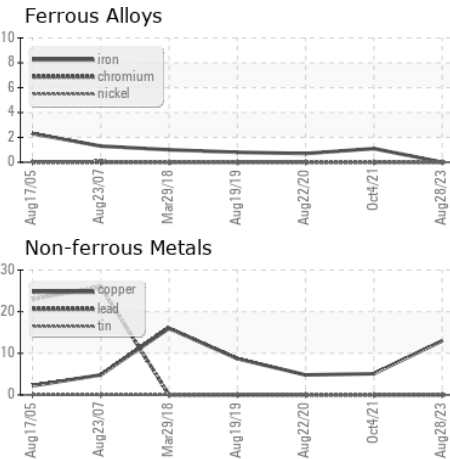

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA004765 **Received** : 26 Sep 2023  
**Lab Number** : 05961756 **Diagnosed** : 28 Sep 2023  
**Unique Number** : 10668307 **Diagnostician** : Don Baldrige

**DREAM COLLISION**  
 1214 E. 23RD ST.  
 LAWRENCE, KS  
 US 66046  
 Contact: SERVICE MANAGER  
 MAEHRING@DREAMAUTOMOTIVE.COM

**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: