




PROBLEM SUMMARY

Sample Rating Trend

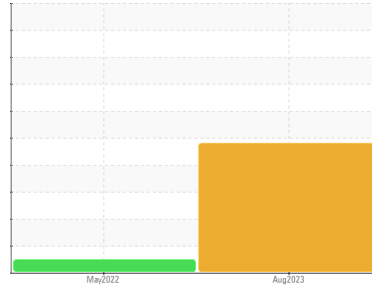


DEGRADATION




Machine Id
KAESER DSG 290-2W 7905777 (S/N 1315)
 Component
Compressor
 Fluid
G-680 (--- GAL)

COMPONENT CONDITION SUMMARY

Acid Number

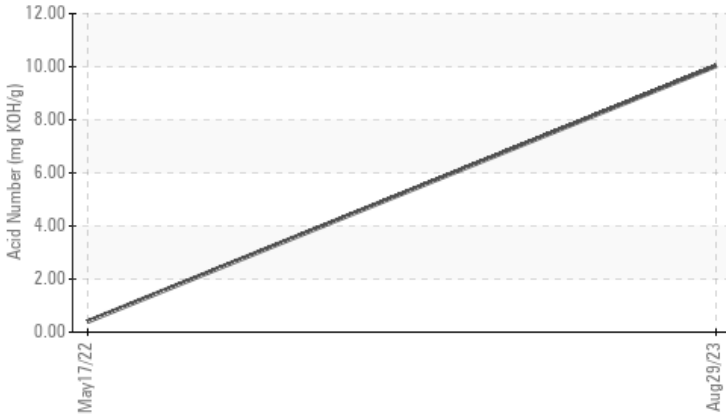

Water (KF)

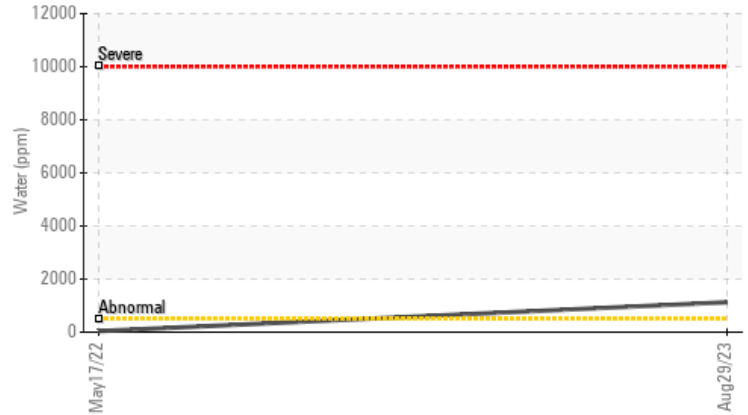

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	---
Water	%	ASTM D6304	>0.05	▲ 0.112	0.003	---
ppm Water	ppm	ASTM D6304	>500	▲ 1126.0	39.9	---
Acid Number (AN)	mg KOH/g	ASTM D8045		● 10.03	0.40	---

Customer Id: HUHDES
 Sample No.: KC124525
 Lab Number: 05961761
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.

HISTORICAL DIAGNOSIS

17 May 2022 Diag: Angela Borella

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. Viscosity of sample indicates oil is within ISO 46 range, advise investigate. Confirm oil type. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

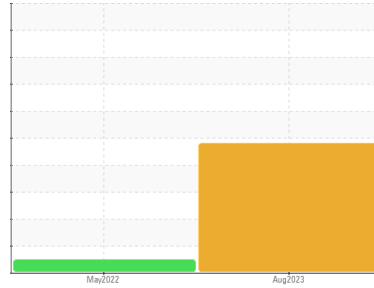

DEGRADATION



Machine Id
KAESER DSG 290-2W 7905777 (S/N 1315)
 Component
Compressor
 Fluid
G-680 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is above the recommended limit. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KC124525	KC96818	---
Sample Date	Client Info		29 Aug 2023	17 May 2022	---
Machine Age	hrs	Client Info	10982	4904	---
Oil Age	hrs	Client Info	0	4904	---
Oil Changed	Client Info		N/A	Not Changd	---
Sample Status			SEVERE	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	0	---
Chromium	ppm	ASTM D5185m >10	0	0	---
Nickel	ppm	ASTM D5185m >3	0	0	---
Titanium	ppm	ASTM D5185m >3	<1	0	---
Silver	ppm	ASTM D5185m >2	0	<1	---
Aluminum	ppm	ASTM D5185m >10	3	0	---
Lead	ppm	ASTM D5185m >10	2	0	---
Copper	ppm	ASTM D5185m >50	3	7	---
Tin	ppm	ASTM D5185m >10	<1	0	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	0	0	---
Manganese	ppm	ASTM D5185m	<1	0	---
Magnesium	ppm	ASTM D5185m	4	<1	---
Calcium	ppm	ASTM D5185m	2	0	---
Phosphorus	ppm	ASTM D5185m	1366	1	---
Zinc	ppm	ASTM D5185m	22	0	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	1	---
Sodium	ppm	ASTM D5185m	2	0	---
Potassium	ppm	ASTM D5185m >20	3	<1	---
Water	%	ASTM D6304 >0.05	▲ 0.112	0.003	---
ppm Water	ppm	ASTM D6304 >500	▲ 1126.0	39.9	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		1504	301	---
Particles >6µm	ASTM D7647 >1300		422	81	---
Particles >14µm	ASTM D7647 >80		22	12	---
Particles >21µm	ASTM D7647 >20		6	3	---
Particles >38µm	ASTM D7647 >4		1	0	---
Particles >71µm	ASTM D7647 >3		0	0	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	18/16/12	15/14/11	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	10.03	0.40	---


OIL ANALYSIS REPORT

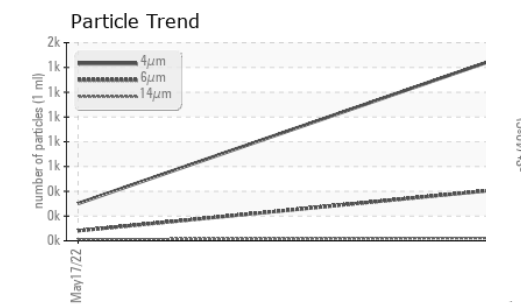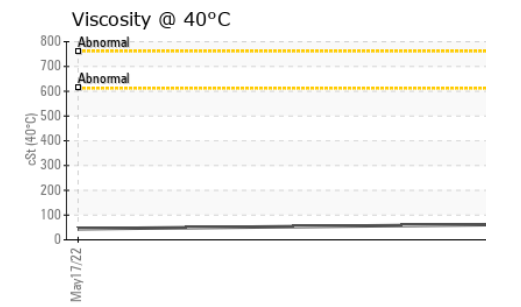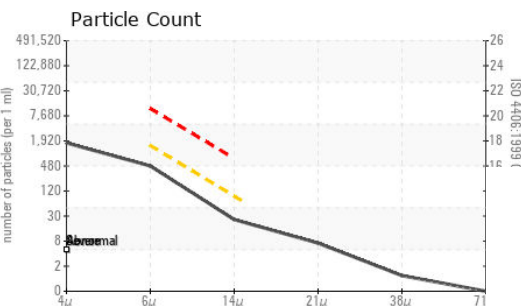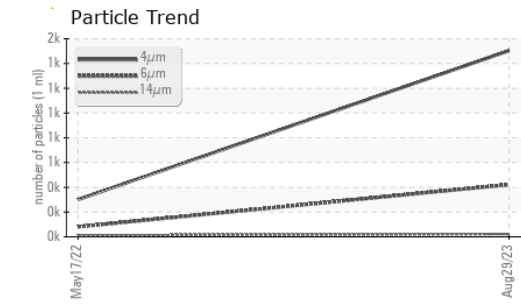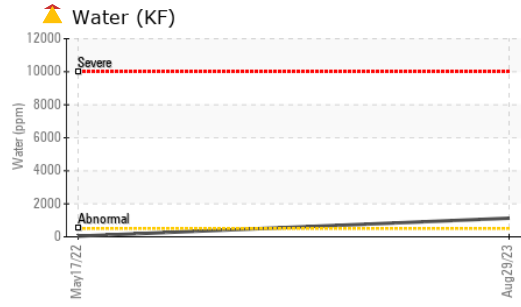





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	62.2	44.6	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

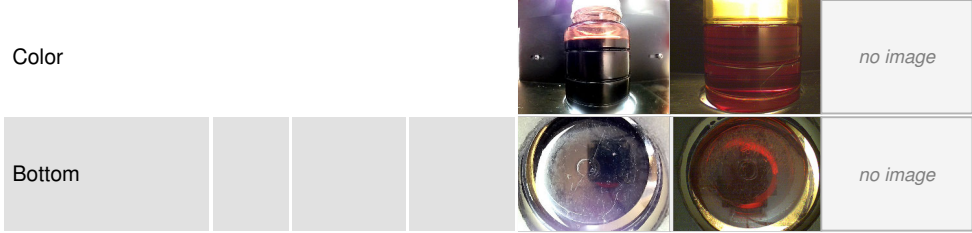

GRAPHS

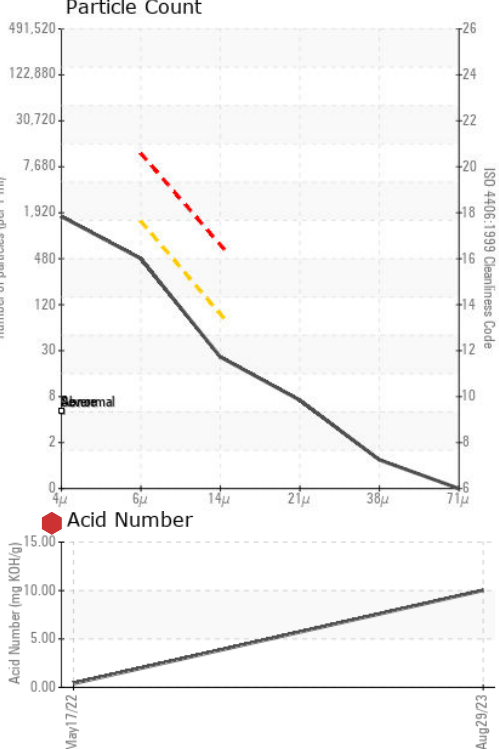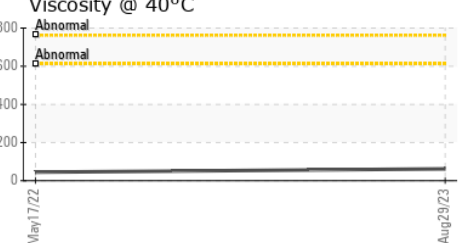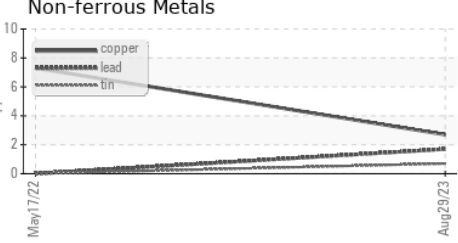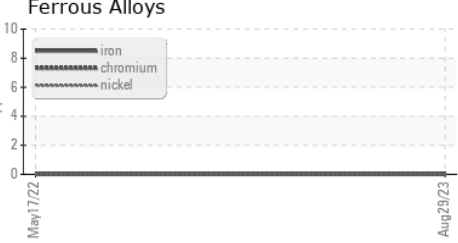

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC124525 **Received** : 26 Sep 2023
Lab Number : 05961761 **Diagnosed** : 28 Sep 2023
Unique Number : 10668312 **Diagnostician** : Doug Bogart
Test Package : IND 2

HUHTAMAKI PACKAGING
 9201 PACKAGING DR
 DESOTO, KS
 US 66018
 Contact: TRENTON ST JOHN
 trenton.stjohn@huhtamaki.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)