



### **PROBLEM SUMMARY**

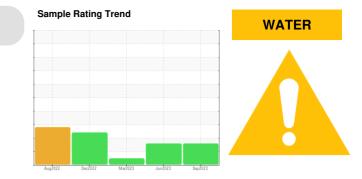

# BUSCH VP-8C (S/N 5602374)

Component Vacuum Pump Fluid USPI VAC 100 (--- GAL)

### COMPONENT CONDITION SUMMARY

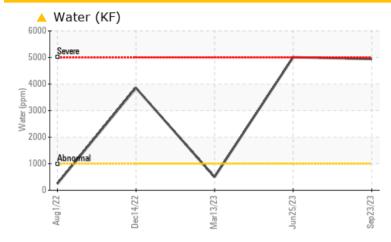

### RECOMMENDATION

We advise that you follow the water drain-off procedure for this component. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status				ABNORMAL	ABNORMAL	NORMAL			
Water	%	ASTM D6304	>.1	<b>6</b> 0.494	<b>0.501</b>	0.049			
ppm Water	ppm	ASTM D6304	>1000	<u> </u>	<b>6</b> 5010	497.7			

Customer Id: TYSAMAPRO Sample No.: USPM29769 Lab Number: 05961769 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Doug Bogart +1 (800)237-1369 x4016 <u>dougb@wearcheckusa.com</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED AC	TIONS			
Action	Status	Date	Done By	Description
Water Drain-off			?	We advise that you follow the water drain-off procedure for this component.

### **HISTORICAL DIAGNOSIS**



25 Jun 2023 Diag: Doug Bogart



We advise that you follow the water drain-off procedure for this component. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate concentration of water present in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



view report

### 13 Mar 2023 Diag: Doug Bogart



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### 14 Dec 2022 Diag: Jonathan Hester

We advise that you check for the source of water entry. Resample at the next service interval to monitor.All component wear rates are normal. Appearance is hazy. There is a moderate concentration of water present in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid.









### **OIL ANALYSIS REPORT**

Sample Rating Trend



BUSCH VP-8C (S/N 5602374) Component Vacuum Pump Fluic

**USPI VAC 100 (--- GAL)** 

### DIAGNOSIS

Machine Ic

### Recommendation

We advise that you follow the water drain-off procedure for this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USPM29769	USPM27165	USPM27588
Sample Date		Client Info		23 Sep 2023	25 Jun 2023	13 Mar 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	0
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m	20	<1	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	0	0
Lead		ASTM D5185m	>20	0	0	0
	ppm			u <1	0	<1
Copper	ppm	ASTM D5185m ASTM D5185m				<1
Tin	ppm		>20	<1	<1	
Vanadium Cadmium	ppm ppm	ASTM D5185m ASTM D5185m		<1 <1	0	<1 0
	ррш		llas hills a sa		-	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	<1	0	7
Calcium	ppm	ASTM D5185m	0	<1	0	0
Phosphorus	ppm	ASTM D5185m	1800	398	423	402
Zinc	ppm	ASTM D5185m	0	0	0	3
Sulfur	ppm	ASTM D5185m	0	59	28	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	9	8	8
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	2	<1	<1
Water	%	ASTM D6304	>.1	<b>A</b> 0.494	<b>0.501</b>	0.049
ppm Water	ppm	ASTM D6304	>1000	<b>4940</b>	<b>6</b> 5010	497.7
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	2404	4571	784
Particles >6µm		ASTM D7647	>1300	625	1249	177
Particles >14µm		ASTM D7647	>160	14	79	6
Particles >21µm		ASTM D7647	>40	3	15	1
		ASTM D7647	>10	0	1	0
Particles >38µm		ASTM D7647	>3	0	0	0
Particles >38µm Particles >71µm		101101041				
•		ISO 4406 (c)	>19/17/14	18/16/11	19/17/13	17/15/10
Particles >71µm	TION			18/16/11 current	19/17/13 history1	17/15/10 history2

Contact/Location: SERVICE MANAGER ? - TYSAMAPRO



(international state) (international state)


of particles (1

40°C1

cSt (


of particles (1 ml)

## **OIL ANALYSIS REPORT**

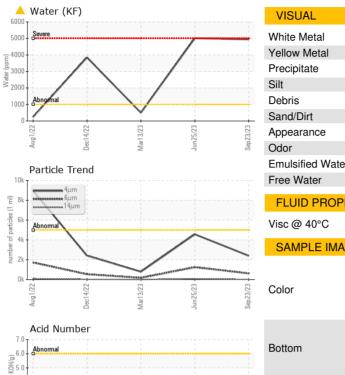





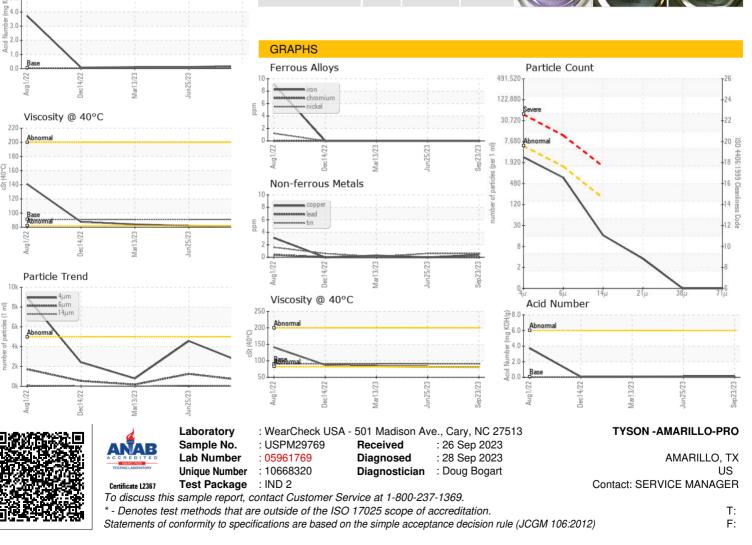

Contact/Location: SERVICE MANAGER ? - TYSAMAPRO