


Area [170697-N2STV4W] HPU @ MAIN FURNACE Component

Hydraulic System

CHEVRON RANDO HD 68 (600 GAL)

COMPONENT CONDITION SUMMARY

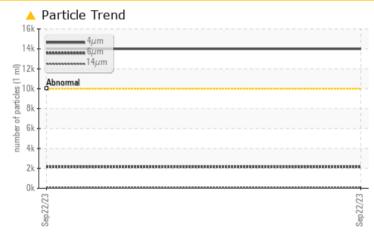

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC T	EST RESULTS				
Sample Status			ATTENTION		
Particles >4µm	ASTM D7647	>10000	<u> </u>		
Particles >6µm	ASTM D7647	>1300	<u> </u>		
Oil Cleanliness	ISO 4406 (c)	>20/17/14	<u> </u>		
PrtFilter				no image	no image


Customer Id: VALJER Sample No.: PH05962214 Lab Number: 05962214 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

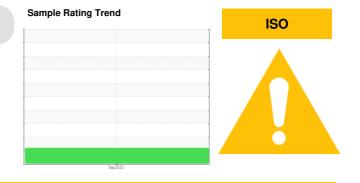

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Area [170697-N2STV4W] Machine Id HPU @ MAIN FURNACE

Hydraulic System Fluid CHEVRON RANDO HD 68 (600 GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Particle Filter (Magn: 200 x)



Sample Rating Trend ISO

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PH05962214		
Sample Date		Client Info		22 Sep 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	4		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	3		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
			IIIIItbase			
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		-		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		18		
Phosphorus	ppm	ASTM D5185m		344		
Zinc	ppm	ASTM D5185m		351		
Sulfur	ppm	ASTM D5185m				
CONTAMINANTS				864		
		method	limit/base	864 current	history1	history2
Silicon	ppm	ASTM D5185m	limit/base >15			
				current	history1	history2
Silicon	ppm	ASTM D5185m		current	history1	history2
Silicon Sodium	ppm ppm ppm	ASTM D5185m ASTM D5185m	>15	current <1 4	history1 	history2
Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	>15 >20	current <1 4 <1	history1 	history2
Silicon Sodium Potassium FLUID CLEANLIN	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647	>15 >20 limit/base	current <1 4 <1 current	history1 history1	history2 history2
Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647	>15 >20 limit/base >10000	current <1 4 <1 current ▲ 14000	history1 history1 	history2 history2
Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647	>15 >20 limit/base >10000 >1300 >160	current <1	history1 history1 	history2 history2
Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >10000 >1300 >160	Current <1 4 <1 Current Current ▲ 14000 ▲ 2138 71	history1 history1	history2 history2
Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >10000 >1300 >160 >40	current <1	history1 history1	history2 history2
Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >10000 >1300 >160 >40 >10	current <1	history1 history1	history2 history2
Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >6µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm ppm ESS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>15 >20 limit/base >10000 >1300 >160 >40 >10 >10	current <1	history1 history1	history2 history2 history2

Report Id: VALJER [WUSCAR] 05962214 (Generated: 09/29/2023 11:16:51) Rev: 1



number of particles (per 1


Î

mher

(B/HOX

St

OIL ANALYSIS REPORT

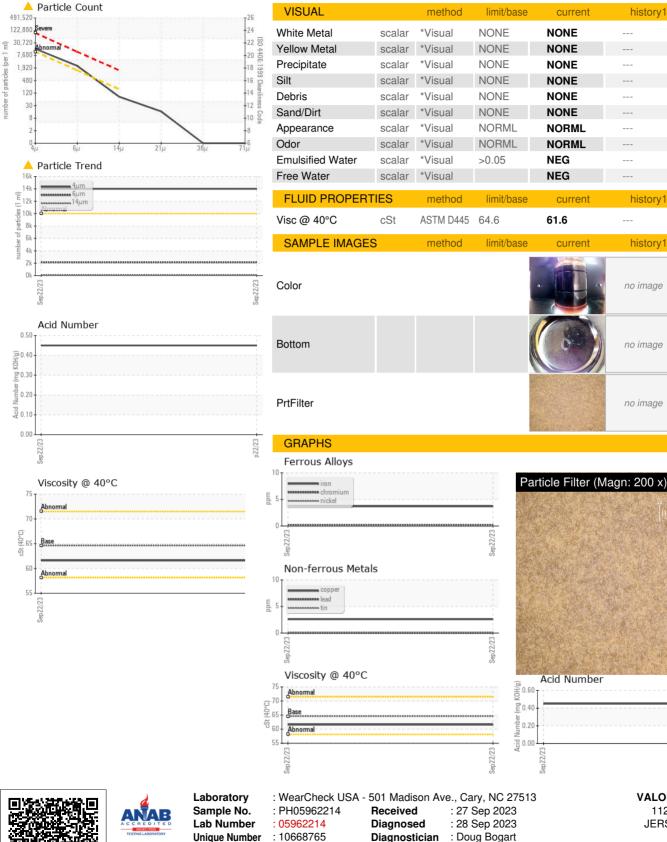

Test Package : PLANT (Additional Tests: PrtFilter)

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

To discuss this sample report, contact Customer Service at 1-800-237-1369.

VALOR RENEWABLES 11250 CHARLES RD JERSEY VILLAGE, TX US 77041 Contact: KERRY WILLIAMS williams@valorrenewables.com T: (281)707-8660 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

Certificate L2367

Contact/Location: KERRY WILLIAMS - VALJER

history2

historv2

history2

no imade

no imade

no image

munipimini