




# PROBLEM SUMMARY

Sample Rating Trend

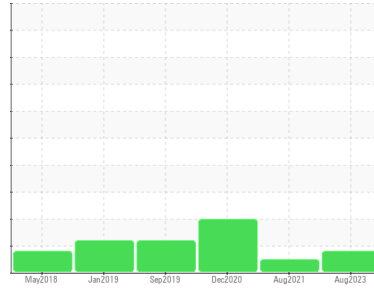


Machine Id  
**KAESER ASD 25T 2273365 (S/N 1539)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

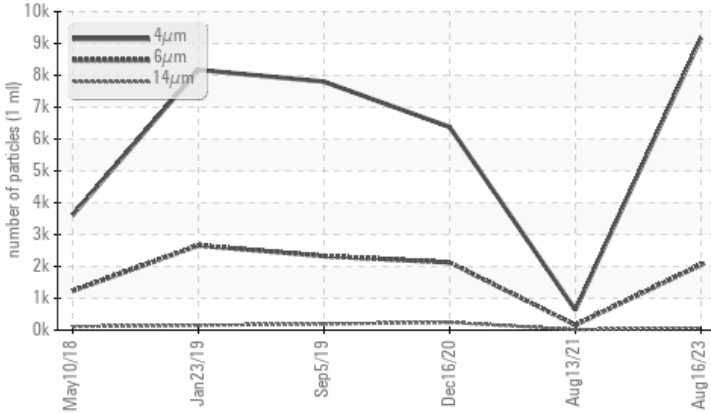

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status		ATTENTION	NORMAL	ABNORMAL
Particles >6µm	ASTM D7647 >1300	▲ 2055	162	▲ 2125
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 20/18/13	15/11	▲ 18/15

Customer Id: REDMEM  
 Sample No.: KCPA006713  
 Lab Number: 05962230  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

### 13 Aug 2021 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 16 Dec 2020 Diag: Jonathan Hester

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 05 Sep 2019 Diag: Angela Borella

ISO



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

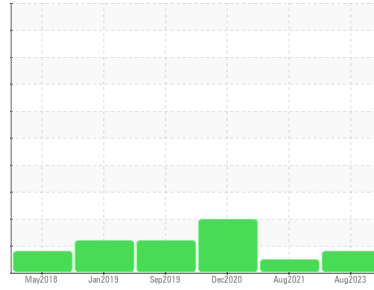

Machine Id  
**KAESER ASD 25T 2273365 (S/N 1539)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA006713</b>	KCP41710	KCP273008
Sample Date	Client Info		<b>16 Aug 2023</b>	13 Aug 2021	16 Dec 2020
Machine Age	hrs	Client Info	<b>45201</b>	43680	42188
Oil Age	hrs	Client Info	<b>0</b>	2838	1346
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>ATTENTION</b>	NORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	0	<1
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>2</b>	4	1
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	<1	0
Barium	ppm	ASTM D5185m 90	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 100	<b>36</b>	14	32
Calcium	ppm	ASTM D5185m 0	<b>3</b>	0	0
Phosphorus	ppm	ASTM D5185m 0	<b>0</b>	3	1
Zinc	ppm	ASTM D5185m 0	<b>11</b>	7	14
Sulfur	ppm	ASTM D5185m 23500	<b>19912</b>	17959	20095

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	2	2
Sodium	ppm	ASTM D5185m	<b>16</b>	4	10
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	2
Water	%	ASTM D6304 >0.05	<b>0.013</b>	0.018	0.011
ppm Water	ppm	ASTM D6304 >500	<b>137.7</b>	189.0	111.5

## FLUID CLEANLINESS


	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>9178</b>	635	6378
Particles >6µm	ASTM D7647 >1300		<b>2055</b>	162	2125
Particles >14µm	ASTM D7647 >80		<b>61</b>	16	244
Particles >21µm	ASTM D7647 >20		<b>8</b>	3	79
Particles >38µm	ASTM D7647 >4		<b>0</b>	0	11
Particles >71µm	ASTM D7647 >3		<b>0</b>	0	4
Oil Cleanliness	ISO 4406 (c) >--/17/13		<b>20/18/13</b>	15/11	18/15

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.39</b>	0.382	0.342


# OIL ANALYSIS REPORT

## ▲ Particle Trend

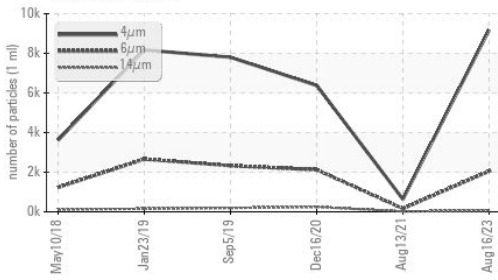

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## Water (KF)

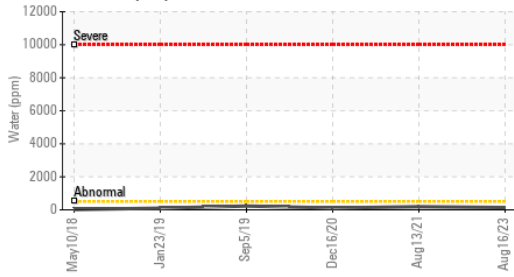


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	44.5	45.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color



Bottom




## Acid Number

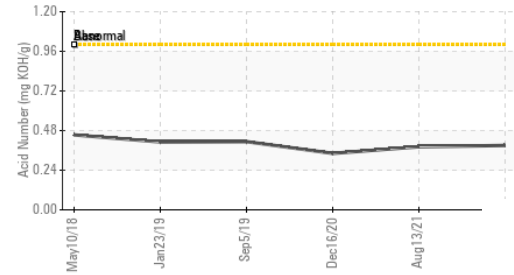


## GRAPHS


### Ferrous Alloys

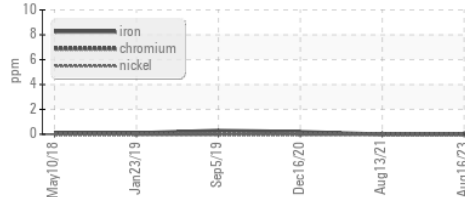


### Non-ferrous Metals

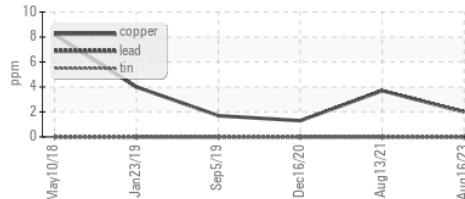


### Viscosity @ 40°C

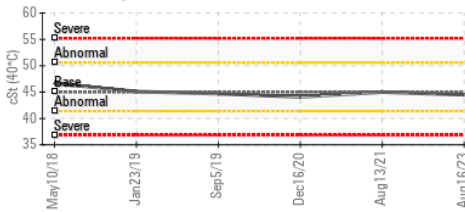

### ▲ Particle Count

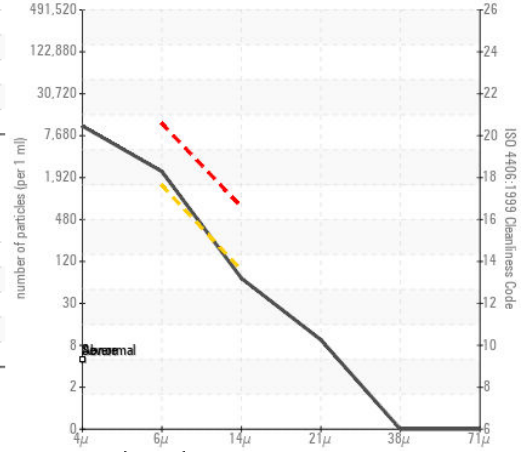

### Acid Number

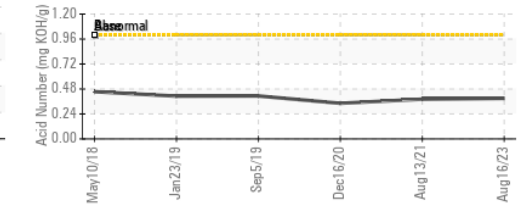

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA006713 **Received** : 27 Sep 2023  
**Lab Number** : 05962230 **Diagnosed** : 28 Sep 2023  
**Unique Number** : 10668781 **Diagnostician** : Don Baldrige

**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**RED DOT**  
 3961 OUTLAND RD  
 MEMPHIS, TN  
 US 38118  
 Contact: Service Manager

T:  
F: