


# **OIL ANALYSIS REPORT**

# S-460 [6431] Machine Id KAESER 1810936 - SPORTS AWARDS

Component

Compressor





#### DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

There is no indication of any contamination in the oil.


## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Aug2021	Sep2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		UCH05962330	UCH05342722	
Sample Date		Client Info		08 Sep 2023	25 Aug 2021	
Machine Age	hrs	Client Info		72064	62934	
Oil Age	hrs	Client Info		4174	4819	
Oil Changed		Client Info		Changed	Changed	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	2	<1	
Lead	ppm	ASTM D5185m	>10	0	<1	
Copper	ppm	ASTM D5185m	>50	4	3	
Tin	ppm	ASTM D5185m	>10	<1	0	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	
Barium	ppm	ASTM D5185m	90	0	2	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	90	53	40	
Calcium	ppm	ASTM D5185m		0	0	
Phosphorus	ppm	ASTM D5185m	_	0	5	
Zinc	ppm	ASTM D5185m		0	0	
Sulfur	ppm	ASTM D5185m		18840	16564	
			li-nai+/la-nan			
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm					
Sodium		ASTM D5185m	>25	0	1	
	ppm	ASTM D5185m		15	4	
	ppm ppm	ASTM D5185m ASTM D5185m	>20	15 <1	4 <1	
Potassium  FLUID DEGRADA	ppm ppm ATION	ASTM D5185m ASTM D5185m method		15 <1 current	4	
FLUID DEGRADA Acid Number (AN)	ppm ppm	ASTM D5185m ASTM D5185m	>20	15 <1	4 <1	
FLUID DEGRADA	ppm ppm ATION	ASTM D5185m ASTM D5185m method	>20 limit/base	15 <1 current 0.37 current	4 <1 history1	
FLUID DEGRADA Acid Number (AN) VISUAL	ppm ppm ATION	ASTM D5185m ASTM D5185m method ASTM D8045	>20 limit/base 0.4	15 <1 current 0.37	4 <1 history1 0.353	history2
FLUID DEGRADA Acid Number (AN) VISUAL White Metal	ppm ppm ATION mg KOH/g	ASTM D5185m ASTM D5185m method ASTM D8045 method	>20 limit/base 0.4 limit/base	15 <1 current 0.37 current	4 <1 history1 0.353 history1	history2
FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal	ppm ppm ATION mg KOH/g	ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual	>20 limit/base 0.4 limit/base NONE	15 <1 current 0.37 current NONE	4 <1 history1 0.353 history1 NONE	history2 history2
FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate	ppm ppm ATION mg KOH/g scalar scalar	ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual	>20 limit/base 0.4 limit/base NONE NONE	15 <1 current 0.37 current NONE	4 <1 history1 0.353 history1 NONE NONE	history2 history2
FLUID DEGRADA Acid Number (AN)  VISUAL  White Metal Yellow Metal Precipitate Silt	ppm ppm ATION mg KOH/g scalar scalar scalar	ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual *Visual	>20 limit/base 0.4 limit/base NONE NONE NONE	15 <1 current 0.37 current NONE NONE NONE	4 <1 history1 0.353 history1 NONE NONE NONE	history2 history2
FLUID DEGRADA Acid Number (AN)  VISUAL  White Metal Yellow Metal Precipitate Silt Debris	ppm ppm ATION mg KOH/g scalar scalar scalar scalar	ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual *Visual *Visual	>20 limit/base 0.4 limit/base NONE NONE NONE NONE	15 <1 current 0.37 current NONE NONE NONE NONE NONE	4 <1 history1 0.353 history1 NONE NONE NONE NONE	history2 history2
FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt	ppm ppm ATION mg KOH/g scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual *Visual *Visual *Visual *Visual *Visual	>20 limit/base 0.4 limit/base NONE NONE NONE NONE NONE NONE	15 <1 current 0.37 current NONE NONE NONE NONE NONE NONE NONE	4 <1 history1 0.353 history1 NONE NONE NONE NONE VUITE	history2 history2
FLUID DEGRADA Acid Number (AN)	ppm ppm ATION mg KOH/g scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual *Visual *Visual *Visual *Visual *Visual *Visual *Visual	>20 limit/base 0.4 limit/base NONE NONE NONE NONE NONE NONE NONE NON	15 <1 current 0.37 current NONE NONE NONE NONE NONE NONE NONE NON	history1 0.353 history1 NONE NONE NONE NONE VLITE NONE	history2 history2
FLUID DEGRADA Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance	ppm ppm ATION mg KOH/g scalar scalar scalar scalar scalar scalar scalar scalar	ASTM D5185m ASTM D5185m method ASTM D8045 method *Visual	>20 limit/base 0.4 limit/base NONE NONE NONE NONE NONE NONE NONE NON	15 <1 current 0.37 current NONE NONE NONE NONE NONE NONE NONE NON	history1 0.353 history1 NONE NONE NONE NONE VLITE NONE NONE NORML	history2 history2



## **OIL ANALYSIS REPORT**

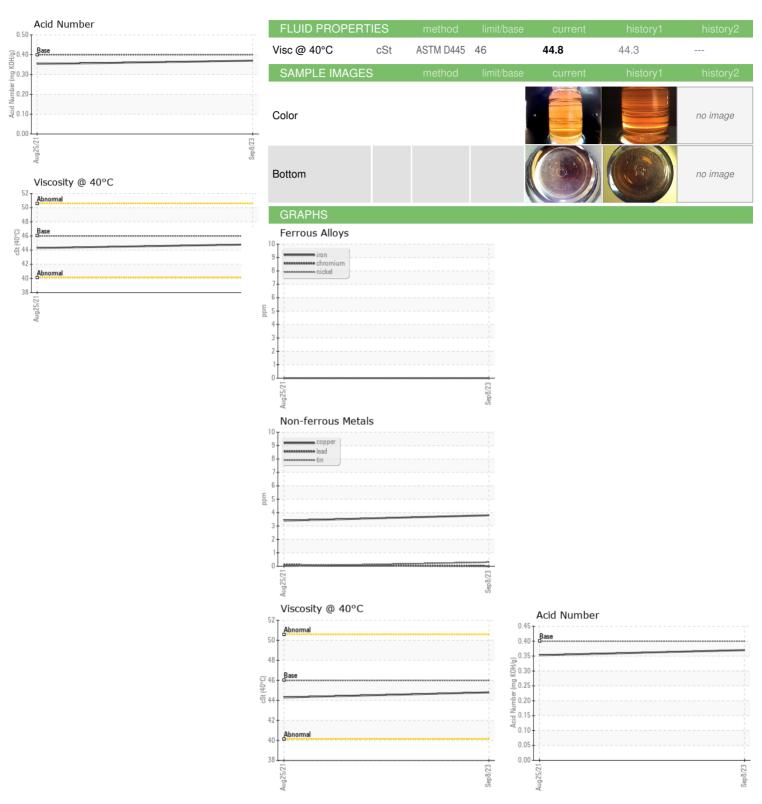





Laboratory Sample No. Lab Number

: UCH05962330 : 05962330 Unique Number : 10668881 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 27 Sep 2023

: 28 Sep 2023 Diagnosed Diagnostician : Don Baldridge **DELTA INDUSTRIES - DOWNERS GROVE** 2201 CURTISS STREET

DOWNERS GROVE, IL US 60515

Contact: MICHAEL FERRIS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (630)960-3931