




# OIL ANALYSIS REPORT

Sample Rating Trend

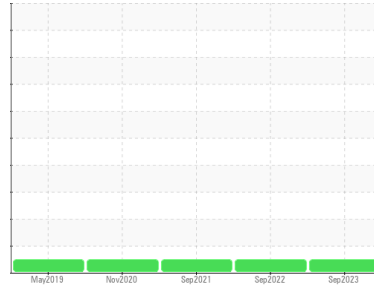

**NORMAL**



Machine Id  
**SUTPHEN LADDER-801**  
 Component  
**Hydraulic System**  
 Fluid  
**DEXRON III (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0843869</b>	WC0724194	WC0609536
Sample Date	Client Info		<b>06 Sep 2023</b>	01 Sep 2022	27 Sep 2021
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>4</b>	4	<1
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >10	<b>1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >10	<b>1</b>	2	<1
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >75	<b>19</b>	17	8
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>84</b>	81	31
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m	<b>3</b>	3	<1
Calcium	ppm	ASTM D5185m	<b>91</b>	88	13
Phosphorus	ppm	ASTM D5185m	<b>217</b>	213	164
Zinc	ppm	ASTM D5185m	<b>25</b>	22	67
Sulfur	ppm	ASTM D5185m	<b>815</b>	912	1121

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>6</b>	5	2
Sodium	ppm	ASTM D5185m	<b>2</b>	3	4
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	3

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	VLITE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG






# OIL ANALYSIS REPORT

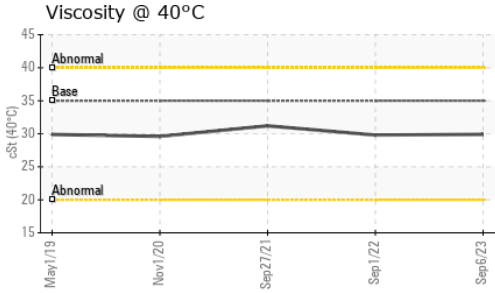

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	35.0	<b>29.9</b>	29.8	31.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

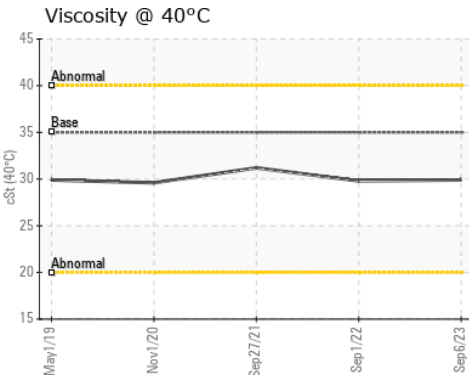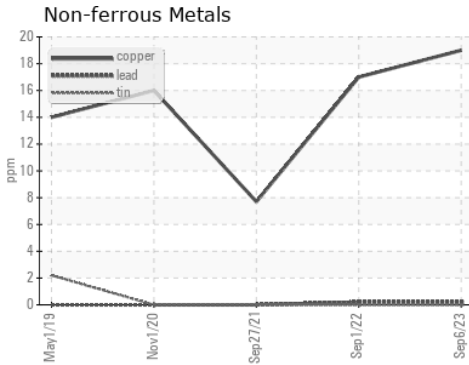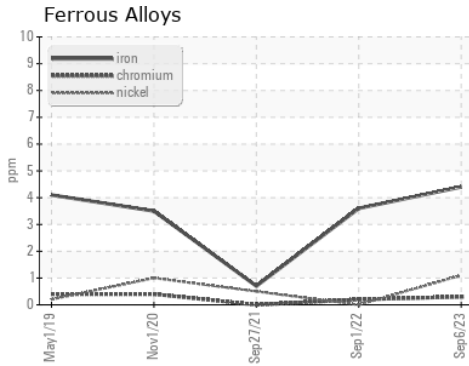

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0843869      **Received** : 27 Sep 2023  
**Lab Number** : **05962599**      **Diagnosed** : 28 Sep 2023  
**Unique Number** : 10669150      **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**WEST MONROE FIRE DISTRICT**  
 4341 CYPRESS ST  
 WEST MONROE, LA  
 US 71291  
 Contact: GARY THOMAS  
 gthomas@westmonroe.la.gov  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)