

OIL ANALYSIS REPORT

Area [2941891] 61SK207 (S/N J0220-04307)

Component Pump Hydraulic System

PANOLIN ORCON HYD 37130 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Sep2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0792609		
Sample Date		Client Info		21 Sep 2023		
Machine Age	yrs	Client Info		1		
Oil Age	yrs	Client Info		1		
Oil Changed	910	Client Info		Filtered		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>30	0		
Chromium	ppm	ASTM D5185m		0		
Nickel	ppm	ASTM D5185m	>2	0		
Titanium	ppm	ASTM D5185m	~_	<1		
Silver		ASTM D5185m		0		
Aluminum	ppm ppm	ASTM D5185m	>2	0		
Lead			>2 >10	0		
	ppm	ASTM D5185m		-		
Copper	ppm	ASTM D5185m		<1		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		6		
Phosphorus	ppm	ASTM D5185m		512		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		727		
CONTAMINANTS	\$	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.008		
ppm Water	ppm	ASTM D6304	>500	80.4		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	381		
Particles >6µm		ASTM D7647	>1300	73		
Particles >14µm		ASTM D7647	>160	5		
Particles >21µm		ASTM D7647	>40	1		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/13/10		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.57		







OIL ANALYSIS REPORT

scalar

scalar

scalar

scalar

scalar

scalar

scalar

scalar

cSt

*Visual

*Visual

*Visua

*Visual

*Visual

*Visual

*Visual

*Visual

ASTM D445

scalar *Visual

scalar *Visual

NONE

White Metal

Yellow Metal

Precipitate

Silt

Debris

Odor

Sand/Dirt

Appearance


Free Water

Visc @ 40°C


Emulsified Water


FLUID PROPERTIES

SAMPLE IMAGES






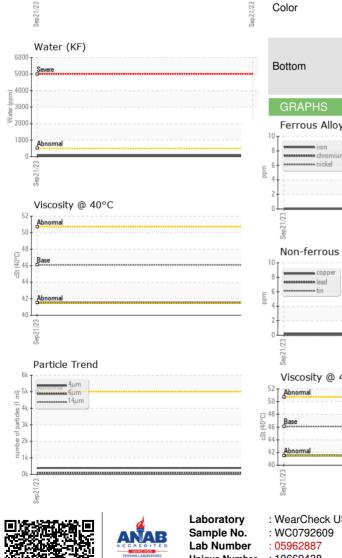

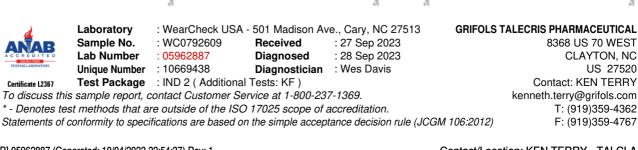



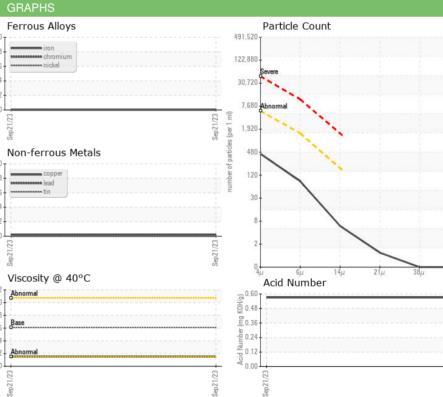

F: (919)359-4767

8368 US 70 WEST

CLAYTON, NC

T: (919)359-4362

US 27520

4406

:1999 Cle

14