

OIL ANALYSIS REPORT

Sample Rating Trend





Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

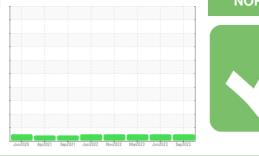



SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC78807	KC101157	KC96518
Sample Date		Client Info		12 Sep 2023	28 Jun 2023	09 Mar 2023
Machine Age	hrs	Client Info		34758	32996	30607
Oil Age	hrs	Client Info		7022	7022	4633
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m		19	17	15
Tin	ppm		>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	1-1-	method	limit/base	current	history1	history2
Boron		ASTM D5185m	111100000		0	0
	ppm		00	0		
Barium	ppm	ASTM D5185m	90	-	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m	00	<1	0	0
Magnesium	ppm	ASTM D5185m	90	0	0	0
Calcium	ppm	ASTM D5185m	2	0	0	0
Dha an hanna		AOTH DEADE			0	4
Phosphorus	ppm	ASTM D5185m		2	0	<1
Zinc	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m method	limit/base	0 current	0 history1	0 history2
Zinc CONTAMINANTS Silicon	ppm ppm	ASTM D5185m method ASTM D5185m	limit/base >25	0 current <1	0 history1 <1	0 history2 <1
Zinc CONTAMINANTS Silicon Sodium	ppm	ASTM D5185m method ASTM D5185m ASTM D5185m	>25	0 current <1 <1	0 history1 <1 0	0 history2 <1 0
Zinc CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	0 current <1 <1 0	0 history1 <1 0 1	0 history2 <1 0 <1
Zinc CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	0 current <1 <1 0 0 0.001	0 history1 <1 0 1 0.004	0 history2 <1 0 <1 0.006
Zinc CONTAMINANTS Silicon Sodium Potassium Water ppm Water	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	0 current <1 <1 0	0 history1 <1 0 1	0 history2 <1 0 <1
Zinc CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	0 current <1 <1 0 0 0.001	0 history1 <1 0 1 0.004	0 history2 <1 0 <1 0.006
Zinc CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647	>25 >20 >0.05 >500 limit/base	0 current <1 <1 0 0.001 6.9 current 3812	0 history1 <1 0 1 0.004 40.3 history1 455	0 history2 <1 0 <1 0.006 66.1 history2 2622
Zinc CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304	>25 >20 >0.05 >500 limit/base	0 current <1 <1 0 0.001 6.9 current	0 history1 <1 0 1 0.004 40.3 history1	0 history2 <1 0 <1 0.006 66.1 history2
Zinc CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647	>25 >20 >0.05 >500 limit/base	0 current <1 <1 0 0.001 6.9 current 3812	0 history1 <1 0 1 0.004 40.3 history1 455	0 history2 <1 0 <1 0.006 66.1 history2 2622
Zinc CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	0 current <1 <1 0 0.001 6.9 current 3812 43	0 history1 <1 0 1 0.004 40.3 history1 455 213	0 history2 <1 0 <1 0.006 66.1 history2 2622 437
Zinc CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm % ppm	ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	0 current <1 <1 0 0.001 6.9 current 3812 43 4 1 0	0 history1 <1 0 1 0.004 40.3 history1 455 213 4	0 history2 <1 0 <1 0.006 66.1 history2 2622 437 8
Zinc CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm % ppm	ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	0 current <1 <1 0 0.001 6.9 current 3812 43 4 1	0 history1 <1 0 1 0.004 40.3 history1 455 213 4 0	0 history2 <1 0 <1 0.006 66.1 history2 2622 437 8 2
Zinc CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm	ppm ppm ppm ppm % ppm	ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	0 current <1 <1 0 0.001 6.9 current 3812 43 4 1 0	0 history1 <1 0 1 0.004 40.3 history1 455 213 4 0 0 0	0 history2 <1 0 <1 0.006 66.1 history2 2622 437 8 2 2 2 2 2 2 0
Zinc CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm ppm % ppm ESS	ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	0 current <1 <1 0 0.001 6.9 current 3812 43 4 1 0 0 0	0 history1 <1 0 1 0.004 40.3 history1 455 213 4 0 0 0 0	0 history2 <1 0 <1 0.006 66.1 history2 2622 437 8 2 2622 437 8 2 0 0




Built for a lifetime.


OIL ANALYSIS REPORT

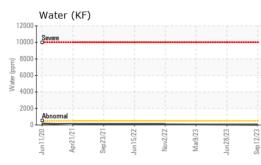

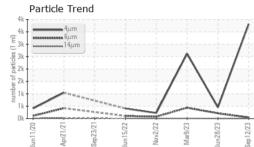


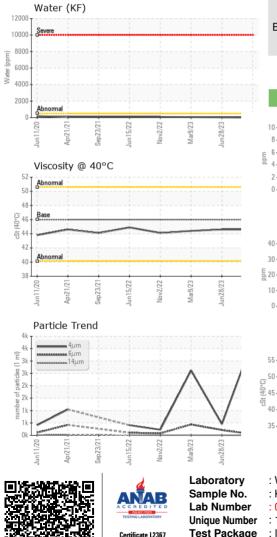

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.6	44.6	44.4
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color						



Bottom

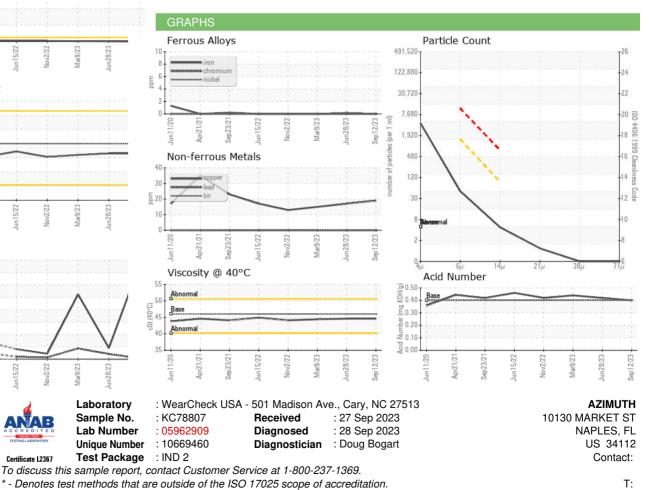

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ? ? - AZINAP

Page 2 of 2