




# OIL ANALYSIS REPORT

Sample Rating Trend

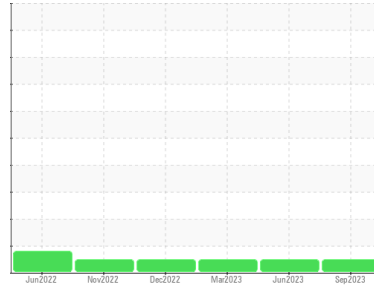

**NORMAL**



Machine Id  
**KAESER ASD 40T 8079964 (S/N 1258)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KC104595</b>	KC101155	KC99026
Sample Date	Client Info	<b>13 Sep 2023</b>	28 Jun 2023	09 Mar 2023
Machine Age	hrs	<b>11781</b>	10006	7397
Oil Age	hrs	<b>993</b>	2609	2994
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

**WEAR METALS**

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >50	<b>0</b>	<1	0
Chromium ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel ppm	ASTM D5185m >3	<b>0</b>	<1	0
Titanium ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Silver ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum ppm	ASTM D5185m >10	<b>0</b>	0	0
Lead ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper ppm	ASTM D5185m >50	<b>19</b>	18	19
Tin ppm	ASTM D5185m >10	<b>0</b>	0	0
Vanadium ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium ppm	ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	<b>0</b>	0	0
Barium ppm	ASTM D5185m 90	<b>0</b>	0	0
Molybdenum ppm	ASTM D5185m	<b>0</b>	<1	<1
Manganese ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Magnesium ppm	ASTM D5185m 90	<b>0</b>	0	0
Calcium ppm	ASTM D5185m 2	<b>0</b>	0	0
Phosphorus ppm	ASTM D5185m	<b>1</b>	0	<1
Zinc ppm	ASTM D5185m	<b>0</b>	0	0

**CONTAMINANTS**

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	<b>&lt;1</b>	0	<1
Sodium ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Potassium ppm	ASTM D5185m >20	<b>0</b>	1	0
Water %	ASTM D6304 >0.05	<b>0.002</b>	0.004	0.005
ppm Water	ASTM D6304 >500	<b>24.6</b>	40.4	59.3






**FLUID CLEANLINESS**

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	<b>197</b>	111	375
Particles >6µm	ASTM D7647 >1300	<b>52</b>	54	108
Particles >14µm	ASTM D7647 >80	<b>4</b>	5	11
Particles >21µm	ASTM D7647 >20	<b>2</b>	0	3
Particles >38µm	ASTM D7647 >4	<b>1</b>	0	0
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13	<b>15/13/9</b>	14/13/10	16/14/11

**FLUID DEGRADATION**

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045 0.4	<b>0.39</b>	0.43	0.42


# OIL ANALYSIS REPORT

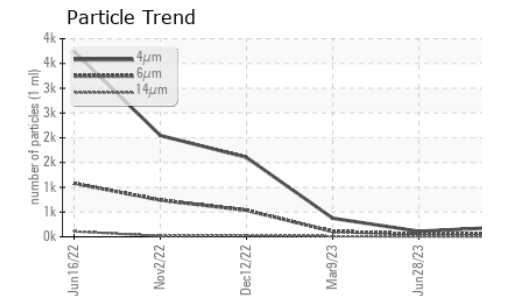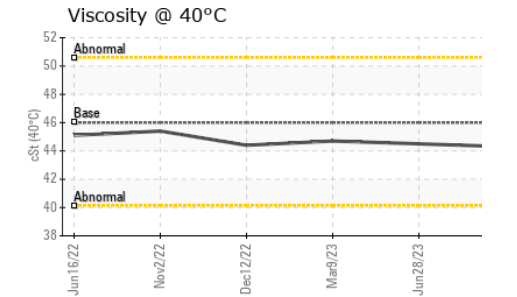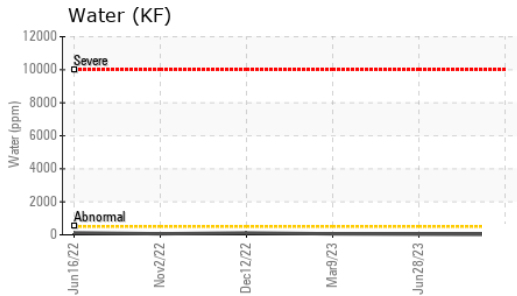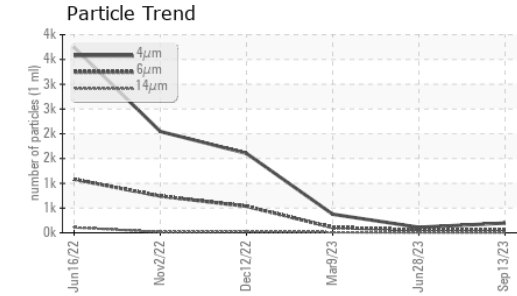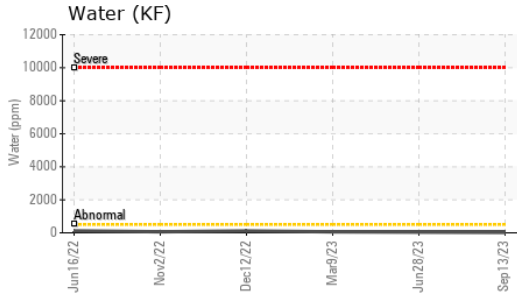






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.3	44.5	44.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

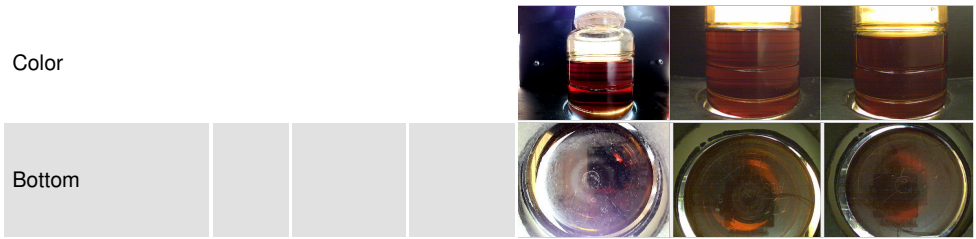

## GRAPHS

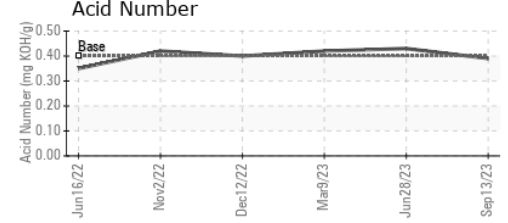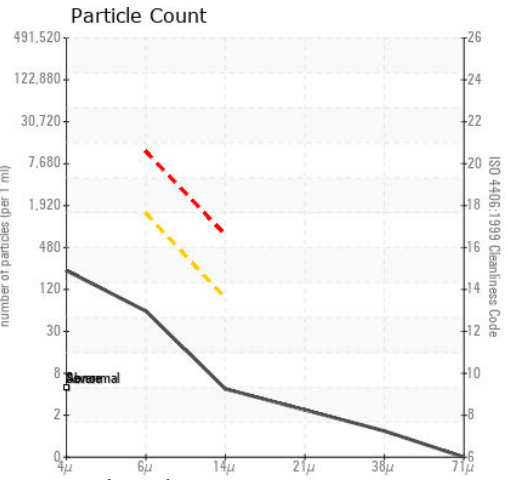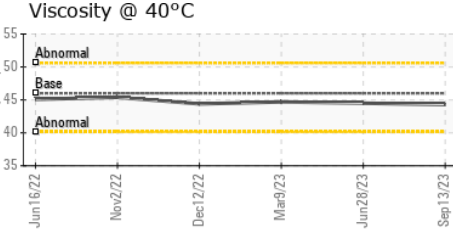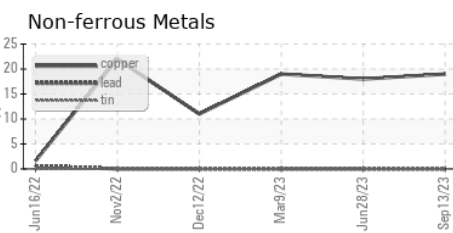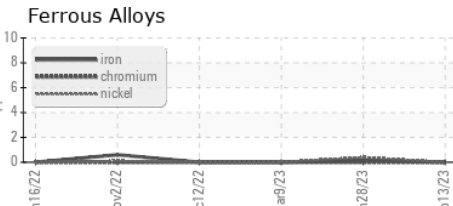

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC104595 **Received** : 27 Sep 2023  
**Lab Number** : 05962912 **Diagnosed** : 28 Sep 2023  
**Unique Number** : 10669463 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**AZIMUTH**  
 10130 MARKET ST  
 NAPLES, FL  
 US 34112  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: