

# **OIL ANALYSIS REPORT**

## Area **80 XP ATLAS COPCO API311956 - AMERICAN TRUETZSCHLER** Component

Compressor

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Rating Trend




|                  |          |             | 0ct2022    | Aug2023     |             |           |
|------------------|----------|-------------|------------|-------------|-------------|-----------|
| SAMPLE INFORM    | MATION   | method      |            |             |             | history2  |
| Sample Number    |          | Client Info |            | UCH05962968 | UCH05682909 |           |
| Sample Date      |          | Client Info |            | 22 Aug 2023 | 12 Oct 2022 |           |
| Machine Age      | hrs      | Client Info |            | 64933       | 62929       |           |
| Oil Age          | hrs      | Client Info |            | 2004        | 7929        |           |
| Oil Changed      |          | Client Info |            | N/A         | N/A         |           |
| Sample Status    |          |             |            | NORMAL      | NORMAL      |           |
| WEAR METALS      |          | method      | limit/base | current     | history1    | history2  |
|                  | 0.0.00   | ASTM D5185m |            |             |             | THISTORYZ |
| Iron             | ppm      |             | >50        | 0           | 0           |           |
| Chromium         | ppm      | ASTM D5185m | >5         | 0           | 0           |           |
| Nickel           | ppm      | ASTM D5185m |            | 0           | 0           |           |
| Titanium         | ppm      | ASTM D5185m |            | 0           | 0           |           |
| Silver           | ppm      | ASTM D5185m |            | 0           | 0           |           |
| Aluminum         | ppm      | ASTM D5185m | >15        | <1          | 0           |           |
| Lead             | ppm      | ASTM D5185m | >65        | 0           | 0           |           |
| Copper           | ppm      | ASTM D5185m | >65        | 0           | 0           |           |
| Tin              | ppm      | ASTM D5185m | >10        | 0           | 0           |           |
| Vanadium         | ppm      | ASTM D5185m |            | 0           | 0           |           |
| Cadmium          | ppm      | ASTM D5185m |            | 0           | 0           |           |
| ADDITIVES        |          | method      | limit/base | current     | history1    | history2  |
| Boron            | ppm      | ASTM D5185m |            | 0           | 0           |           |
| Barium           | ppm      | ASTM D5185m |            | 0           | 0           |           |
| Molybdenum       | ppm      | ASTM D5185m |            | 0           | 0           |           |
| Manganese        | ppm      | ASTM D5185m |            | 0           | <1          |           |
| Magnesium        | ppm      | ASTM D5185m |            | 0           | <1          |           |
| Calcium          | ppm      | ASTM D5185m |            | 0           | 0           |           |
| Phosphorus       | ppm      | ASTM D5185m |            | 170         | 129         |           |
| Zinc             | ppm      | ASTM D5185m |            | 15          | 35          |           |
| Sulfur           | ppm      | ASTM D5185m |            | 0           | 0           |           |
| CONTAMINANTS     | 3        | method      | limit/base | current     | history1    | history2  |
| Silicon          | ppm      | ASTM D5185m | >35        | <1          | <1          |           |
| Sodium           | ppm      | ASTM D5185m |            | 3           | 4           |           |
| Potassium        | ppm      | ASTM D5185m | >20        | 0           | <1          |           |
| FLUID DEGRADA    | ATION    | method      | limit/base | current     | history1    | history2  |
| Acid Number (AN) | mg KOH/g | ASTM D8045  |            | 0.22        | 0.41        |           |
| VISUAL           |          | method      | limit/base | current     | history1    | history2  |
| White Metal      | scalar   | *Visual     | NONE       | NONE        | NONE        |           |
| Yellow Metal     | scalar   | *Visual     | NONE       | NONE        | NONE        |           |
| Precipitate      | scalar   | *Visual     | NONE       | NONE        | NONE        |           |
| Silt             | scalar   | *Visual     | NONE       | NONE        | NONE        |           |
| Debris           | scalar   | *Visual     | NONE       | NONE        | NONE        |           |
| Sand/Dirt        | scalar   | *Visual     | NONE       | NONE        | NONE        |           |
| Appearance       | scalar   | *Visual     | NORML      | NORML       | NORML       |           |
| Odor             | scalar   | *Visual     | NORML      | NORML       | NORML       |           |
| Emulsified Water | scalar   | *Visual     | >0.1       | NEG         | NEG         |           |
| Free Water       | scalar   | *Visual     |            | NEG         | NEG         |           |
|                  |          |             |            |             |             |           |

Contact/Location: SCOTT KEE - UCLEWCHA



# **OIL ANALYSIS REPORT**

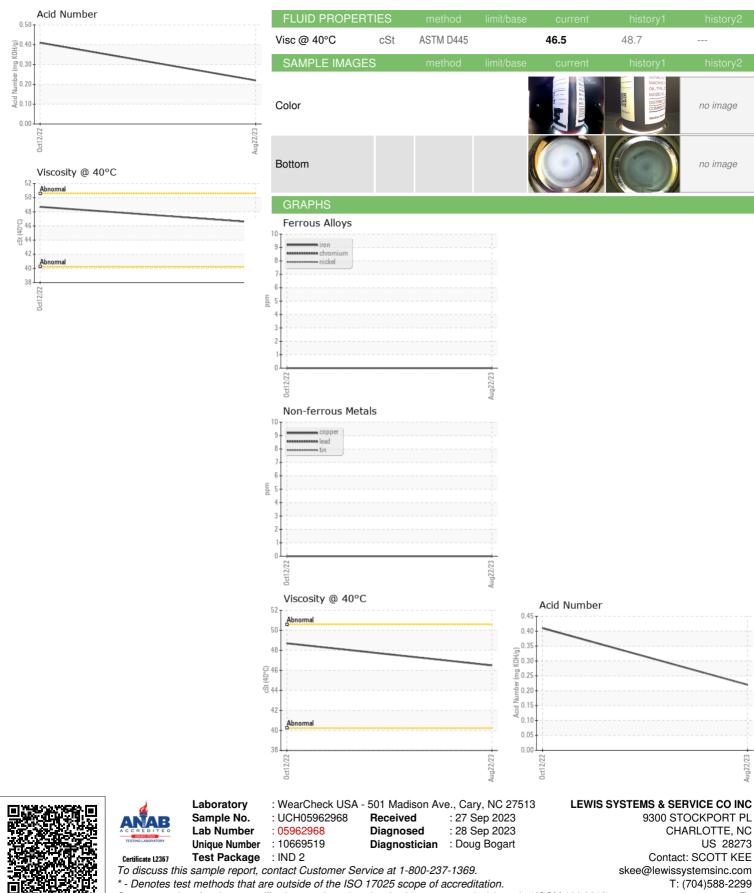

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: SCOTT KEE - UCLEWCHA

US 28273

F:

no image

no image