


PROBLEM SUMMARY

ARBURG ARBURG ALL ROUNDER 370C 88 TON MOLDER

Hydraulic System

MOCA AO-1 R & O AW ISO 46 (65 GAL)

COMPONENT CONDITION SUMMARY

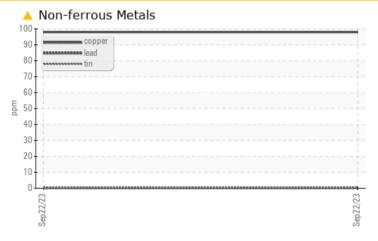

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS										
Sample Status				ABNORMAL						
Copper	ppm	ASTM D5185m	>20	<u> </u>						

Customer Id: MINBET Sample No.: BRI004436 Lab Number: 05963159 Test Package: IND 1



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com



There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

ARBURG ARBURG ALL ROUNDER 370C 88 TON MOLDER

Hydraulic System

MOCA AO-1 R & O AW ISO 46 (65 GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

🔺 Wear

The copper level is abnormal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

				Sep 2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		BRI004436		
Sample Date		Client Info		22 Sep 2023		
Machine Age	hrs	Client Info		1923		
Oil Age	hrs	Client Info		0		
Oil Changed	1110	Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	<u>∧</u> 98		
Tin	ppm	ASTM D5185m	>20	<1		
Vanadium	ppm	ASTM D5185m	20	0		
Cadmium	ppm	ASTM D5185m		0		
	ppin					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		2		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		3		
Calcium	ppm	ASTM D5185m		432		
Phosphorus	ppm	ASTM D5185m		357		
Zinc	ppm	ASTM D5185m		432		
Sulfur	ppm	ASTM D5185m		1966		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	5		
Sodium	ppm	ASTM D5185m		7		
Potassium	ppm	ASTM D5185m	>20	2		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	FIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		45.4		
·18:22) Pov: 1	001	ACTIVI D440			otion: IANAIE NA	


Sample Rating Trend

WEAR

Contact/Location: JAMIE MILLER - MINBET



OIL ANALYSIS REPORT

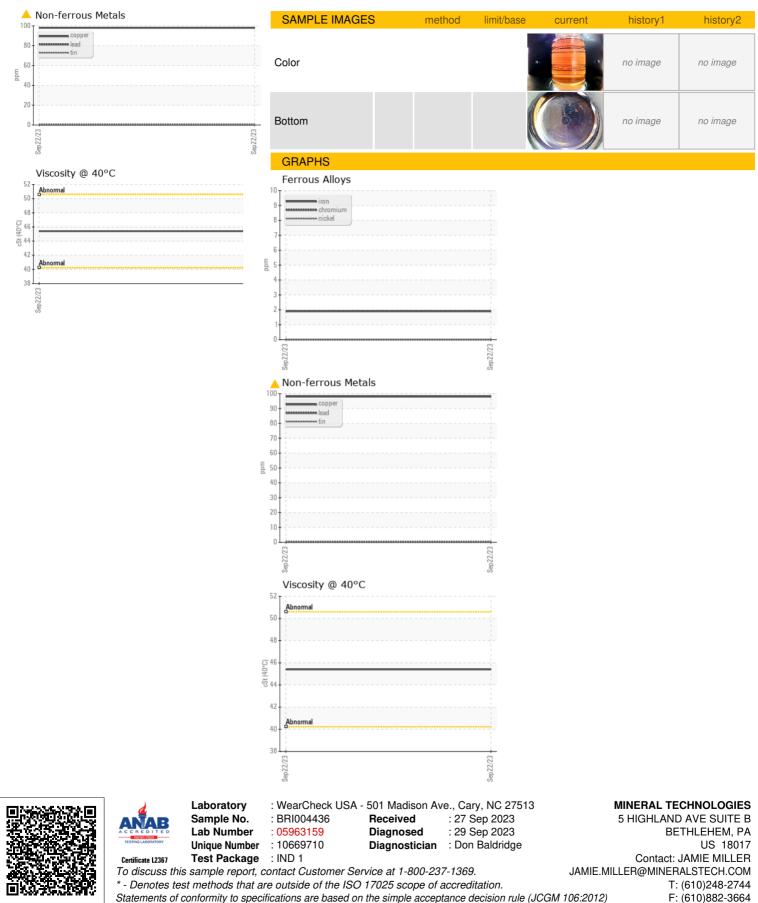

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: JAMIE MILLER - MINBET