




Area
Ascendum Machinery
 Machine Id
VOLVO L180H 14 (S/N 5269)
 Component
Diesel Engine
 Fluid
VOLVO VDS-4.5 Premium Motor Oil 15W40 (--- GAL)

Sample Rating Trend

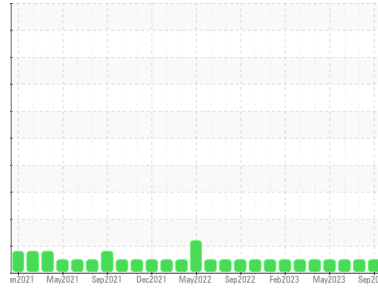

NORMAL

DIAGNOSIS

- Recommendation**
 Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 There is no indication of any contamination in the oil.
- Fluid Condition**
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ASC0000726	ASC0000333	ASC0000199
Sample Date	Client Info		25 Sep 2023	31 Jul 2023	15 Jun 2023
Machine Age	hrs	Client Info	13007	12512	12056
Oil Age	hrs	Client Info	495	456	551
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	2	2	2
Chromium	ppm	ASTM D5185m >10	0	0	<1
Nickel	ppm	ASTM D5185m >10	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >10	<1	<1	2
Lead	ppm	ASTM D5185m >20	<1	<1	0
Copper	ppm	ASTM D5185m >15	<1	<1	<1
Tin	ppm	ASTM D5185m >10	0	0	<1
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	40	40	33
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	42	38	38
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m	501	481	506
Calcium	ppm	ASTM D5185m	1757	1627	1670
Phosphorus	ppm	ASTM D5185m	940	874	910
Zinc	ppm	ASTM D5185m	1171	1067	1154
Sulfur	ppm	ASTM D5185m	3141	3171	3595

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	3	3	3
Sodium	ppm	ASTM D5185m	2	2	2
Potassium	ppm	ASTM D5185m >20	<1	0	2



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	6.9	6.6	7.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.5	21.4	22.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.1	19.4	20.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.3	10.1









OIL ANALYSIS REPORT

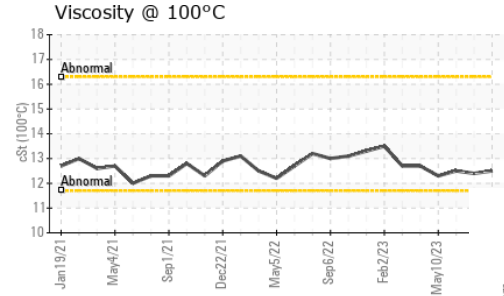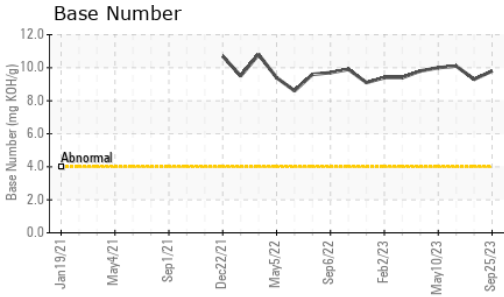

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.5	12.4	12.5

GRAPHS

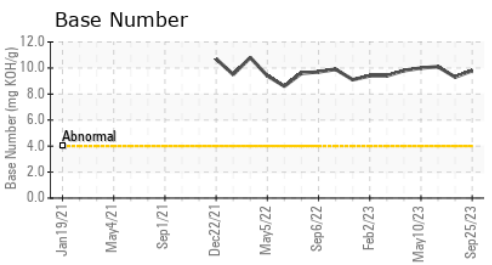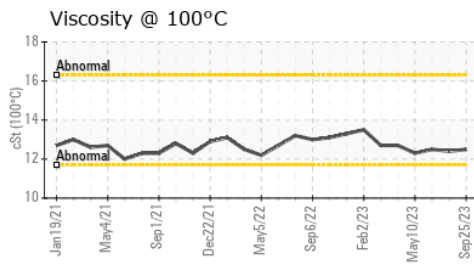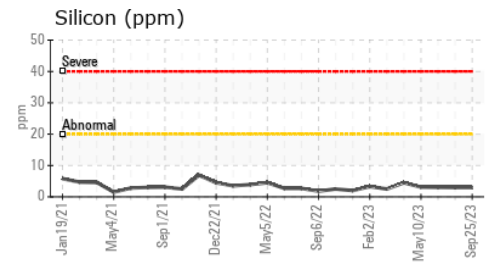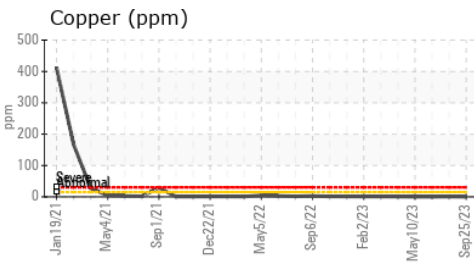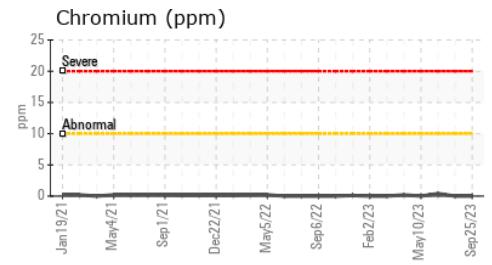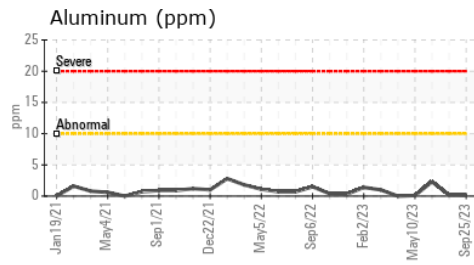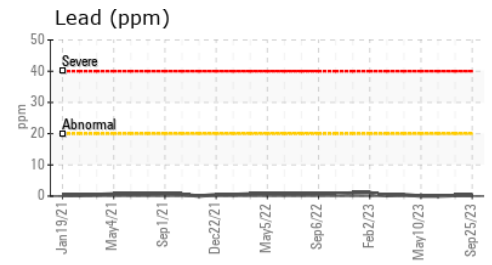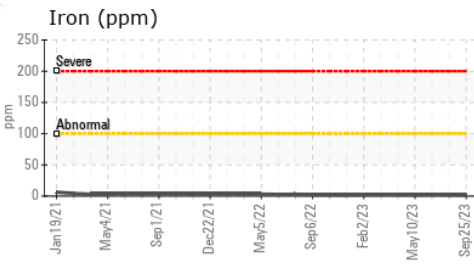

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0000726 **Received** : 28 Sep 2023
Lab Number : 05963203 **Diagnosed** : 29 Sep 2023
Unique Number : 10669754 **Diagnostician** : Wes Davis
Test Package : MOBCE (Additional Tests: TBN)

EGGER WOOD PRODUCTS
 300 EGGER PARKWAY
 LINWOOD, NC
 US 27299
 Contact: HELMUT THOMAY
 helmut.thomay@egger.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)