

# **PROBLEM SUMMARY**

### Sample Rating Trend

FUEL


FUEL


Machine Id **9907** Component

**Diesel Engine** 

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)** 

#### **COMPONENT CONDITION SUMMARY**

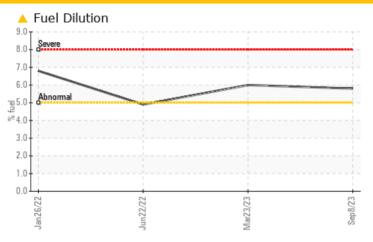

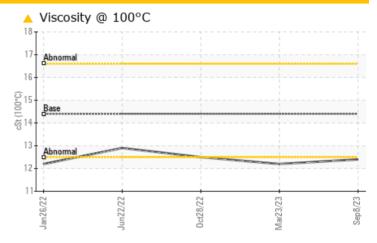

#### RECOMMENDATION

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC	TEST R	ESULTS				
Sample Status				ABNORMAL	ABNORMAL	NORMAL
Fuel	%	ASTM D3524	>5	<b>△</b> 5.8	<b>△</b> 6.0	<1.0
Visc @ 100°C	cSt	ASTM DAAS	1//	<b>▲ 12</b> /	A 100	12.5

Customer Id: TOWCHANC Sample No.: WC0844988 Lab Number: 05963296 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Wes Davis +1 905-569-8600 x223 wesd@wearcheck.ca

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

#### **RECOMMENDED ACTIONS**

Action	Status	Date	Done By	Description
Resample			?	We recommend an early resample to monitor this condition.
Information Required			?	Please specify the brand, type, and viscosity of the oil on your next sample.  Please specify the component make and model with your next sample.

#### HISTORICAL DIAGNOSIS

#### 23 Mar 2023 Diag: Wes Davis

FUEL



The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.



#### 28 Oct 2022 Diag: Don Baldridge

NORMAL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.



#### 22 Jun 2022 Diag: Jonathan Hester

FUEL




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. Light fuel dilution occurring. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

Sample Rating Trend







Machine Id 9907 Component

**Diesel Engine** 

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)** 

### **DIAGNOSIS**

#### Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

#### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

		Jan 2022	Jun2022	Oct2022 Mar2023	Sep2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0844988	WC0790530	WC0744297
Sample Date		Client Info		08 Sep 2023	23 Mar 2023	28 Oct 2022
Machine Age	mls	Client Info		360242	354801	349322
Oil Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
CONTAMINATIO	V	method	limit/base	current	history1	history2
Glycol		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	13	14	12
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	1
Silver	ppm	ASTM D5185m	>3	0	0	2
Aluminum	ppm	ASTM D5185m	>20	2	0	2
Lead	ppm	ASTM D5185m	>40	16	17	19
Copper	ppm	ASTM D5185m	>330	3	3	3
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	18	18	16
	ppm ppm	ASTM D5185m ASTM D5185m	250 10	18 2	18 2	16 0
Barium						
Barium Molybdenum	ppm	ASTM D5185m	10	2	2	0
Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m	10	2 71	2 67	0 63
Barium Molybdenum Manganese Magnesium	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	100	2 71 <1	2 67 <1	0 63 <1
Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	10 100 450	2 71 <1 389	2 67 <1 360	0 63 <1 482
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	10 100 450 3000	2 71 <1 389 1731	2 67 <1 360 1658	0 63 <1 482 1530
Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	10 100 450 3000 1150 1350	2 71 <1 389 1731 1034	2 67 <1 360 1658 959	0 63 <1 482 1530 976
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	10 100 450 3000 1150 1350	2 71 <1 389 1731 1034 1246	2 67 <1 360 1658 959 1165	0 63 <1 482 1530 976 1193
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	10 100 450 3000 1150 1350 4250	2 71 <1 389 1731 1034 1246 3397	2 67 <1 360 1658 959 1165 3146	0 63 <1 482 1530 976 1193 3954
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	10 100 450 3000 1150 1350 4250 limit/base >25	2 71 <1 389 1731 1034 1246 3397	2 67 <1 360 1658 959 1165 3146 history1	0 63 <1 482 1530 976 1193 3954 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	10 100 450 3000 1150 1350 4250 limit/base >25	2 71 <1 389 1731 1034 1246 3397 current	2 67 <1 360 1658 959 1165 3146 history1	0 63 <1 482 1530 976 1193 3954 history2 8
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	10 100 450 3000 1150 1350 4250 limit/base >25 >158	2 71 <1 389 1731 1034 1246 3397 current 10 4	2 67 <1 360 1658 959 1165 3146 history1	0 63 <1 482 1530 976 1193 3954 history2 8
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20	2 71 <1 389 1731 1034 1246 3397 current 10 4 <1	2 67 <1 360 1658 959 1165 3146 history1 10 0	0 63 <1 482 1530 976 1193 3954 history2 8 1
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 >5	2 71 <1 389 1731 1034 1246 3397  current 10 4 <1 ^5.8	2 67 <1 360 1658 959 1165 3146 history1 10 0 1	0 63 <1 482 1530 976 1193 3954 history2 8 1 1
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 >5 limit/base >3	2 71 <1 389 1731 1034 1246 3397  current 10 4 <1 ▲ 5.8  current	2 67 <1 360 1658 959 1165 3146 history1 10 0 1  6.0 history1	0 63 <1 482 1530 976 1193 3954 history2 8 1 1 <1.0
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 >5 limit/base >3	2 71 <1 389 1731 1034 1246 3397  current 10 4 <1 ▲ 5.8  current 0.3	2 67 <1 360 1658 959 1165 3146 history1 10 0 1 ▲ 6.0 history1 0.4	0 63 <1 482 1530 976 1193 3954 history2 8 1 1 <1.0
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m  MEthod ASTM D5185m ASTM D7844 *ASTM D7844 *ASTM D7624	10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 >5 limit/base >3 >20	2 71 <1 389 1731 1034 1246 3397  current 10 4 <1 ▲ 5.8  current 0.3 10.3	2 67 <1 360 1658 959 1165 3146 history1 10 0 1 ▲ 6.0 history1 0.4	0 63 <1 482 1530 976 1193 3954 history2 8 1 1 <1.0 history2 0.5 11.2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D3524  method  *ASTM D7844  *ASTM D7624  *ASTM D76145	10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 >5 limit/base >3 >20 >30	2 71 <1 389 1731 1034 1246 3397 current 10 4 <1 ▲ 5.8 current 0.3 10.3 21.3	2 67 <1 360 1658 959 1165 3146 history1 10 0 1  6.0 history1 0.4 10.1 20.4	0 63 <1 482 1530 976 1193 3954 history2 8 1 <1.0 history2 0.5 11.2 22.5
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation FLUID DEGRADA	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m  Method ASTM D5185m ASTM D7624 *ASTM D7624 *ASTM D7624 *ASTM D7615  method	10 100 450 3000 1150 1350 4250 limit/base >25 >158 >20 >5 limit/base >3 >20 >30 limit/base >25	2 71 <1 389 1731 1034 1246 3397 current 10 4 <1 ▲ 5.8 current 0.3 10.3 21.3 current	2 67 <1 360 1658 959 1165 3146 history1 10 0 1 ▲ 6.0 history1 0.4 10.1 20.4 history1	0 63 <1 482 1530 976 1193 3954 history2 8 1 1 <1.0 history2 0.5 11.2 22.5 history2



## **OIL ANALYSIS REPORT**







Laboratory Sample No. Lab Number **Unique Number** 

: WC0844988 : 05963296 : 10669847

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 28 Sep 2023 Diagnosed

: 29 Sep 2023 Diagnostician : Wes Davis

2.0 0.0

Test Package : FLEET ( Additional Tests: PercentFuel ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) **TOWN OF CHAPEL HILL** 6900 MILLHOUSE RD

CHAPEL HILL, NC US 27516

Contact: Lisa DePasqua Idepasqua@townofchapelhill.org

T: (919)696-4941