




# PROBLEM SUMMARY




Area  
**{unassigned}**  
 Machine Id  
**JOHN DEERE 950K 1T0950KPVJF339846**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HYDRAU (23 GAL)**

Sample Rating Trend

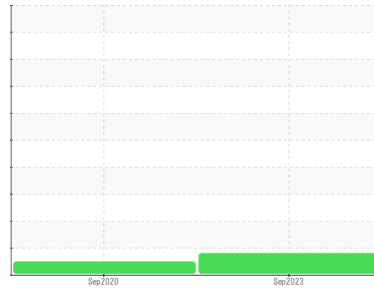

## COMPONENT CONDITION SUMMARY

### ▲ Ferrous Alloys

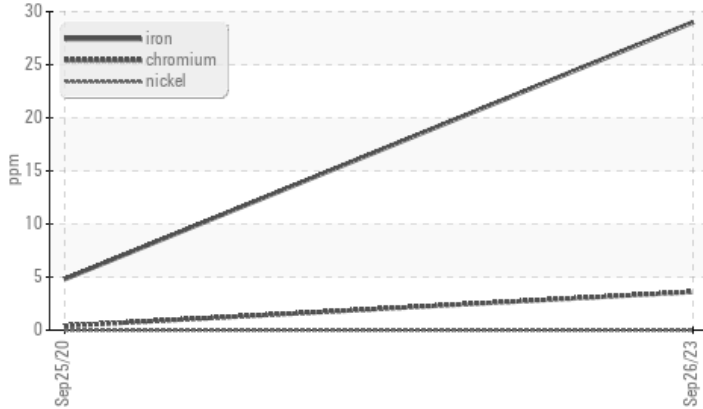

## RECOMMENDATION

No corrective action is recommended at this time.  
 Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	NORMAL	---
Iron	ppm	ASTM D5185m	>23	<b>▲ 29</b>	5	---

Customer Id: LESMAROH  
 Sample No.: LEC0044327  
 Lab Number: 05963482  
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS

**25 Sep 2020 Diag: Don Baldrige**

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report






# OIL ANALYSIS REPORT



Area  
**{unassigned}**  
 Machine Id  
**JOHN DEERE 950K 1T0950KPVJF339846**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HYDRAU (23 GAL)**

## Sample Rating Trend

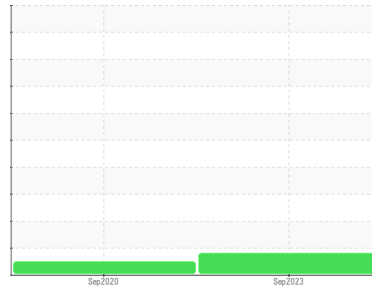

**WEAR**



### DIAGNOSIS

#### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### ▲ Wear

The iron level is abnormal. All other component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>LEC0044327</b>	LEC0016856	---
Sample Date	Client Info		<b>26 Sep 2023</b>	25 Sep 2020	---
Machine Age	hrs	Client Info	<b>3125</b>	326	---
Oil Age	hrs	Client Info	<b>3125</b>	326	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>ABNORMAL</b>	NORMAL	---

### WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184	>50	<b>16</b>	16	---
Iron	ppm	ASTM D5185m	>23	<b>▲ 29</b>	5
Chromium	ppm	ASTM D5185m	>9	<b>4</b>	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0
Silver	ppm	ASTM D5185m		<b>0</b>	<1
Aluminum	ppm	ASTM D5185m	>9	<b>2</b>	0
Lead	ppm	ASTM D5185m	>28	<b>0</b>	<1
Copper	ppm	ASTM D5185m	>51	<b>6</b>	4
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0
Antimony	ppm	ASTM D5185m		<b>---</b>	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	2
Barium	ppm	ASTM D5185m		<b>0</b>	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1
Magnesium	ppm	ASTM D5185m		<b>0</b>	3
Calcium	ppm	ASTM D5185m	87	<b>87</b>	88
Phosphorus	ppm	ASTM D5185m	727	<b>592</b>	605
Zinc	ppm	ASTM D5185m	900	<b>811</b>	766
Sulfur	ppm	ASTM D5185m	1500	<b>1637</b>	1386

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>31	<b>5</b>	0
Sodium	ppm	ASTM D5185m	>21	<b>2</b>	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3






### FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>80000	<b>7073</b>	18221	---
Particles >6µm	ASTM D7647	>20000	<b>1080</b>	3083	---
Particles >14µm	ASTM D7647	>640	<b>45</b>	121	---
Particles >21µm	ASTM D7647	>160	<b>9</b>	21	---
Particles >38µm	ASTM D7647	>40	<b>0</b>	1	---
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>23/21/16	<b>20/17/13</b>	21/19/14	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.71</b>	0.782


# OIL ANALYSIS REPORT

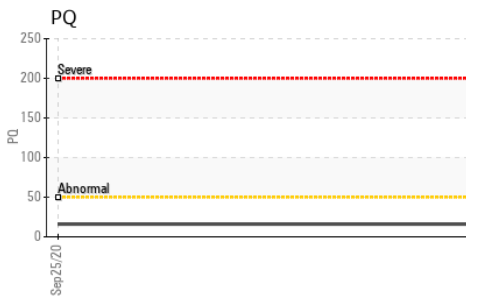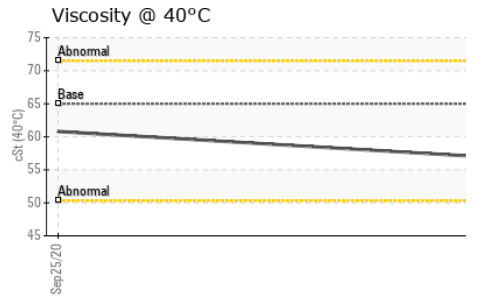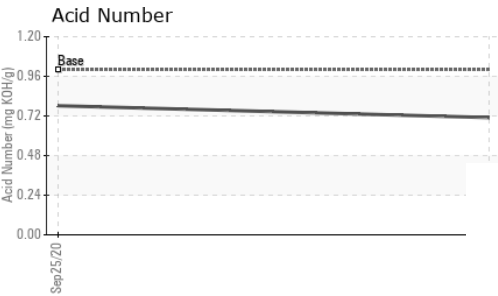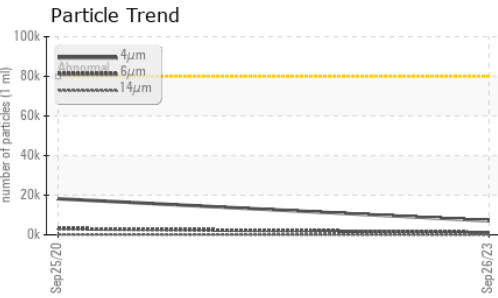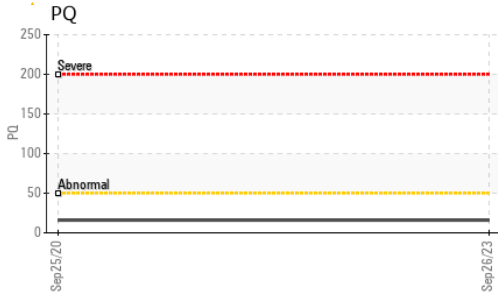






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	65	56.9	60.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

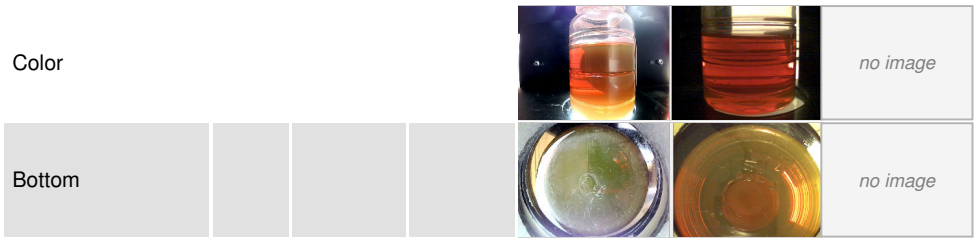

## GRAPHS

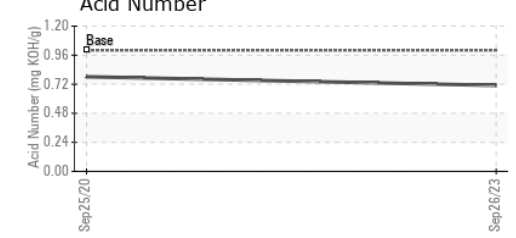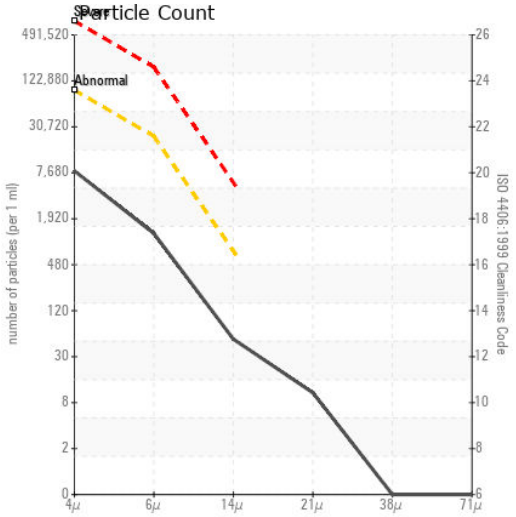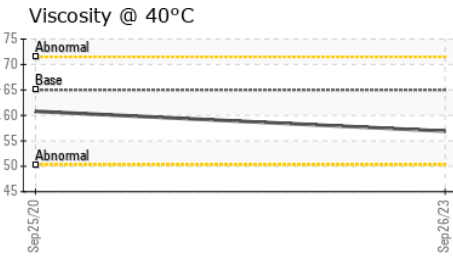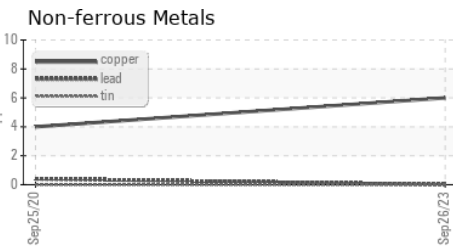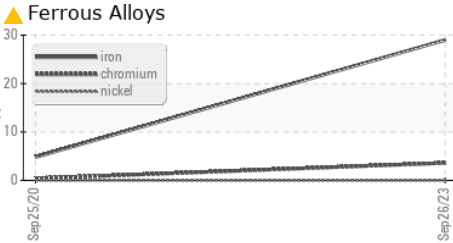

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0044327 **Received** : 28 Sep 2023  
**Lab Number** : 05963482 **Diagnosed** : 29 Sep 2023  
**Unique Number** : 10670033 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com  
 T:  
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)