

PROBLEM SUMMARY

AF12-240-M82119 PRESS BOTTOM RIGHT STEEL BELT DRIVE

Gear Drive

ISO ISO

KLUBER Klubersynth GEM 4-320 N (--- GAL)

COMPONENT CONDITION SUMMARY



RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TES	ST RESULTS			
Sample Status			ATTENTION	
Particles >4µm	ASTM D7647	>20000	<u> </u>	
Oil Cleanliness	ISO 4406 (c)	>21/19/16	22/18/14	

Sample Rating Trend

Customer Id: ARAGRAUS Sample No.: WC0824127 Lab Number: 05963557 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend ISO SAMPLE INFORMATION method

current

history1

history2

Machine Id AF12-240-M82119 PRESS BOTTOM RIGHT STEEL BELT DRIVE Component

Gear Drive Fluic

KLUBER Klubersynth GEM 4-320 N (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAIVIFLE INFORM		method	IIIIII/Dase	current	TIIStOLAT	Thistory2
Sample Number		Client Info		WC0824127		
Sample Date		Client Info		22 Sep 2023		
Machine Age	yrs	Client Info		5		
Oil Age	yrs	Client Info		0		
Oil Changed	, -	Client Info		N/A		
Sample Status				ATTENTION		
÷	_					
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		22		
Iron	ppm	ASTM D5185m	>150	20		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	<1		
Lead	ppm	ASTM D5185m		0		
Copper	ppm	ASTM D5185m		<1		
Tin	ppm	ASTM D5185m		0		
Vanadium		ASTM D5185m	2.10	0		
Cadmium	ppm	ASTM D5185m		0		
Gaumium	ppm	NOTIVI DOTION		U		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	25	25		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	0	<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	0	0		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	400	489		
Zinc	ppm	ASTM D5185m	0	2		
Sulfur	ppm	ASTM D5185m	6500	5647		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<u>∖50</u>	39		
Sodium		ASTM D5185m	>50			
Potassium	ppm	ASTM D5185m	>20	<1 0		
	ppm			0.024		
Water ppm Water	%	ASTM D6304 ASTM D6304		248.8		
ppin water	ppm	ASTIVI D0304	>1000	240.0		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<mark>/</mark> 26041		
Particles >6µm		ASTM D7647	>5000	1892		
Particles >14µm		ASTM D7647	>640	86		
Particles >21µm		ASTM D7647	>160	48		
Particles >38µm		ASTM D7647	>40	13		
Particles >71µm		ASTM D7647	>10	2		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<u> </u>		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
		ASTM D8045	0.8	1.35		
Acid Number (AN)	mg KOH/g	AG HVI D0040	0.0			


limit/base

Report Id: ARAGRAUS [WUSCAR] 05963557 (Generated: 10/05/2023 05:00:27) Rev: 1

Submitted By: CAIDEN ASHMUN



OIL ANALYSIS REPORT

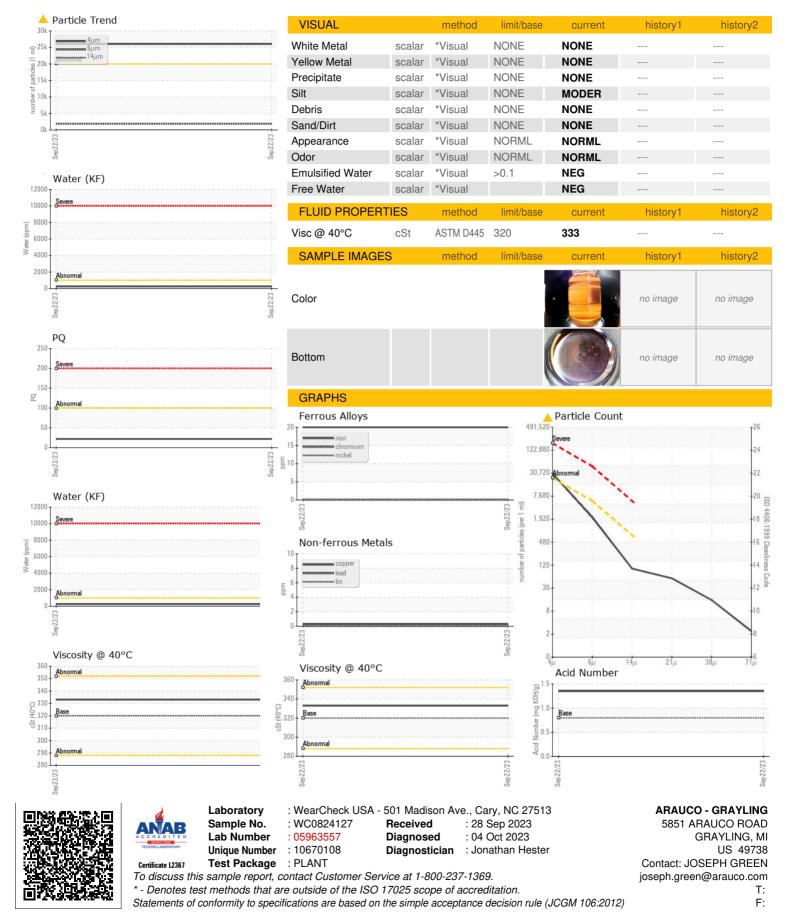

Submitted By: CAIDEN ASHMUN

Page 4 of 4