

OIL ANALYSIS REPORT

DT

NORMAL




FRICK NH3 - OER-12 OK19120 (S/N S005FFEFTHAA3)

Component

Refrigeration Compressor

JAX CRYOGUARD PLUS 68 (--- GAL)





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jul2021	Jan2022	Jan2023	May2023	Sep2023	
SAMPLE INFORM	IATION	method	limit/base		current	history1	history2
Sample Number		Client Info		USP	242804	USP242805	USP240464
Sample Date		Client Info		27 S	ep 2023	30 May 2023	19 Jan 2023
Machine Age	hrs	Client Info		0		0	0
Oil Age	hrs	Client Info		0		0	0
Oil Changed		Client Info		N/A		N/A	N/A
Sample Status				NOR	MAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base		current	history1	history2
Iron	ppm	ASTM D5185m	>8	0		0	<u> </u>
Chromium	ppm	ASTM D5185m	>2	0		0	0
Nickel	ppm	ASTM D5185m		0		0	<1
Titanium	ppm	ASTM D5185m		0		0	0
Silver	ppm	ASTM D5185m	>2	0		0	0
Aluminum	ppm	ASTM D5185m	>3	<1		0	0
Lead	ppm	ASTM D5185m	>2	0		0	0
Copper	ppm	ASTM D5185m	>8	<1		0	<1
Tin	ppm	ASTM D5185m	>4	0		0	0
Antimony	ppm	ASTM D5185m					
Vanadium	ppm	ASTM D5185m		0		0	0
Cadmium	ppm	ASTM D5185m		0		0	0
ADDITIVES	1-1-	method	limit/base		current	history1	history2
Boron	ppm	ASTM D5185m		0		0	0
Barium	ppm	ASTM D5185m		0		0	0
Molybdenum	ppm	ASTM D5185m		0		0	0
Manganese	ppm	ASTM D5185m		<1		0	<1
Magnesium	ppm	ASTM D5185m		0		0	0
Calcium	ppm	ASTM D5185m		0		<1	0
Phosphorus	ppm	ASTM D5185m		0		0	0
Zinc	ppm	ASTM D5185m		0		0	0
Sulfur	ppm	ASTM D5185m		39	1	25	0
	PPIII		12				
CONTAMINANTS		method	limit/base		current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		0	1
Sodium	ppm	ASTM D5185m		<1		0	0
Potassium	ppm	ASTM D5185m	>20	0		0	0
Water	%	ASTM D6304	>0.01		001	0.001	0.005
ppm Water	ppm	ASTM D6304	>100	0.0	00	10.5	50.0
FLUID CLEANLIN	ESS	method	limit/base		current	history1	history2
Particles >4µm		ASTM D7647	>10000	38	7	1747	<u></u> 10680
Particles >6µm		ASTM D7647	>2500	10	6	345	975
Particles >14µm		ASTM D7647	>320	8		10	16
Particles >21µm		ASTM D7647	>80	2		1	3
Particles >38µm		ASTM D7647	>20	0		0	0
Particles >71µm		ASTM D7647	>4	0		0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	16	/14/10	18/16/10	<u>\</u> 21/17/11
FLUID DEGRADA	TION	method	limit/base		current	history1	history2



OIL ANALYSIS REPORT

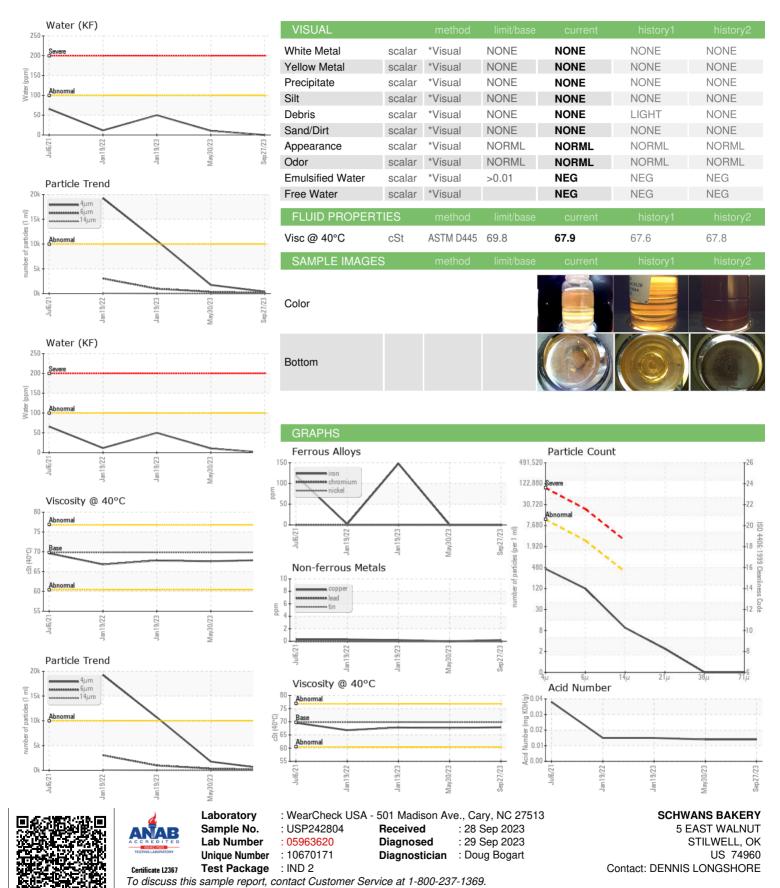

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

T: (918)696-8296