

OIL ANALYSIS REPORT

ZOKM01BE (S/N GZJ00541)

Sample Rating Trend DIRT X



Biogas Engine S5 S (--- GAL)

| Car Color | SHELL MYSELLA |
|-----------|---------------|
| NOSIS | |

Component

| | | | NZUZZ MUDZU | 22 Jan2023 P802023 | Abizor2 Maktor2 20112052 | AUG2023 | |
|--------------------------------|---------------------|----------|-------------|--------------------|--------------------------|-------------|-------------|
| | SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
| | Sample Number | | Client Info | | WC0770232 | WC0770230 | WC0770228 |
| ma | Sample Date | | Client Info | | 25 Sep 2023 | 14 Sep 2023 | 05 Sep 2023 |
| lone. | Machine Age | hrs | Client Info | | 80544 | 80286 | 80074 |
| S | Oil Age | hrs | Client Info | | 446 | 188 | 792 |
| | Oil Changed | | Client Info | | Not Changd | Changed | Not Changd |
| | Sample Status | | | | SEVERE | NORMAL | SEVERE |
| CONTAN Fuel Glycol | CONTAMINATION | ١ | method | limit/base | current | history1 | history2 |
| | Fuel | | WC Method | >4.0 | <1.0 | <1.0 | <1.0 |
| | Glycol | | WC Method | | NEG | NEG | NEG |
| | WEAR METALS | | method | limit/base | current | history1 | history2 |
| | Iron | ppm | ASTM D5185m | >15 | 6 | 4 | 7 |
| is | Chromium | ppm | ASTM D5185m | >4 | <1 | <1 | <1 |
| _ | Nickel | ppm | ASTM D5185m | >2 | <1 | <1 | <1 |
| S. | Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | Silver | ppm | ASTM D5185m | >5 | 0 | 0 | 0 |
| | Aluminum | ppm | ASTM D5185m | >6 | 4 | 4 | 5 |
| | Lead | ppm | ASTM D5185m | >9 | <1 | <1 | <1 |
| | Copper | ppm | ASTM D5185m | >6 | 2 | <1 | 2 |
| | Tin | ppm | ASTM D5185m | >4 | 4 | 2 | 5 |
| | Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | ADDITIVES | | method | limit/base | current | history1 | history2 |
| | Boron | ppm | ASTM D5185m | | 3 | <1 | 3 |
| | Barium | ppm | ASTM D5185m | | 2 | 0 | 2 |
| | Molybdenum | ppm | ASTM D5185m | | 4 | 4 | 4 |
| | Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | Magnesium | ppm | ASTM D5185m | | 17 | 17 | 18 |
| | Calcium | ppm | ASTM D5185m | | 1547 | 1491 | 1605 |
| | Phosphorus | ppm | ASTM D5185m | 300 | 327 | 315 | 328 |
| | Zinc | ppm | ASTM D5185m | | 420 | 404 | 420 |
| | Sulfur | ppm | ASTM D5185m | | 3421 | 3674 | 3273 |
| Silicon Sodium Potassium | CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| | Silicon | ppm | ASTM D5185m | >181 | 0 270 | 152 | 9318 |
| | Sodium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | Potassium | ppm | ASTM D5185m | >20 | <1 | <1 | <1 |
| | INFRA-RED | | method | limit/base | current | history1 | history2 |
| | Soot % | % | *ASTM D7844 | | 0 | 0 | 0 |
| | Nitration | Abs/cm | *ASTM D7624 | >20 | 4.5 | 3.8 | 4.9 |
| | Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 21.2 | 18.6 | 22.7 |
| | FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| | Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 13.8 | 11.2 | 15.0 |
| | Acid Number (AN) | mg KOH/g | ASTM D8045 | | 1.18 | 0.77 | 1.24 |
| | Dese Nevelsen (DNI) | KOUK | AOTH DOOD | F 0 | | 0.50 | 0.00 |

Base Number (BN) mg KOH/g ASTM D2896 5.3

DIAG

Recommendation

We recommend that you drain the oil and per filter service on this component if not already We recommend an early resample to monitor condition.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the c suitable for further service. The oil is no longe serviceable due to the presence of contamina


3.30

3.56

3.62



OIL ANALYSIS REPORT

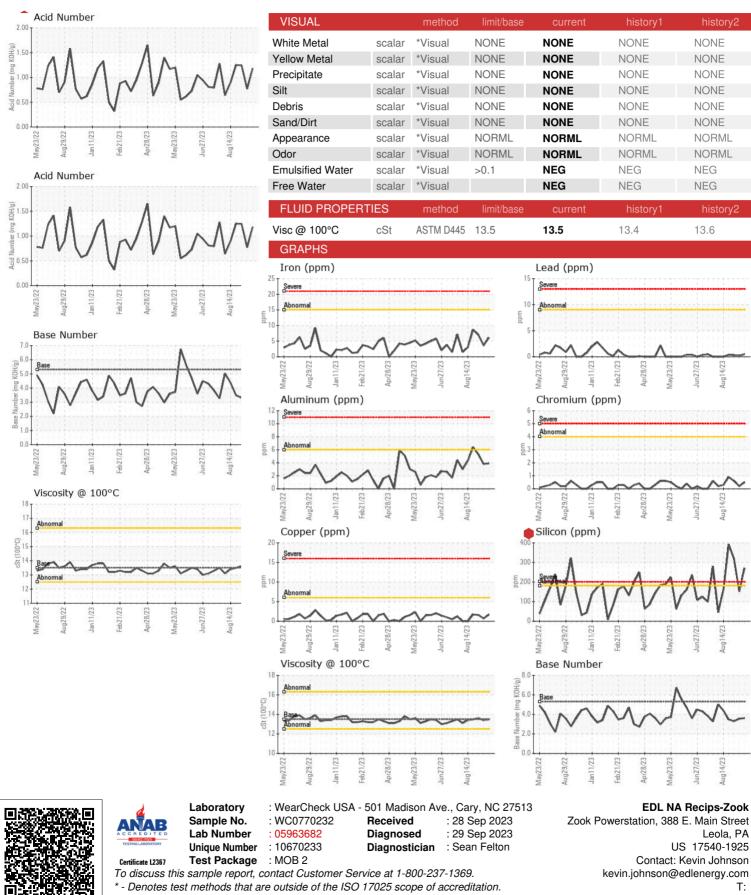

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: Jayme Hinnershitz

Page 2 of 2

Aug 14/23

Leola, PA

T:

F:

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

13.6

EC/LCum

un27/2:

ug14/23