




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

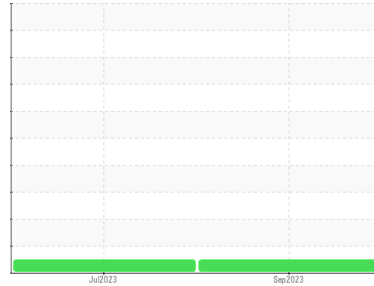

Area
IRIG [6106435]
 Machine Id
IRIG-LDR-VECH-0002 IRIG-LDR-VECH-0002
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 LE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	HLC0002815	HLC0002717	---
Sample Date	Client Info	16 Sep 2023	30 Jul 2023	---
Machine Age	hrs Client Info	2669	1646	---
Oil Age	hrs Client Info	500	500	---
Oil Changed	Client Info	Changed	N/A	---
Sample Status		NORMAL	NORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	---
Glycol	WC Method	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	2	5	---
Chromium	ppm ASTM D5185m >20	0	<1	---
Nickel	ppm ASTM D5185m >5	0	0	---
Titanium	ppm ASTM D5185m	<1	<1	---
Silver	ppm ASTM D5185m >3	0	0	---
Aluminum	ppm ASTM D5185m >20	0	<1	---
Lead	ppm ASTM D5185m >40	<1	<1	---
Copper	ppm ASTM D5185m >30	0	<1	---
Tin	ppm ASTM D5185m >15	0	0	---
Vanadium	ppm ASTM D5185m	0	<1	---
Cadmium	ppm ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	121	98	---
Barium	ppm ASTM D5185m	0	0	---
Molybdenum	ppm ASTM D5185m	0	<1	---
Manganese	ppm ASTM D5185m	<1	<1	---
Magnesium	ppm ASTM D5185m	777	840	---
Calcium	ppm ASTM D5185m	1351	1442	---
Phosphorus	ppm ASTM D5185m 1200	713	760	---
Zinc	ppm ASTM D5185m 1300	851	910	---
Sulfur	ppm ASTM D5185m 3200	3308	3943	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	4	6	---
Sodium	ppm ASTM D5185m	2	2	---
Potassium	ppm ASTM D5185m >20	6	5	---

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0	0.1	---
Nitration	Abs/cm *ASTM D7624 >20	6.6	7.6	---
Sulfation	Abs/.1mm *ASTM D7415 >30	17.6	17.4	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	12.3	12.5	---
Base Number (BN)	mg KOH/g ASTM D2896 9.6	8.4	9.82	---








OIL ANALYSIS REPORT

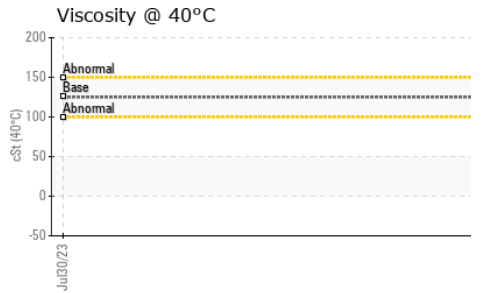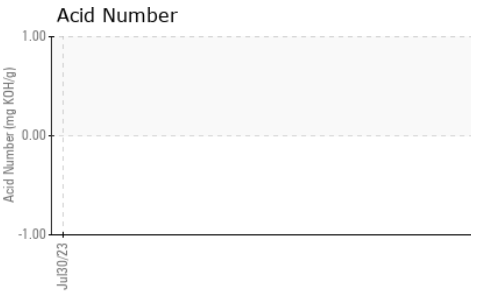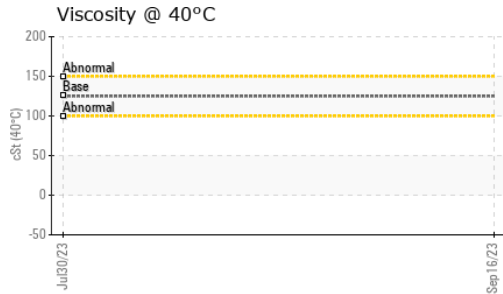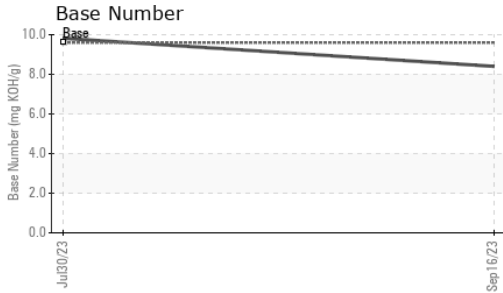

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.7	14.32	14.0

GRAPHS

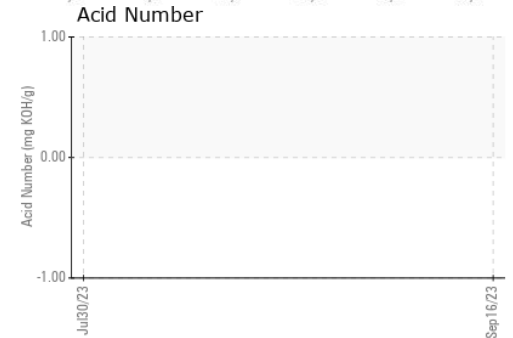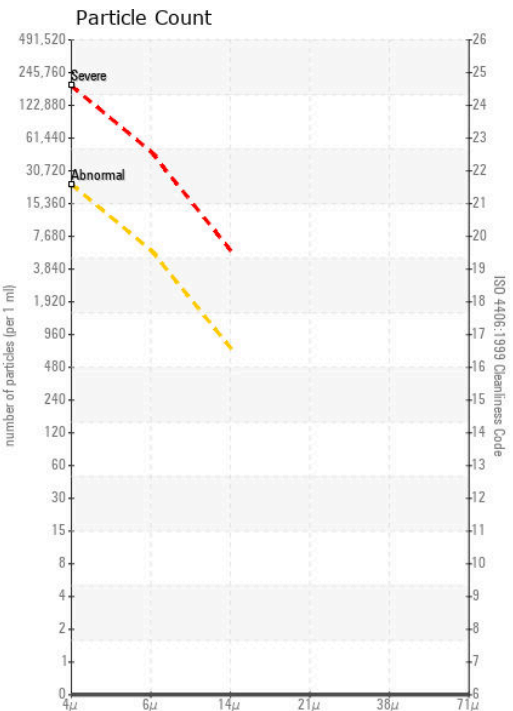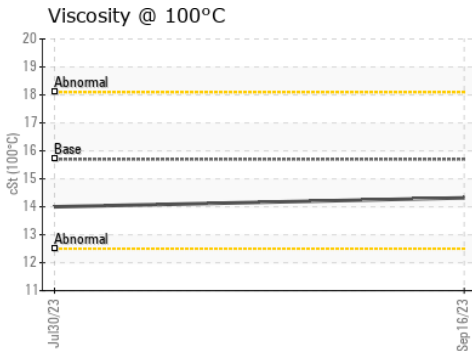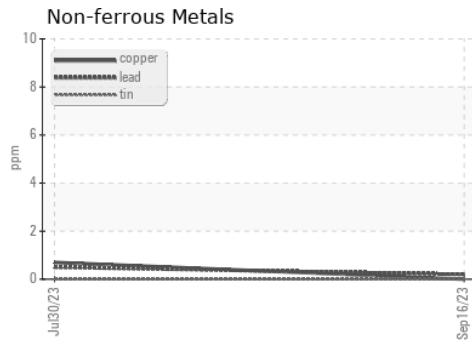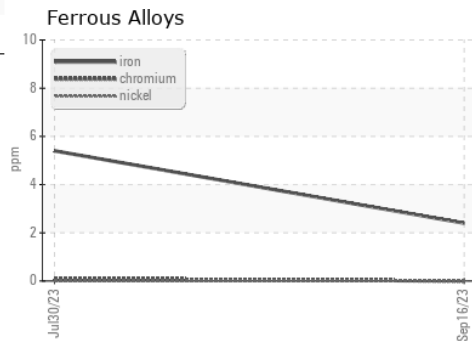

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HLC0002815 **Received** : 28 Sep 2023
Lab Number : 05964178 **Diagnosed** : 04 Oct 2023
Unique Number : 10670729 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KV40, PrtCount)

HILCORP EXPLORATION ALASKA - MILNE POINT
 1000 MILNE POINT RD
 PRUDOE BAY, AK
 US 99734
 Contact: Evan Reilly
 evan.reilly@hilcorp.com
 T: (907)670-3231
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)