


## **PROBLEM SUMMARY**


# KAESER AIRTOWER 7.5 6176212 (S/N 2017)

Compressor

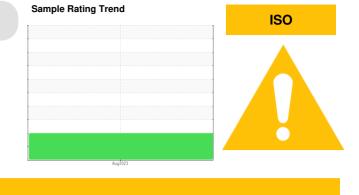

### KAESER SIGMA (OEM) M-460 (--- GAL)

#### COMPONENT CONDITION SUMMARY

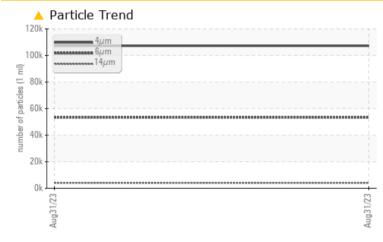

#### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL							
Particles >6µm	ASTM D7647 >1300	<u> </u>							
Particles >14µm	ASTM D7647 >80	<u> </u>							
Particles >21µm	ASTM D7647 >20	<u>▲ 866</u>							
Particles >38µm	ASTM D7647 >4	<u> </u>							
Oil Cleanliness	ISO 4406 (c) >/17/	13 🔺 <b>24/23/19</b>							

Customer Id: HERLUD Sample No.: KC125417 Lab Number: 05964210 Test Package: IND 2



To manage this report scan the QR code


*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



### **OIL ANALYSIS REPORT**

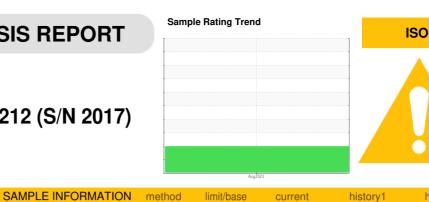

historv2

#### Machine Id KAESER AIRTOWER 7.5 6176212 (S/N 2017) Component

Compressor Fluid

KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC125417		
Sample Date		Client Info		31 Aug 2023		
Machine Age	hrs	Client Info		2886		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	16		
Tin		ASTM D5185m	>50 >10	0		
Vanadium	ppm	ASTM D5185m	>10	0		
Cadmium	ppm	ASTM D5185m ASTM D5185m		0		
	ppm	ASTIM DOTIONI		U		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	0		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	2		
Zinc	ppm	ASTM D5185m	0	1		
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.05	0.003		
ppm Water	ppm	ASTM D6304	>500	35.7		
FLUID CLEANLI	VESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		107290		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<b>4041</b>		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	<u> </u>		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>4/23/19</b>		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.28		
. ,	· ·					



0.00

1000

600 Water (

4000

200

60

55

ှ 50

-73 45 B

40

35

Water (KF)

Abnorma 0 vug31

Abnorma

Se

Viscosity @ 40°C

Built for a lifetime

# **OIL ANALYSIS REPORT**

scalar

scalar

scalar

scalar

method

\*Visual

\*Visual

\*Visua

\*Visual

scalar \*Visual

limit/base

NONE

NONE

NONE

NONE

NONE

current

NONE

NONE

NONE

NONE

LIGHT

history1

history2

