




OIL ANALYSIS REPORT

Sample Rating Trend

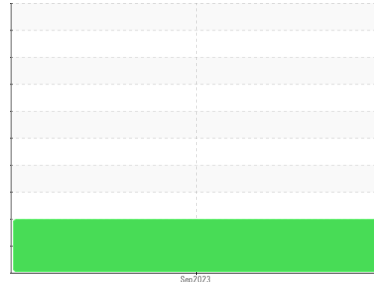

DEGRADATION

Machine Id
DODGE 24843-03

Component
Gasoline Engine

Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time.

▲ Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

The AN level is at the top-end of the recommended limit.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WCM2006546	---	---
Sample Date	Client Info		28 Sep 2023	---	---
Machine Age	mls	Client Info	0	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	▲ 235	---	---
Chromium	ppm	ASTM D5185m >20	4	---	---
Nickel	ppm	ASTM D5185m >5	2	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >40	25	---	---
Lead	ppm	ASTM D5185m >50	<1	---	---
Copper	ppm	ASTM D5185m >155	30	---	---
Tin	ppm	ASTM D5185m >10	2	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	54	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	107	---	---
Manganese	ppm	ASTM D5185m	2	---	---
Magnesium	ppm	ASTM D5185m	618	---	---
Calcium	ppm	ASTM D5185m	1158	---	---
Phosphorus	ppm	ASTM D5185m	686	---	---
Zinc	ppm	ASTM D5185m	879	---	---
Sulfur	ppm	ASTM D5185m	2581	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	17	---	---
Sodium	ppm	ASTM D5185m >400	21	---	---
Potassium	ppm	ASTM D5185m >20	2	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	---	---
Nitration	Abs/cm	*ASTM D7624 >20	17.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	36.5	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	36.6	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	▲ 3.41	---	---



OIL ANALYSIS REPORT

▲ Ferrous Alloys



▲ Ferrous Alloys




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	---	---
Precipitate	scalar	*Visual	NONE	---	---
Silt	scalar	*Visual	NONE	---	---
Debris	scalar	*Visual	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	---	---
Appearance	scalar	*Visual	NORML	---	---
Odor	scalar	*Visual	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	---	---
Free Water	scalar	*Visual	---	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.4	---	---

GRAPHS

Viscosity @ 100°C

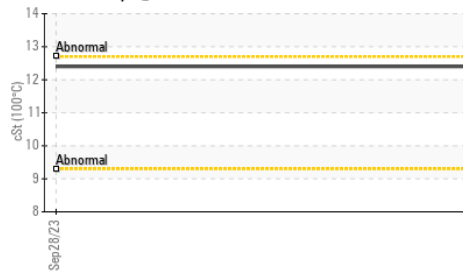

▲ Iron (ppm)



Aluminum (ppm)




Copper (ppm)



Viscosity @ 100°C




Lead (ppm)

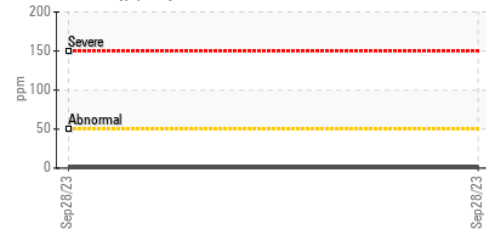

Chromium (ppm)



Silicon (ppm)

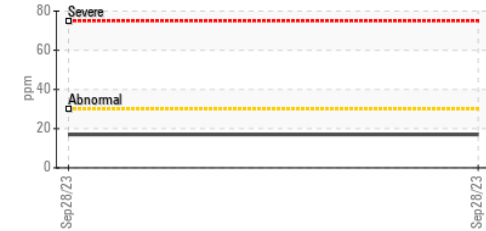

▲ Acid Number



Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WCM2006546 **Received** : 28 Sep 2023
Lab Number : 05964288 **Diagnosed** : 03 Oct 2023
Unique Number : 10670839 **Diagnostician** : Jonathan Hester
Test Package : MOB 2

SOUTHERN AUTOMOTIVE CONSULTING
 P.O. BOX 730
 CREEDMOOR, NC
 US 27522
 Contact: ANDREW MORTON
 andymorton711@yahoo.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: