



# PROBLEM SUMMARY

Sample Rating Trend

GLYCOL




Machine Id  
**NOT GIVEN WC0830963**  
Component  
**Diesel Engine**  
Fluid  
**NOT GIVEN (--- QTS)**



## COMPONENT CONDITION SUMMARY

### ▲ Glycol Contamination

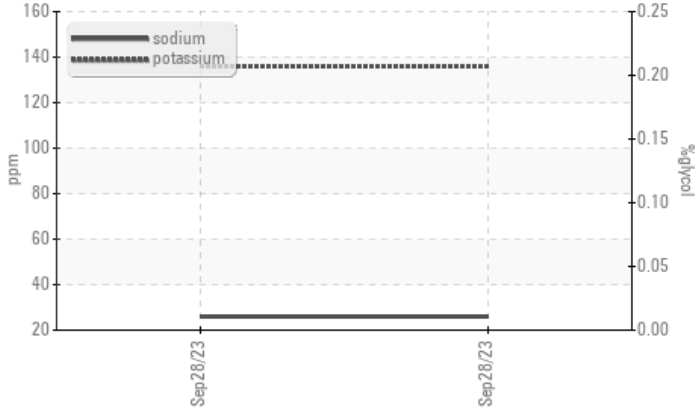

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Potassium	ppm	ASTM D5185m	>20	▲ 136	---	---

Customer Id: INTCLO  
Sample No.: WC0830963  
Lab Number: 05964405  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

GLYCOL



Machine Id  
**NOT GIVEN WC0830963**  
 Component  
**Diesel Engine**  
 Fluid  
**NOT GIVEN (--- QTS)**



## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0830963</b>	---	---
Sample Date	Client Info	<b>28 Sep 2023</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>14</b>	---	---
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	---	---
Titanium	ppm ASTM D5185m	<b>0</b>	---	---
Silver	ppm ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >20	<b>9</b>	---	---
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185m >330	<b>4</b>	---	---
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	---	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>105</b>	---	---
Barium	ppm ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m	<b>60</b>	---	---
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm ASTM D5185m	<b>730</b>	---	---
Calcium	ppm ASTM D5185m	<b>1076</b>	---	---
Phosphorus	ppm ASTM D5185m	<b>932</b>	---	---
Zinc	ppm ASTM D5185m	<b>1179</b>	---	---
Sulfur	ppm ASTM D5185m	<b>3534</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>8</b>	---	---
Sodium	ppm ASTM D5185m	<b>26</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>▲ 136</b>	---	---
Glycol	% *ASTM D2982	<b>NEG</b>	---	---

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	---	---
Nitration	Abs/cm *ASTM D7624 >20	<b>16.8</b>	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>12.6</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>19.6</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896	<b>17.5</b>	---	---







# OIL ANALYSIS REPORT

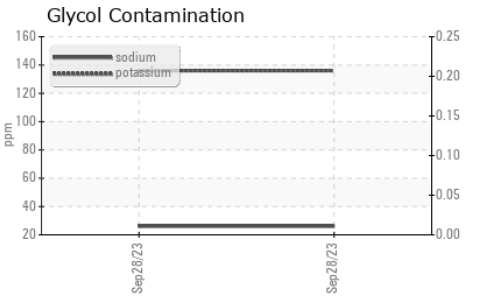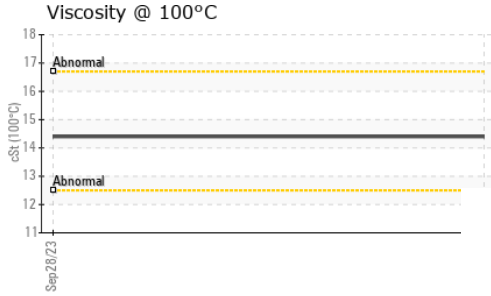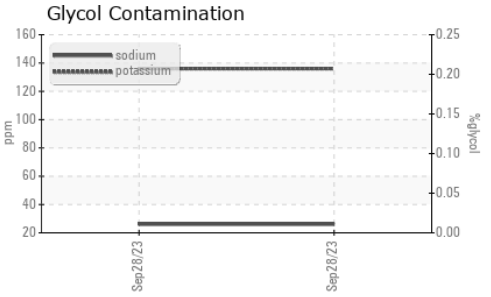

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	---	---

### GRAPHS

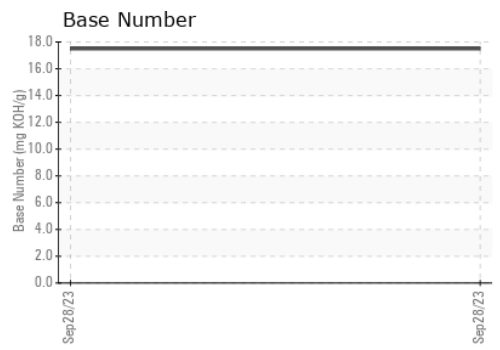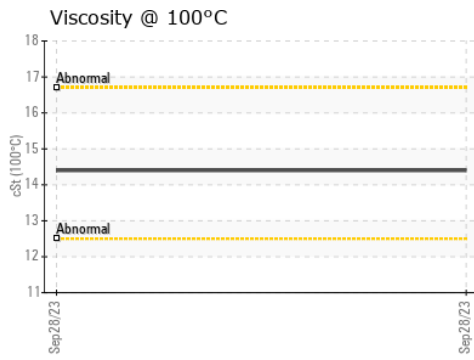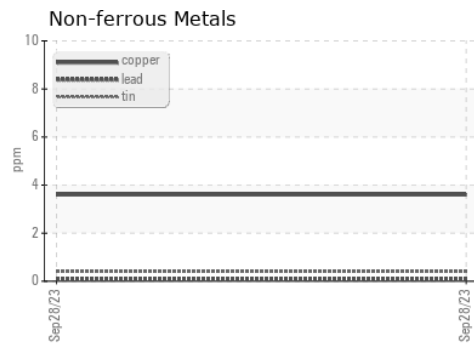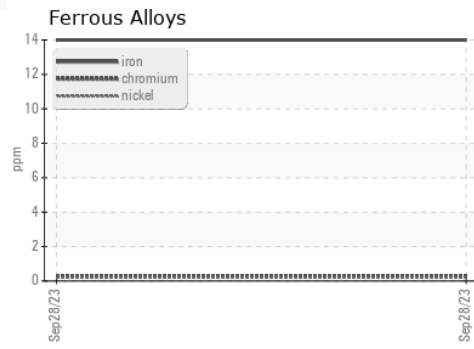

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0830963 **Received** : 29 Sep 2023  
**Lab Number** : 05964405 **Diagnosed** : 03 Oct 2023  
**Unique Number** : 10670956 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**INTERSTATE WASTE-CLOSTER**  
 77 RAILROAD AVENUE  
 CLOSTER, NJ  
 US 07624  
 Contact: Tony Gagliano  
 tgagliano@interstatewaste.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)