




PROBLEM SUMMARY

Sample Rating Trend

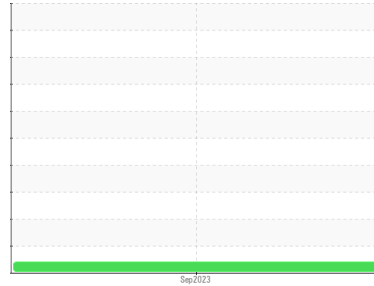

VISCOSITY



Machine Id
SZLG232624
 Component
Diesel Engine
 Fluid
CHEVRON 15W40 (--- QTS)

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 100°C



RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | ATTENTION | | --- | --- | | |
|---------------|-----------|-----------|------|--------|-----|-----|
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | ▲ 11.6 | --- | --- |

Customer Id: DOLGUL
 Sample No.: WC0847144
 Lab Number: 05964463
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|---------------|--------|------|---------|---|
| Change Fluid | --- | --- | ? | Oil and filter change at the time of sampling has been noted. |
| Change Filter | --- | --- | ? | Oil and filter change at the time of sampling has been noted. |

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY



Machine Id
SZLG232624
 Component
Diesel Engine
 Fluid
CHEVRON 15W40 (--- QTS)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info | WC0847144 | --- | --- |
| Sample Date | Client Info | 20 Sep 2023 | --- | --- |
| Machine Age | hrs | Client Info | 1327 | --- |
| Oil Age | hrs | Client Info | 1500 | --- |
| Oil Changed | Client Info | Changed | --- | --- |
| Sample Status | | ATTENTION | --- | --- |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|------------|------------|----------|----------|
| Glycol | WC Method | NEG | --- | --- |

WEAR METALS

| method | limit/base | current | history1 | history2 | |
|----------|------------|------------------|--------------|----------|-----|
| Iron | ppm | ASTM D5185m >100 | 15 | --- | --- |
| Chromium | ppm | ASTM D5185m >20 | 1 | --- | --- |
| Nickel | ppm | ASTM D5185m >4 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | 0 | --- | --- |
| Silver | ppm | ASTM D5185m >3 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m >20 | 6 | --- | --- |
| Lead | ppm | ASTM D5185m >40 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m >330 | 6 | --- | --- |
| Tin | ppm | ASTM D5185m >15 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | 0 | --- | --- |

ADDITIVES

| method | limit/base | current | history1 | history2 | |
|------------|------------|-------------|--------------|----------|-----|
| Boron | ppm | ASTM D5185m | 82 | --- | --- |
| Barium | ppm | ASTM D5185m | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 61 | --- | --- |
| Manganese | ppm | ASTM D5185m | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 361 | --- | --- |
| Calcium | ppm | ASTM D5185m | 1866 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 975 | --- | --- |
| Zinc | ppm | ASTM D5185m | 1208 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 3790 | --- | --- |

CONTAMINANTS

| method | limit/base | current | history1 | history2 | |
|-----------|------------|-----------------|------------|----------|-----|
| Silicon | ppm | ASTM D5185m >25 | 5 | --- | --- |
| Sodium | ppm | ASTM D5185m >50 | 47 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 2 | --- | --- |
| Fuel | % | ASTM D3524 >5 | 0.8 | --- | --- |

INFRA-RED




| method | limit/base | current | history1 | history2 | |
|-----------|------------|-----------------|-------------|----------|-----|
| Soot % | % | *ASTM D7844 >3 | 0.2 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 >20 | 7.4 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 20.1 | --- | --- |

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 | |
|------------------|------------|-----------------|-------------|----------|-----|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 17.4 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.3 | --- | --- |







OIL ANALYSIS REPORT

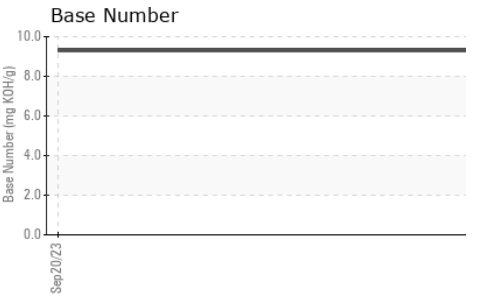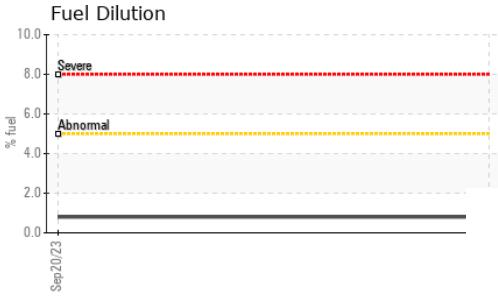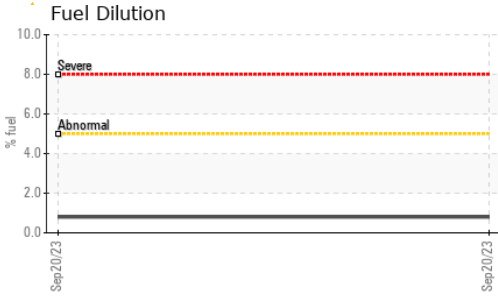

| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | ▲ 11.6 | --- | --- |

GRAPHS

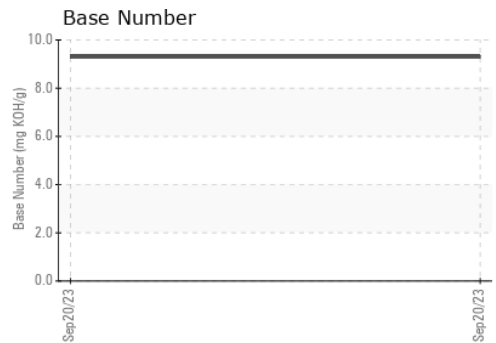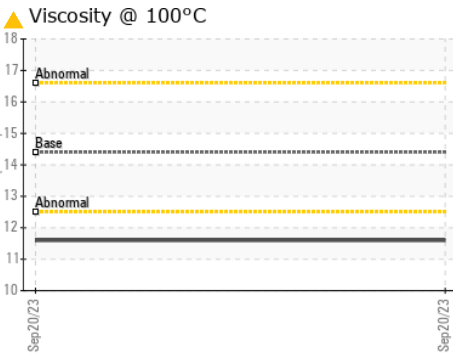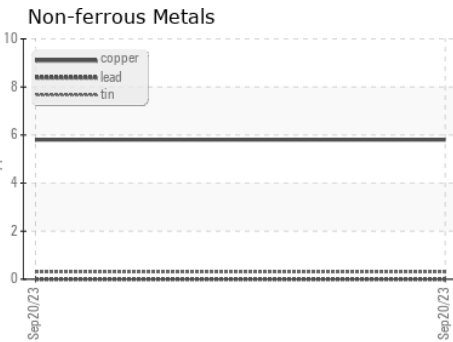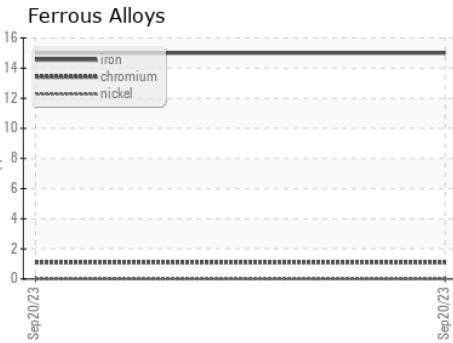

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0847144 Received : 29 Sep 2023
 Lab Number : 05964463 Diagnosed : 03 Oct 2023
 Unique Number : 10671014 Diagnostician : Jonathan Hester
 Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DOLE FRESH FRUIT
 PO BOX 1689
 GULFPORT, MS
 US 39502

Contact: JORDAN JOHNSTON
 jordan.johnston@dole.com

T:
 F: (228)867-2970