



# PROBLEM SUMMARY

Sample Rating Trend



FUEL




Machine Id  
**SZLG232637**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON 15W40 (--- QTS)**

## COMPONENT CONDITION SUMMARY

### ▲ Viscosity @ 100°C



### ▲ Fuel Dilution

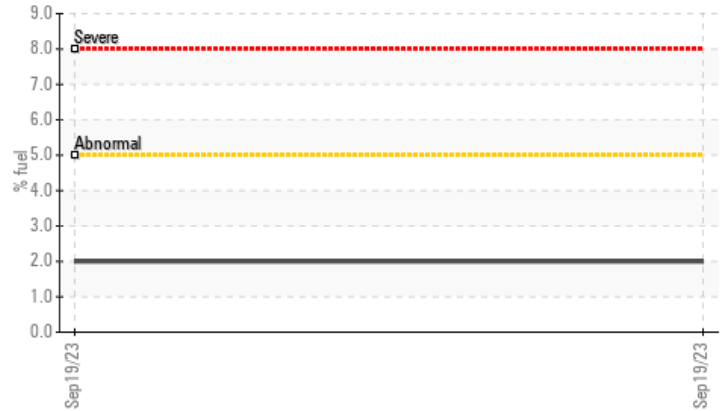

## RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

## PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	---	---
Sulfur	ppm	ASTM D5185m		▲ 3851	---	---
Fuel	%	ASTM D3524	>5	▲ 2.0	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.3	---	---

Customer Id: DOLGUL  
 Sample No.: WC0847082  
 Lab Number: 05964465  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Information Required	---	---	?	Please specify the component make and model with your next sample.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



FUEL



Machine Id  
**SZLG232637**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON 15W40 (--- QTS)**

## DIAGNOSIS

### ▲ Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### ▲ Contamination

Light fuel dilution occurring.

### ▲ Fluid Condition

Sulfur ppm levels are abnormally high. Visc @ 100°C is abnormally low. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0847082</b>	---	---
Sample Date	Client Info	<b>19 Sep 2023</b>	---	---
Machine Age	hrs	Client Info	<b>1399</b>	---
Oil Age	hrs	Client Info	<b>1500</b>	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	<b>11</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>6</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>90</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>61</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>362</b>	---	---
Calcium	ppm	ASTM D5185m	<b>1844</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>983</b>	---	---
Zinc	ppm	ASTM D5185m	<b>1213</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>▲ 3851</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>4</b>	---	---
Sodium	ppm	ASTM D5185m >50	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>1</b>	---	---
Fuel	%	ASTM D3524 >5	<b>▲ 2.0</b>	---	---

## INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.1</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.1</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.7</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.0</b>	---	---







# OIL ANALYSIS REPORT

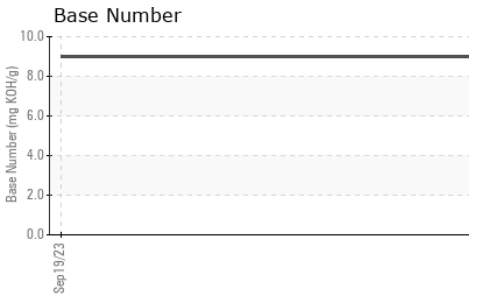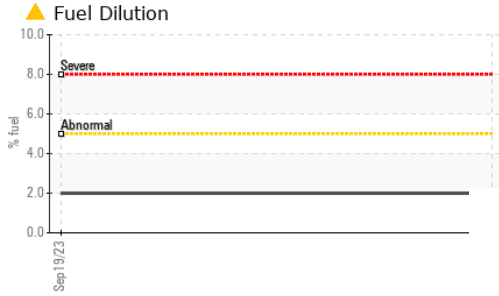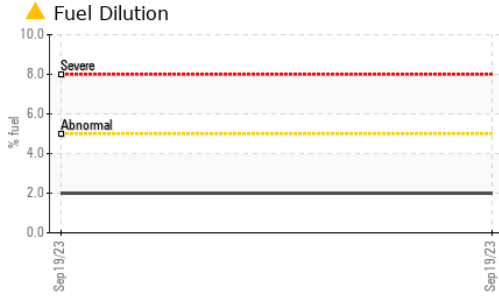

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 11.3	---	---

### GRAPHS

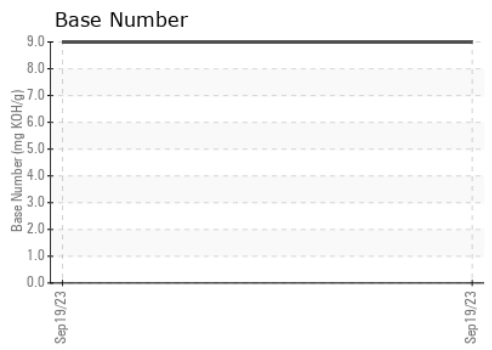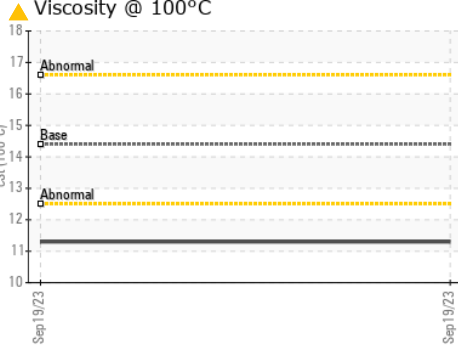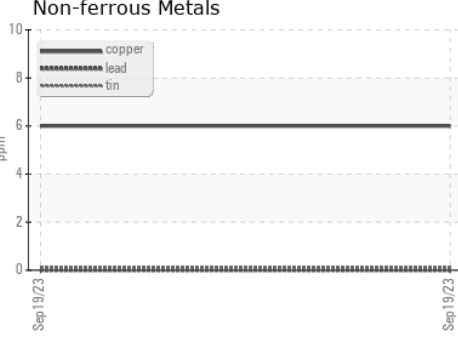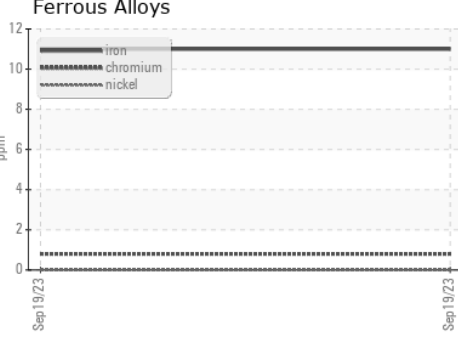

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0847082 **Received** : 29 Sep 2023  
**Lab Number** : 05964465 **Diagnosed** : 03 Oct 2023  
**Unique Number** : 10671016 **Diagnostician** : Wes Davis  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**DOLE FRESH FRUIT**  
 PO BOX 1689  
 GULFPORT, MS  
 US 39502  
 Contact: JORDAN JOHNSTON  
 jordan.johnston@dole.com  
 T:  
 F: (228)867-2970

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)