




OIL ANALYSIS REPORT

Sample Rating Trend

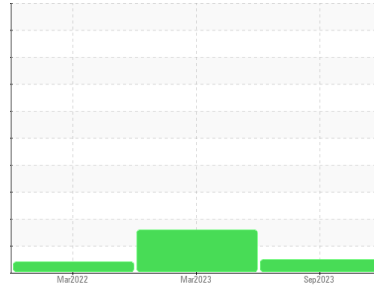

NORMAL



Area
GUAY SON [CONHER]
 Machine Id
IBACO BM DAGIO I
 Component
Transmission (Manual)
 Fluid
RALOY SAE 50 (60 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012864	KL0011410	KL0009160
Sample Date	Client Info		21 Sep 2023	30 Mar 2023	25 Mar 2022
Machine Age	hrs	Client Info	13298	13297	0
Oil Age	hrs	Client Info	1	1543	1000
Oil Changed	Client Info		N/A	Not Changd	N/A
Sample Status			NORMAL	ATTENTION	ATTENTION

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<1	3	1
Chromium	ppm	ASTM D5185m >5	0	0	0
Nickel	ppm	ASTM D5185m >5	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >7	0	0	<1
Aluminum	ppm	ASTM D5185m >25	<1	<1	<1
Lead	ppm	ASTM D5185m >45	4	3	14
Copper	ppm	ASTM D5185m >225	10	10	29
Tin	ppm	ASTM D5185m >10	<1	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	22	23	4
Barium	ppm	ASTM D5185m	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	1
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	13	10	6
Calcium	ppm	ASTM D5185m	3836	3883	3704
Phosphorus	ppm	ASTM D5185m	956	939	947
Zinc	ppm	ASTM D5185m	859	865	923
Sulfur	ppm	ASTM D5185m	6066	6649	4226

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	12	12	8
Sodium	ppm	ASTM D5185m	1	1	4
Potassium	ppm	ASTM D5185m >20	0	0	0

FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		12010	14888	17241
Particles >6µm	ASTM D7647	>2500	975	▲ 3918	▲ 3822
Particles >14µm	ASTM D7647	>320	41	▲ 434	225
Particles >21µm	ASTM D7647	>80	13	▲ 114	35
Particles >38µm	ASTM D7647	>20	1	11	3
Particles >71µm	ASTM D7647	>4	1	1	0
Oil Cleanliness	ISO 4406 (c)	>18/15	17/13	▲ 19/16	▲ 19/15

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.67	0.73	0.58




OIL ANALYSIS REPORT

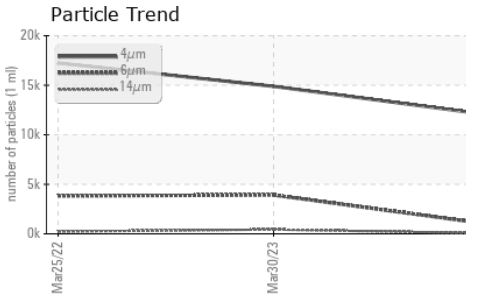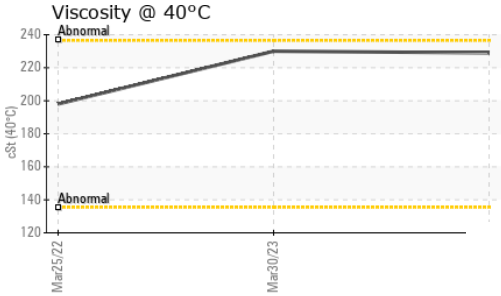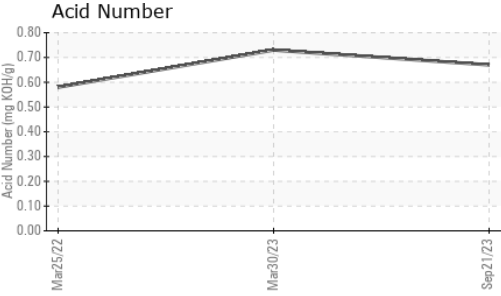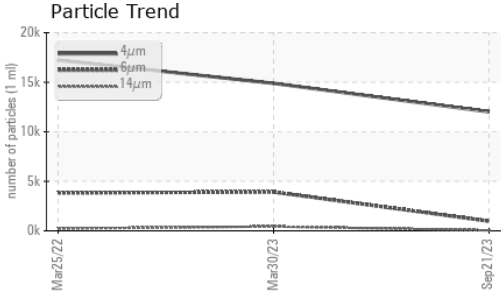






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	229	230	198

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

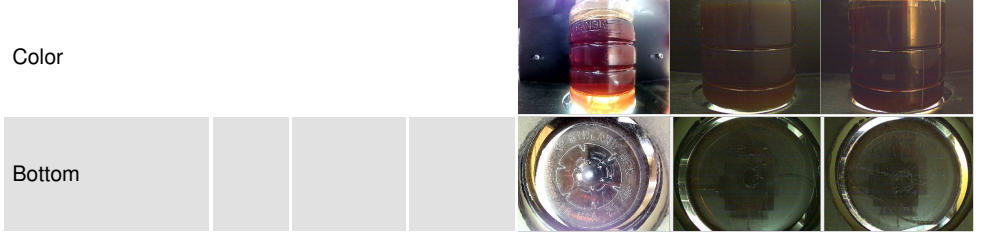

GRAPHS

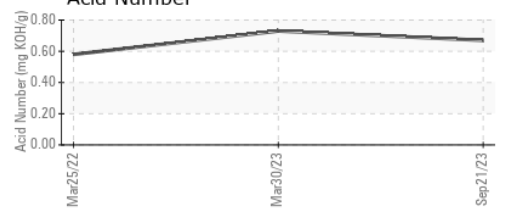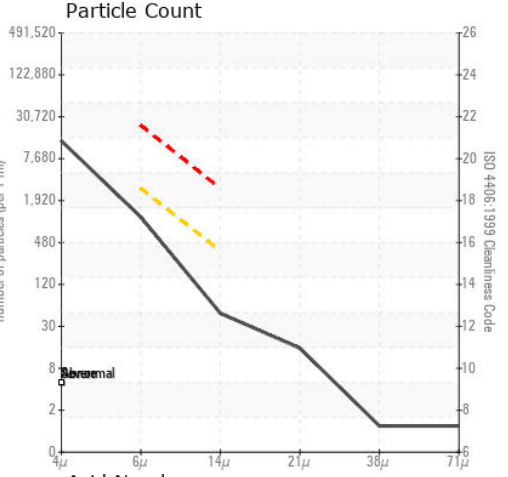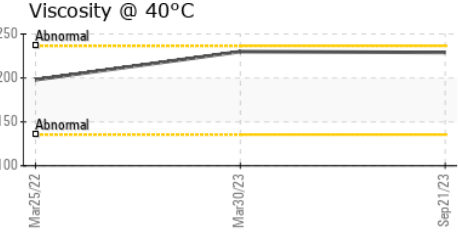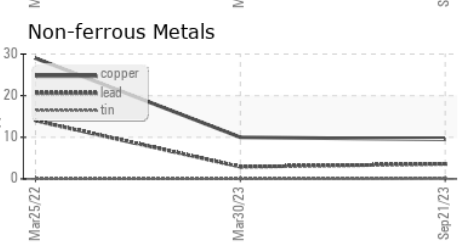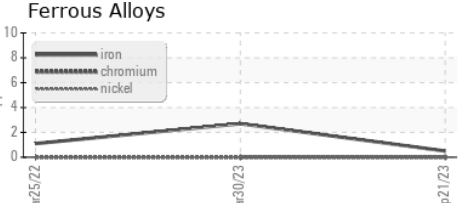

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012864 Received : 29 Sep 2023
 Lab Number : 05964559 Diagnosed : 02 Oct 2023
 Unique Number : 10671110 Diagnostician : Don Baldrige
 Test Package : MOB 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140
 Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com
 T: (526)622-1581 x:81
 F: x: