




# OIL ANALYSIS REPORT

Sample Rating Trend

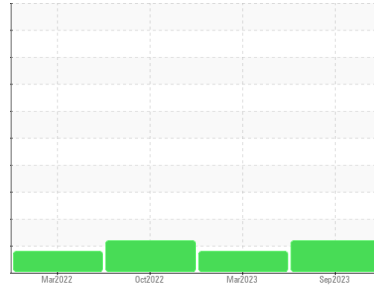

ISO



Area  
**GUAY SON [CONHER]**  
 Machine Id  
**MADE IN MEXICO IBACO BM NAUTICO 4**  
 Component  
**Transmission (Manual)**  
 Fluid  
**RALYO SAE 50 (60 LTR)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the fluid.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0012837</b>	KL0011369	KL0011206
Sample Date	Client Info		<b>20 Sep 2023</b>	15 Mar 2023	24 Oct 2022
Machine Age	hrs	Client Info	<b>16363</b>	12614	0
Oil Age	hrs	Client Info	<b>555</b>	545	0
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>13</b>	12	195
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >7	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	1	2
Lead	ppm	ASTM D5185m >45	<b>7</b>	7	7
Copper	ppm	ASTM D5185m >225	<b>9</b>	7	35
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m	<b>10</b>	5	9
Calcium	ppm	ASTM D5185m	<b>3552</b>	3414	3058
Phosphorus	ppm	ASTM D5185m	<b>1027</b>	963	875
Zinc	ppm	ASTM D5185m	<b>858</b>	843	751
Sulfur	ppm	ASTM D5185m	<b>5774</b>	5272	6373

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	<b>9</b>	8	9
Sodium	ppm	ASTM D5185m	<b>2</b>	0	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	2

## FLUID CLEANLINESS





	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>107050</b>	88888	228622
Particles >6µm	ASTM D7647	>2500	<b>▲ 29751</b>	▲ 14071	▲ 103277
Particles >14µm	ASTM D7647	>320	<b>▲ 495</b>	267	▲ 1692
Particles >21µm	ASTM D7647	>80	<b>48</b>	27	62
Particles >38µm	ASTM D7647	>20	<b>4</b>	1	2
Particles >71µm	ASTM D7647	>4	<b>2</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>18/15	<b>▲ 22/16</b>	▲ 21/15	▲ 24/18

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.70</b>	0.85	0.59




# OIL ANALYSIS REPORT

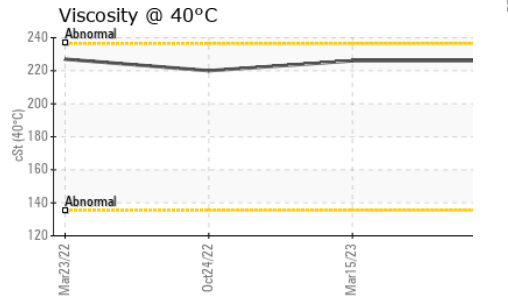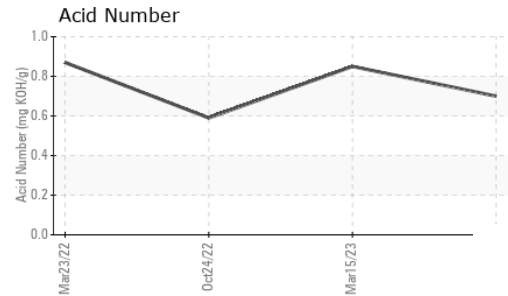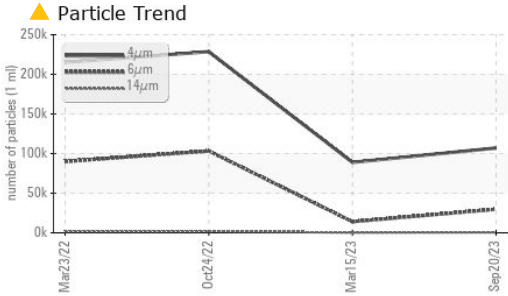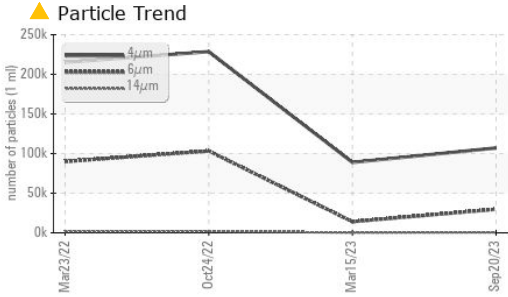






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	226	226	220

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

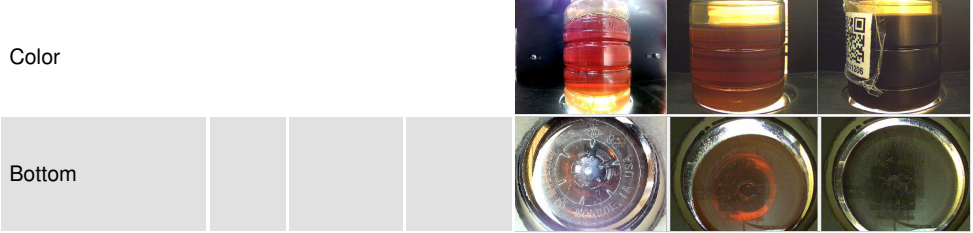

## GRAPHS

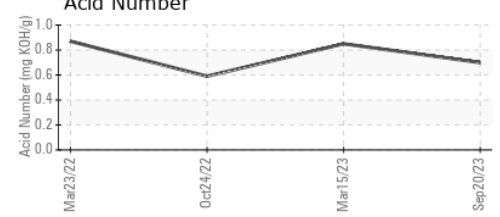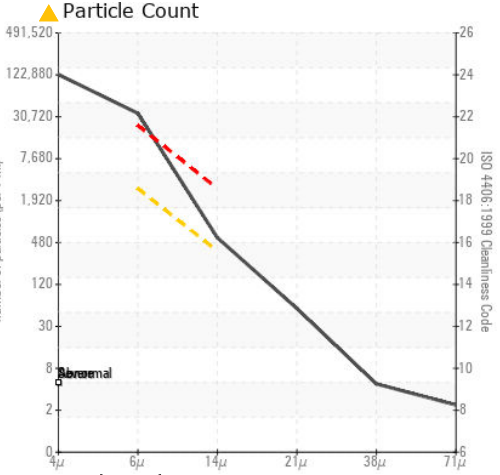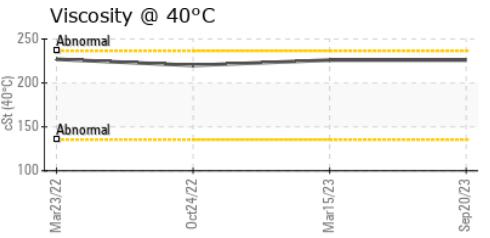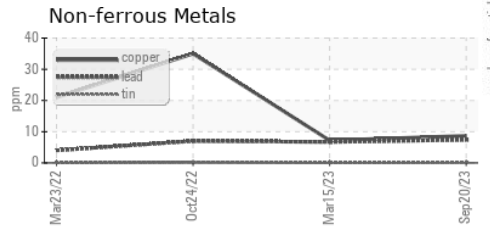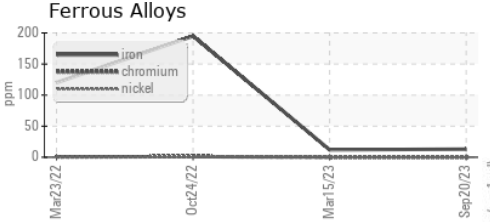

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0012837 **Received** : 29 Sep 2023  
**Lab Number** : 05964568 **Diagnosed** : 02 Oct 2023  
**Unique Number** : 10671119 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 2 ( Additional Tests: PrtCount )

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140  
 Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com  
 T: (526)622-1581 x:81  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)