

## **PROBLEM SUMMARY**


#### Area GP-105 [23508020] Machine Id

B40426 - PUMP VACUUM BUSCH RAU250 LINE 2 FORMING PUMP (S/N D13965)

Pump Fluid

### PETRO CANADA PURITY FG HYD AW 100 (5 GAL)

### COMPONENT CONDITION SUMMARY

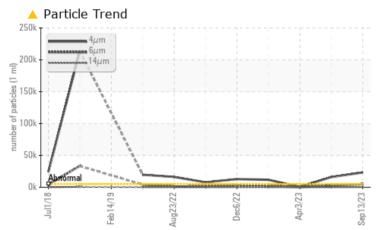

#### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Sample Ratin	ig Trend		ISO
			<b>A</b>
Jul2018 Feb2019	Aug2022 Dec2022	Apr2023 Sep2023	

PROBLEMATIC TEST RESULTS						
Sample Status		ABNORMAL	ABNORMAL	NORMAL		
Particles >4µm	ASTM D7647 >50	000 🔺 23276	▲ 16022	658		
Particles >6µm	ASTM D7647 >13	300 <b>🔺 4854</b>	<u> </u>	158		
Oil Cleanliness	ISO 4406 (c) >19	0/17/14 <b>A 22/19/14</b>	<b>A</b> 21/19/14	17/14/11		

Customer Id: HORAUS Sample No.: WC0842482 Lab Number: 05964577 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

#### HISTORICAL DIAGNOSIS

#### 19 Jul 2023 Diag: Don Baldridge



No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 03 Apr 2023 Diag: Angela Borella



No corrective act wear rates are no

No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





03 Feb 2023 Diag: Jonathan Hester

No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.






## **OIL ANALYSIS REPORT**

### GP-105 [23508020] B40426 - PUMP VACUUM BUSCH RAU250 LINE 2 FORMING PUMP (S/N D13965) Component

Pump

DIAGNOSIS


Fluid PETRO CANADA PURITY FG HYD AW 100 (5 GAL)

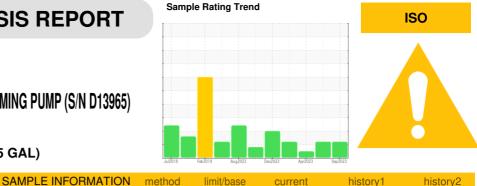



DIAGNOSIS	SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Recommendation	Sample Number		Client Info		WC0842482	WC0826110	WC0781453
No corrective action is recommended at this time.	Sample Date		Client Info		13 Sep 2023	19 Jul 2023	03 Apr 2023
Resample at the next service interval to monitor.	Machine Age	hrs	Client Info		0	0	0
/ear	Oil Age	hrs	Client Info		0	0	0
ll component wear rates are normal.	Oil Changed		Client Info		Not Changd	N/A	N/A
Contamination	Sample Status				ABNORMAL	ABNORMAL	NORMAL
here is a high amount of silt (particulates < 14 hicrons in size) present in the oil.	WEAR METALS		method	limit/base	current	history1	history2
uid Condition	Iron	ppm	ASTM D5185m	>90	3	3	0
e AN level is acceptable for this fluid. The	Chromium	ppm	ASTM D5185m	>5	0	0	0
ndition of the oil is suitable for further service.	Nickel	ppm	ASTM D5185m	>5	0	0	0
	Titanium	ppm	ASTM D5185m	>3	0	0	0
	Silver	ppm	ASTM D5185m		0	0	0
	Aluminum	ppm	ASTM D5185m		0	0	0
	Lead	ppm	ASTM D5185m		0	<1	0
	Copper	ppm	ASTM D5185m		0	<1	0
	Tin	ppm	ASTM D5185m		0	0	0
	Vanadium	ppm	ASTM D5185m	20	0	0	0
	Cadmium		ASTM D5185m		0	0	0
	Gaumum	ppm	ASTIVI DJIOJIII		0	0	0
	ADDITIVES		method	limit/base	current	history1	history2
	Boron	ppm	ASTM D5185m		0	0	0
	Barium	ppm	ASTM D5185m		0	2	0
	Molybdenum	ppm	ASTM D5185m		0	0	0
	Manganese	ppm	ASTM D5185m		0	0	0
	Magnesium	ppm	ASTM D5185m		3	<1	0
	Calcium	ppm	ASTM D5185m		3	1	0
	Phosphorus	ppm	ASTM D5185m		107	28	15
	Zinc	ppm	ASTM D5185m		5	0	2
	Sulfur	ppm	ASTM D5185m		280	72	0
	CONTAMINANTS		method	limit/base	current	history1	history2
	Silicon	ppm	ASTM D5185m	>60	11	13	<1
	Sodium	ppm	ASTM D5185m		2	0	0
	Potassium	ppm	ASTM D5185m	>20	2	2	<1
	FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
	Particles >4µm		ASTM D7647	>5000	<b>A</b> 23276	▲ 16022	658
	Particles >6µm		ASTM D7647	>1300	<u> </u>	<b>A</b> 2993	158
	Particles >14µm		ASTM D7647		121	94	16
	Particles >21µm		ASTM D7647	>40	18	21	4
	Particles >38µm		ASTM D7647		1	2	0
	Particles >71µm		ASTM D7647		0	1	0
	Oil Cleanliness		ISO 4406 (c)		<u> </u>	<b>2</b> 1/19/14	17/14/11
	FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	Acid Number (AN)		ASTM D8045		0.089	0.073	0.22
						0.07.0	·



# **OIL ANALYSIS REPORT**

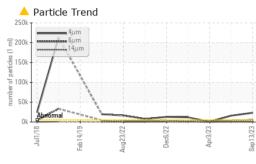


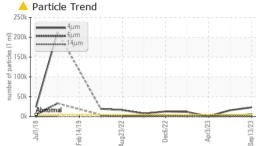

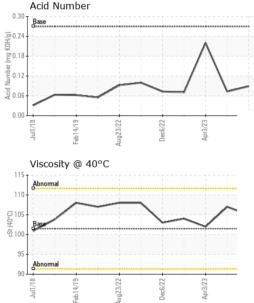


VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	101.5	105	107	102
SAMPLE IMAGES	S	method	limit/base	current	history1	history2

Color



Bottom

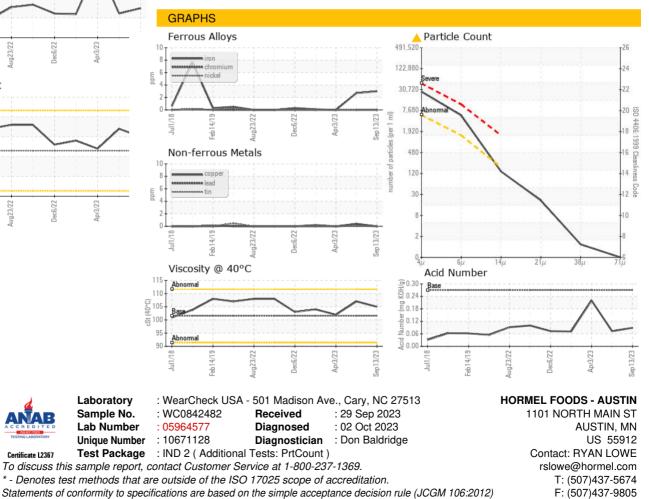

Contact/Location: RYAN LOWE - HORAUS