




# PROBLEM SUMMARY

Sample Rating Trend

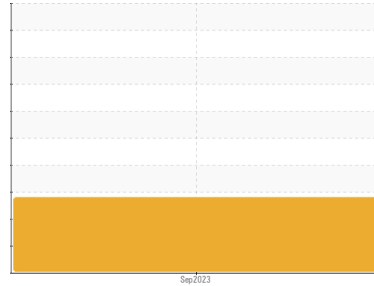

**WEAR**



Machine Id

**TRC**

Component


**Hydraulic System**

Fluid


**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## COMPONENT CONDITION SUMMARY


### ▲ Viscosity @ 40°C

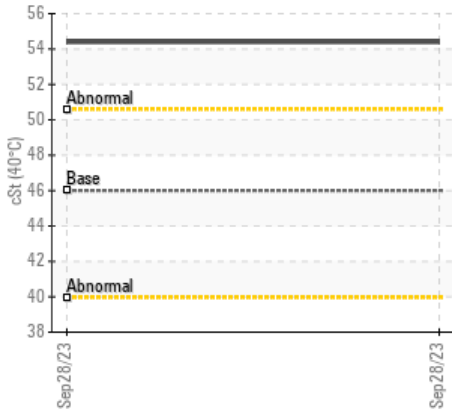

### ▲ Non-ferrous Metals

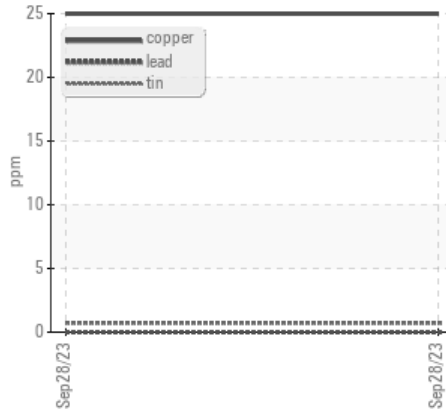

### ▲ Particle Trend

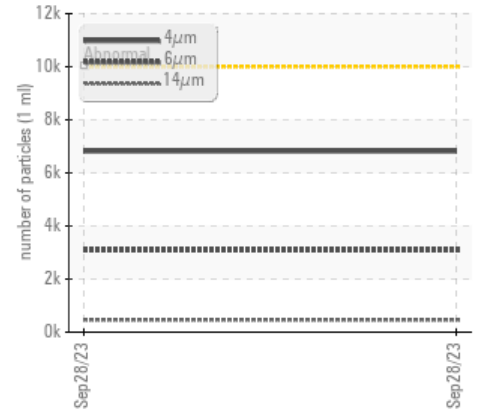

## RECOMMENDATION

No corrective action is recommended at this time.  
Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	---	---
Copper	ppm	ASTM D5185m	>20	▲ 25	---	---
Particles >6µm		ASTM D7647	>2500	▲ 3088	---	---
Particles >14µm		ASTM D7647	>320	▲ 461	---	---
Particles >21µm		ASTM D7647	>80	▲ 138	---	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	▲ 20/19/16	---	---
Visc @ 40°C	cSt	ASTM D445	46	▲ 54.4	---	---
PrtFilter					no image	no image

Customer Id: HYDWESLA

Sample No.: PH0001103

Lab Number: 05964585

Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:

Jonathan Hester +1 919-379-4092 x4092

[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:

Customer Service +1 1-800-237-1369

[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**



Machine Id

**TRC**

Component

**Hydraulic System**

Fluid

**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

The copper level is abnormal. All other component wear rates are normal.

### ▲ Contamination

There is a moderate amount of particulates present in the oil.

### ▲ Fluid Condition

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PH0001103</b>	---	---
Sample Date	Client Info		<b>28 Sep 2023</b>	---	---
Machine Age	yrs	Client Info	<b>10</b>	---	---
Oil Age	yrs	Client Info	<b>10</b>	---	---
Oil Changed	Client Info		<b>Not Changed</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>0</b>	---
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	---
Nickel	ppm	ASTM D5185m	>20	<b>0</b>	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---
Silver	ppm	ASTM D5185m		<b>0</b>	---
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	---
Lead	ppm	ASTM D5185m	>20	<b>0</b>	---
Copper	ppm	ASTM D5185m	>20	<b>▲ 25</b>	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	<b>0</b>	---
Barium	ppm	ASTM D5185m	5	<b>0</b>	---
Molybdenum	ppm	ASTM D5185m	5	<b>0</b>	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---
Magnesium	ppm	ASTM D5185m	25	<b>83</b>	---
Calcium	ppm	ASTM D5185m	200	<b>63</b>	---
Phosphorus	ppm	ASTM D5185m	300	<b>292</b>	---
Zinc	ppm	ASTM D5185m	370	<b>370</b>	---
Sulfur	ppm	ASTM D5185m	2500	<b>1907</b>	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>0</b>	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---


## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	<b>6816</b>	---	---
Particles >6µm	ASTM D7647	>2500	<b>▲ 3088</b>	---	---
Particles >14µm	ASTM D7647	>320	<b>▲ 461</b>	---	---
Particles >21µm	ASTM D7647	>80	<b>▲ 138</b>	---	---
Particles >38µm	ASTM D7647	>20	<b>4</b>	---	---
Particles >71µm	ASTM D7647	>4	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<b>▲ 20/19/16</b>	---	---

## FLUID DEGRADATION






	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.31</b>	---

Particle Filter (Magn: 200 x)

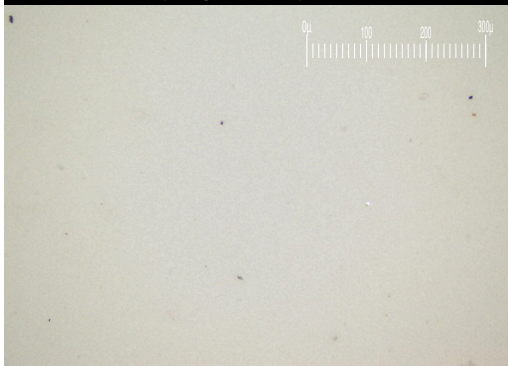



# OIL ANALYSIS REPORT

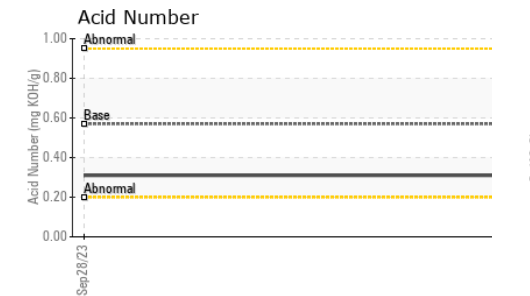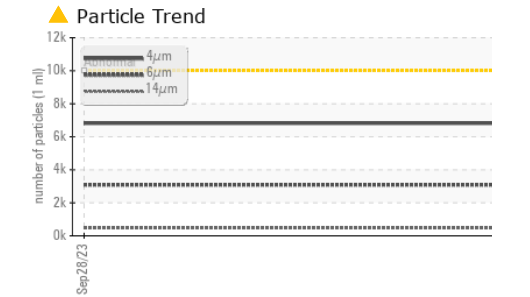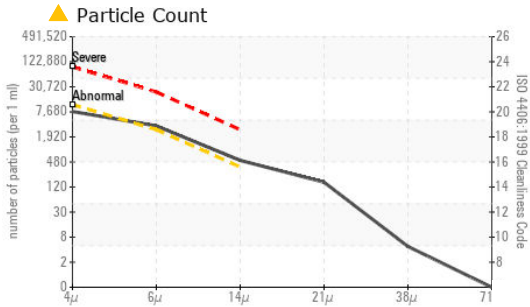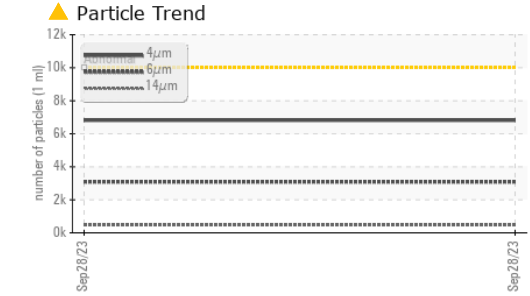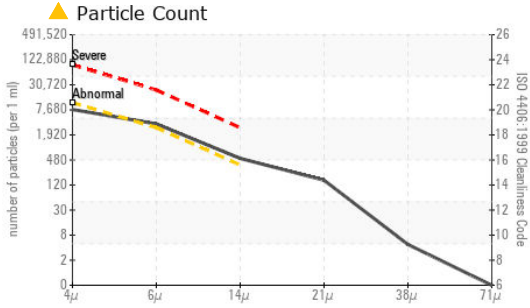

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PH0001103 **Received** : 29 Sep 2023  
**Lab Number** : 05964585 **Diagnosed** : 05 Oct 2023  
**Unique Number** : 10671136 **Diagnostician** : Jonathan Hester  
**Test Package** : PLANT ( Additional Tests: PrtFilter )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	▲ 54.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					
PrtFilter					

## GRAPHS

