

# **OIL ANALYSIS REPORT**

# RI

Sample Rating Trend

NORMAL



Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

### DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


## **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Mar2020	NovŹ020 JunŻ021	Nov2021 Nov2022	Sep2023	
SAMPLE INFORM	<b>/</b> ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC111011	KC108413	KC96306
Sample Date		Client Info		14 Sep 2023	22 Nov 2022	23 Nov 2021
Machine Age	hrs	Client Info		28446	22327	18612
Oil Age	hrs	Client Info		6000	5500	3000
Oil Changed		Client Info		Changed	Changed	Not Changd
Sample Status				NORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	2
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	2	0
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m		1	9	10
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m	~ 10			0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium		ASTM D5185m		0	0	0
ADDITIVES	ppm		limit/bases			-
		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	00	0	0	1
Barium	ppm	ASTM D5185m	90	<1	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	4	0	2
Calcium	ppm	ASTM D5185m	2	2	0	0
Phosphorus	ppm	ASTM D5185m		2	3	6
Zinc	ppm	ASTM D5185m		5	17	18
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	<1
Sodium	ppm	ASTM D5185m		0	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.05	0.006	0.031	0.005
ppm Water	ppm	ASTM D6304	>500	60.4	313.2	50.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		953	10961	
Particles >6µm		ASTM D7647	>1300	254	<b>A</b> 2672	
Particles >14µm		ASTM D7647	>80	35	<b>1</b> 47	
Particles >21µm		ASTM D7647	>20	10	<b>A</b> 37	
Particles >38µm		ASTM D7647	>4	1	1	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)		17/15/12	<b>A</b> 21/19/14	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.46	0.38	0.433
. ,	- 0					



**OIL ANALYSIS REPORT** 

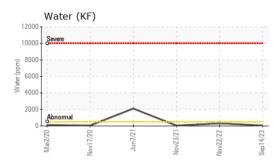


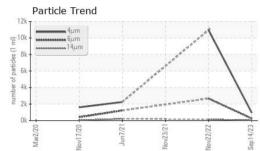

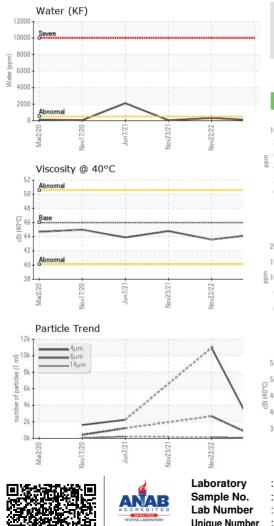

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	A MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.3	43.6	44.8
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						

Bottom

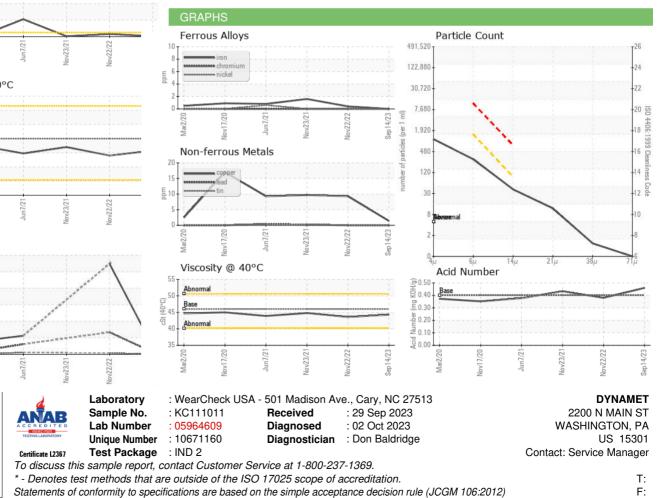

Contact/Location: Service Manager - DYNWAS