


### **PROBLEM SUMMARY**

# KAESER SFC 75ST 4575180 (S/N 1009)

Compressor Fluid

### KAESER SIGMA (OEM) S-460 (--- GAL)

#### COMPONENT CONDITION SUMMARY

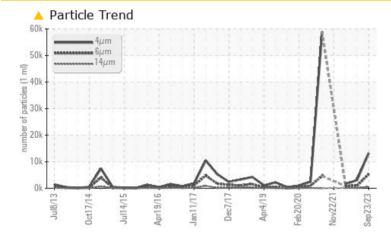

#### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### **PROBLEMATIC TEST RESULTS** Sample Status ABNORMAL **ATTENTION** ABNORMAL Particles >6µm ASTM D7647 >1300 5326 964 795 Particles >14µm ASTM D7647 >80 649 A 95 **1**35 Particles >21µm ASTM D7647 >20 114 30 **4**6 **Oil Cleanliness** ISO 4406 (c) >--/17/13 **A** 21/20/16 ▲ 19/17/14 ▲ 18/17/14


Customer Id: MODALI Sample No.: KC124511 Lab Number: 05964610 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 don.b505@comcast.net

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

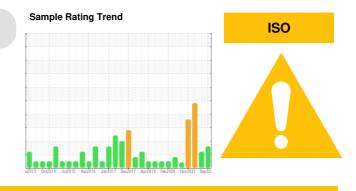

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

#### **HISTORICAL DIAGNOSIS**

#### 09 Jun 2023 Diag: Don Baldridge



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

#### 14 Oct 2022 Diag: Don Baldridge

The filter change at the time of sampling has been noted. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.All component wear rates are normal. There is a moderate amount of particulates present in the oil. There is a light concentration of water present in the oil. Free water present. The AN level is acceptable for this fluid.



view report



#### 22 Nov 2021 Diag: Jonathan Hester

We advise that you stop the unit and follow the water drain-off procedure for this component. The filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Free water present. There is a light concentration of water present in the oil. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





Report Id: MODALI [WUSCAR] 05964610 (Generated: 10/02/2023 11:25:47) Rev: 1



### **OIL ANALYSIS REPORT**

#### Machine Id KAESER SFC 75ST 4575180 (S/N 1009) Component

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

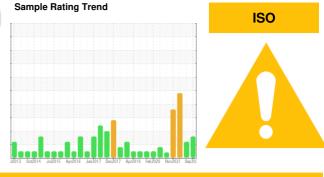



SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC124511	KC102061	KC85887
Sample Date		Client Info		23 Sep 2023	09 Jun 2023	14 Oct 2022
Machine Age	hrs	Client Info		13762	72316	67208
Oil Age	hrs	Client Info		0	5000	3000
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				ABNORMAL	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		0	<1	3
Lead	ppm	ASTM D5185m		0	0	0
Copper	ppm	ASTM D5185m		2	5	4
Tin	ppm	ASTM D5185m		0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	PPIII		11			
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	2	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	90	3	<1	15
Calcium	ppm	ASTM D5185m	2	2	0	0
Phosphorus	ppm	ASTM D5185m		2	<1	0
Zinc	ppm	ASTM D5185m		5	<1	21
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		0	0	4
Potassium	ppm	ASTM D5185m	>20	0	0	3
Water	%	ASTM D6304	>0.05	0.007	0.006	▲ 0.253
ppm Water	ppm	ASTM D6304	>500	75.0	66.1	<b>2</b> 530
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		13206	3097	1459
Particles >6µm		ASTM D7647	>1300	<u> </u>	964	795
Particles >14µm		ASTM D7647	>80	<u> </u>	<b>4</b> 95	<b>1</b> 35
Particles >21µm		ASTM D7647	>20	🔺 114	<b>A</b> 30	<b>4</b> 6
Particles >38µm		ASTM D7647	>4	2	2	<b></b> 7
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 21/20/16	▲ 19/17/14	▲ 18/17/14
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.46	0.50	0.40
	÷ 0					



## **OIL ANALYSIS REPORT**

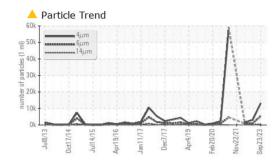

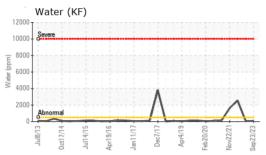

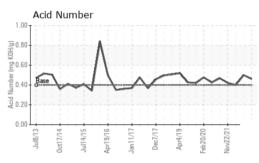

Water (KF)

Abnorma

Viscosity @ 40°C

1200

10000

4000

200

52

50

48 (0-01) 440°C)

42


3

Abnon 40


Water (ppm) 600

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	▲ 0.2%
Free Water	scalar	*Visual		NEG	NEG	<b>▲</b> 1.0
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.6	44.3	44.2
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



Bottom

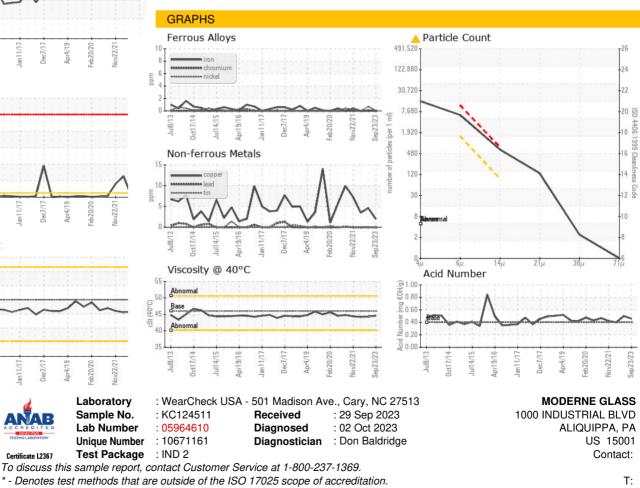

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ? ? - MODALI Page 4 of 4