


# **PROBLEM SUMMARY**

# KAESER AS 30T 7330001 (S/N 1496)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

# COMPONENT CONDITION SUMMARY

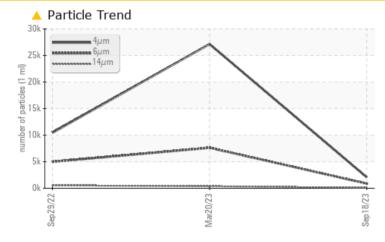

### RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS |              |         |                 |              |                 |  |  |
|--------------------------|--------------|---------|-----------------|--------------|-----------------|--|--|
| Sample Status            |              |         | ATTENTION       | ABNORMAL     | ABNORMAL        |  |  |
| Particles >14µm          | ASTM D7647   | >80     | <u> </u>        | <b>A</b> 380 | <b>5</b> 47     |  |  |
| Oil Cleanliness          | ISO 4406 (c) | >/17/13 | <b>18/17/14</b> | ▲ 22/20/16   | <b>1</b> /19/16 |  |  |


Customer Id: MONAMS Sample No.: KC124518 Lab Number: 05964620 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

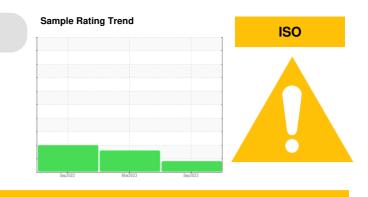

#### **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

### HISTORICAL DIAGNOSIS

### 20 Mar 2023 Diag: Doug Bogart

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 29 Sep 2022 Diag: Jonathan Hester

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Report Id: MONAMS [WUSCAR] 05964620 (Generated: 10/02/2023 11:13:40) Rev: 1



# **OIL ANALYSIS REPORT**

# KAESER AS 30T 7330001 (S/N 1496)

**Compressor** Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## Wear


All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





| SAMPLE INFORM    | ATION    | method       | limit/base | current           | history1      | history2     |
|------------------|----------|--------------|------------|-------------------|---------------|--------------|
| Sample Number    |          | Client Info  |            | KC124518          | KC101510      | KC105547     |
| Sample Date      |          | Client Info  |            | 18 Sep 2023       | 20 Mar 2023   | 29 Sep 2022  |
| Machine Age      | hrs      | Client Info  |            | 14764             | 11752         | 9037         |
| Oil Age          | hrs      | Client Info  |            | 0                 | 2500          | 6000         |
| Oil Changed      |          | Client Info  |            | N/A               | Not Changd    | Changed      |
| Sample Status    |          |              |            | ATTENTION         | ABNORMAL      | ABNORMAL     |
| WEAR METALS      |          | method       | limit/base | current           | history1      | history2     |
| Iron             | ppm      | ASTM D5185m  | >50        | 0                 | <1            | 0            |
| Chromium         | ppm      | ASTM D5185m  | >10        | 0                 | 0             | 0            |
| Nickel           | ppm      | ASTM D5185m  | >3         | 0                 | <1            | 0            |
| Titanium         | ppm      | ASTM D5185m  | >3         | 0                 | 0             | 0            |
| Silver           | ppm      | ASTM D5185m  | >2         | 0                 | 0             | <1           |
| Aluminum         | ppm      | ASTM D5185m  | >10        | 0                 | 1             | <1           |
| Lead             | ppm      | ASTM D5185m  | >10        | 0                 | <1            | 0            |
| Copper           | ppm      | ASTM D5185m  | >50        | 9                 | 6             | 10           |
| Tin              | ppm      | ASTM D5185m  | >10        | 0                 | <1            | 0            |
| Vanadium         | ppm      | ASTM D5185m  |            | 0                 | 0             | 0            |
| Cadmium          | ppm      | ASTM D5185m  |            | 0                 | 0             | 0            |
| ADDITIVES        |          | method       | limit/base | current           | history1      | history2     |
| Boron            | ppm      | ASTM D5185m  |            | 0                 | 0             | 0            |
| Barium           | ppm      | ASTM D5185m  | 90         | 0                 | 25            | 0            |
| Molybdenum       | ppm      | ASTM D5185m  |            | 0                 | 0             | 0            |
| Manganese        | ppm      | ASTM D5185m  |            | 0                 | 0             | 0            |
| Magnesium        | ppm      | ASTM D5185m  | 90         | 4                 | 41            | 10           |
| Calcium          | ppm      | ASTM D5185m  | 2          | 2                 | 1             | 0            |
| Phosphorus       | ppm      | ASTM D5185m  |            | 3                 | 16            | 12           |
| Zinc             | ppm      | ASTM D5185m  |            | 9                 | 6             | 5            |
| CONTAMINANTS     |          | method       | limit/base | current           | history1      | history2     |
| Silicon          | ppm      | ASTM D5185m  | >25        | 0                 | 2             | 0            |
| Sodium           | ppm      | ASTM D5185m  |            | <1                | 17            | 4            |
| Potassium        | ppm      | ASTM D5185m  | >20        | 0                 | 10            | 4            |
| Water            | %        | ASTM D6304   | >0.05      | 0.007             | 0.013         | 0.006        |
| ppm Water        | ppm      | ASTM D6304   | >500       | 71.0              | 133.5         | 68.9         |
| FLUID CLEANLIN   | IESS     | method       | limit/base | current           | history1      | history2     |
| Particles >4µm   |          | ASTM D7647   |            | 2078              | 27147         | 10452        |
| Particles >6µm   |          | ASTM D7647   |            | 876               | <u>∧</u> 7631 | <b>4</b> 990 |
| Particles >14µm  |          | ASTM D7647   | >80        | <mark>/</mark> 84 | <b>A</b> 380  | <b>5</b> 47  |
| Particles >21µm  |          | ASTM D7647   |            | 20                | <b>9</b> 1    | <b>1</b> 06  |
| Particles >38µm  |          | ASTM D7647   | >4         | 1                 | 2             | <u> </u>     |
| Particles >71µm  |          | ASTM D7647   |            | 0                 | 0             | 0            |
| Oil Cleanliness  |          | ISO 4406 (c) | >/17/13    | <b>18/17/14</b>   | 22/20/16      | ▲ 21/19/16   |
| FLUID DEGRADA    | TION     | method       | limit/base | current           | history1      | history2     |
| Acid Number (AN) | mg KOH/g | ASTM D8045   | 0.4        | 0.33              | 0.37          | 0.29         |



# **OIL ANALYSIS REPORT**






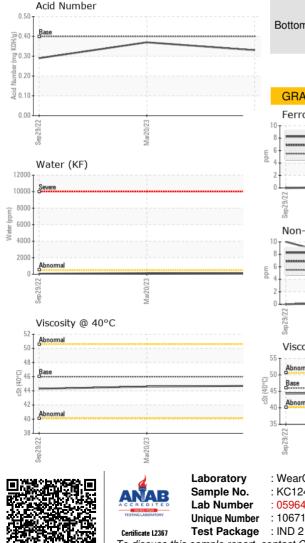

| VISUAL           |        | method    | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual   | NONE       | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual   | NORML      | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual   | >0.05      | NEG     | NEG      | NEG      |
| Free Water       | scalar | *Visual   |            | NEG     | NEG      | NEG      |
| FLUID PROPERT    | IES    | method    | limit/base | current | history1 | history2 |
| Visc @ 40°C      | cSt    | ASTM D445 | 46         | 44.7    | 44.6     | 44.3     |
| SAMPLE IMAGES    | S      | method    | limit/base | current | history1 | history2 |
| Color            |        |           |            |         |          |          |



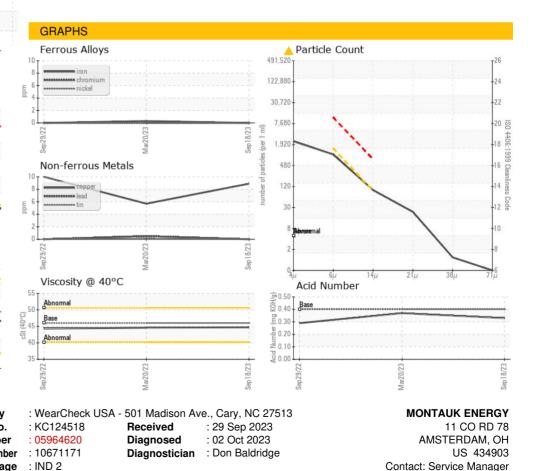

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - MONAMS

T:

F: