




PROBLEM SUMMARY

Sample Rating Trend

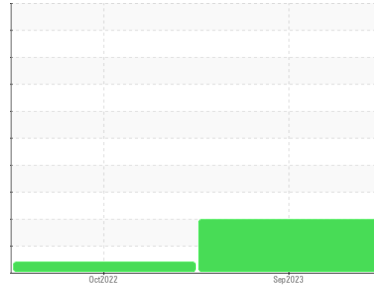

Machine Id
KAESER AS30T 7290798 (S/N 1484)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend



RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | ASTM D7647 | Limit | ABNORMAL | ABNORMAL | --- |
|-----------------|--------------|-----------|------------|----------|-----|
| Particles >6µm | ASTM D7647 | >1300 | ▲ 10075 | --- | --- |
| Particles >14µm | ASTM D7647 | >80 | ▲ 1321 | --- | --- |
| Particles >21µm | ASTM D7647 | >20 | ▲ 391 | --- | --- |
| Particles >38µm | ASTM D7647 | >4 | ▲ 16 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >--/17/13 | ▲ 22/21/18 | --- | --- |

Customer Id: DYNWAS
 Sample No.: KC110812
 Lab Number: 05964625
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|---------------|--------|------|---------|---|
| Change Fluid | --- | --- | ? | Oil and filter change at the time of sampling has been noted. |
| Change Filter | --- | --- | ? | Oil and filter change at the time of sampling has been noted. |

HISTORICAL DIAGNOSIS

18 Oct 2022 Diag: Don Baldrige

VIS DEBRIS



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

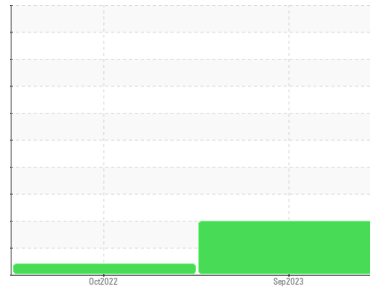

ISO



Machine Id
KAESER AS30T 7290798 (S/N 1484)

Component
Compressor
Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|----------|
| Sample Number | Client Info | | KC110812 | KC85846 | --- |
| Sample Date | Client Info | | 19 Sep 2023 | 18 Oct 2022 | --- |
| Machine Age | hrs | Client Info | 9855 | 6985 | --- |
| Oil Age | hrs | Client Info | 6000 | 3085 | --- |
| Oil Changed | Client Info | | Changed | Not Changd | --- |
| Sample Status | | | ABNORMAL | ABNORMAL | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >50 | 0 | <1 | --- |
| Chromium | ppm | ASTM D5185m >10 | 0 | 0 | --- |
| Nickel | ppm | ASTM D5185m >3 | 0 | 0 | --- |
| Titanium | ppm | ASTM D5185m >3 | 0 | 0 | --- |
| Silver | ppm | ASTM D5185m >2 | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m >10 | <1 | <1 | --- |
| Lead | ppm | ASTM D5185m >10 | 0 | <1 | --- |
| Copper | ppm | ASTM D5185m >50 | 8 | 7 | --- |
| Tin | ppm | ASTM D5185m >10 | 0 | 0 | --- |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | --- |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|----------------|-----------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | 0 | --- |
| Barium | ppm | ASTM D5185m 90 | 2 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | --- |
| Manganese | ppm | ASTM D5185m | 0 | <1 | --- |
| Magnesium | ppm | ASTM D5185m 90 | 29 | 46 | --- |
| Calcium | ppm | ASTM D5185m 2 | 3 | 0 | --- |
| Phosphorus | ppm | ASTM D5185m | 3 | 0 | --- |
| Zinc | ppm | ASTM D5185m | 13 | 1 | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | <1 | 2 | --- |
| Sodium | ppm | ASTM D5185m | 10 | 15 | --- |
| Potassium | ppm | ASTM D5185m >20 | 2 | 5 | --- |
| Water | % | ASTM D6304 >0.05 | 0.012 | 0.017 | --- |
| ppm Water | ppm | ASTM D6304 >500 | 120.8 | 178.6 | --- |






FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-------------------|----------|----------|
| Particles >4µm | ASTM D7647 | | 23489 | --- | --- |
| Particles >6µm | ASTM D7647 | >1300 | ▲ 10075 | --- | --- |
| Particles >14µm | ASTM D7647 | >80 | ▲ 1321 | --- | --- |
| Particles >21µm | ASTM D7647 | >20 | ▲ 391 | --- | --- |
| Particles >38µm | ASTM D7647 | >4 | ▲ 16 | --- | --- |
| Particles >71µm | ASTM D7647 | >3 | 1 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >--/17/13 | ▲ 22/21/18 | --- | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.4 | 0.27 | 0.32 | --- |


OIL ANALYSIS REPORT

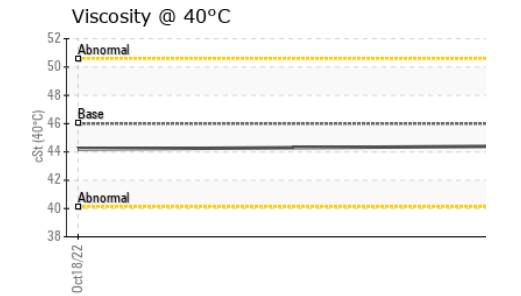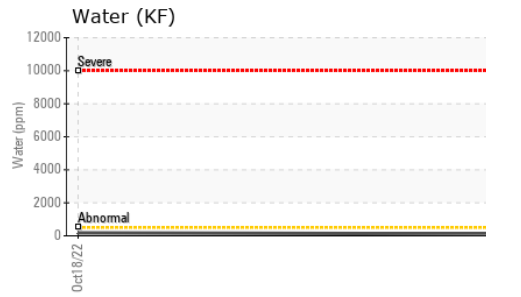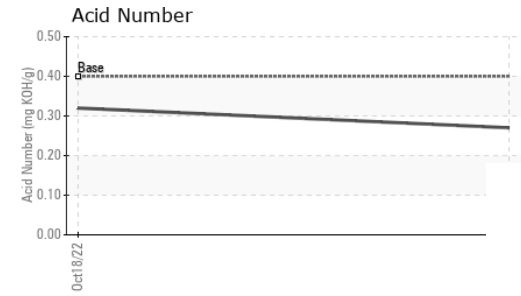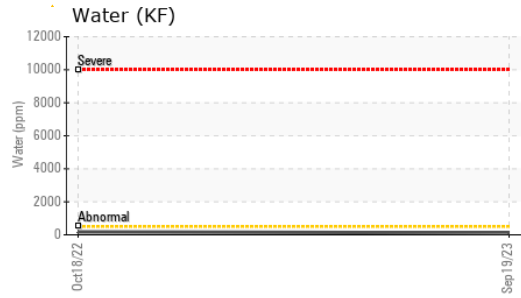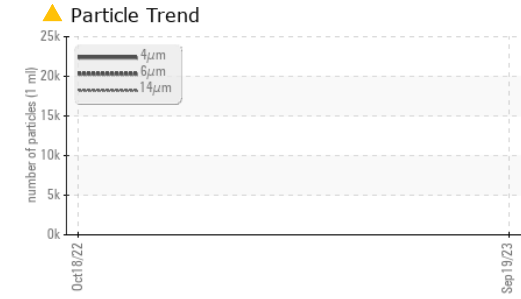






| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|--------------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | LIGHT | ▲ MODER |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|--------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 46 | 44.4 | 44.2 | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

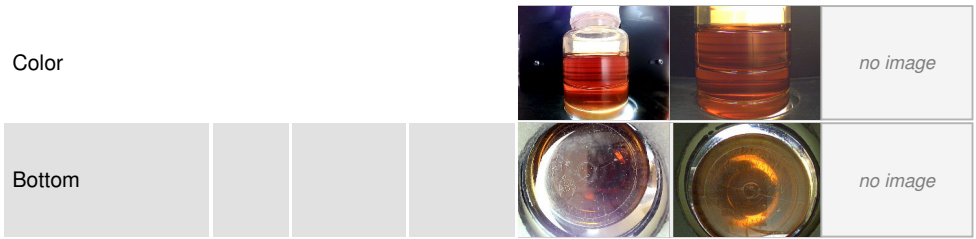

GRAPHS

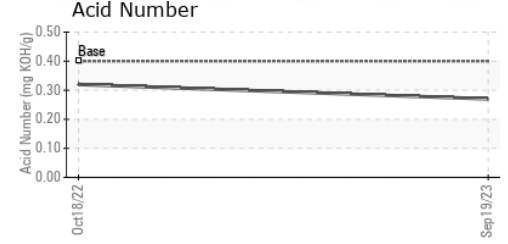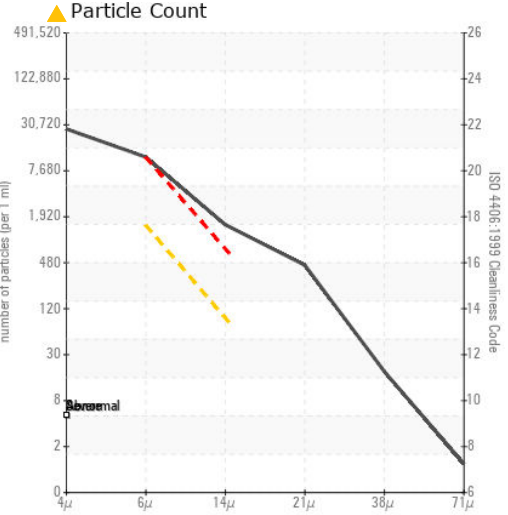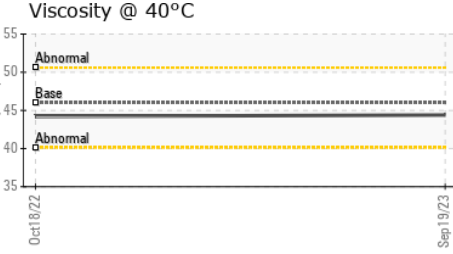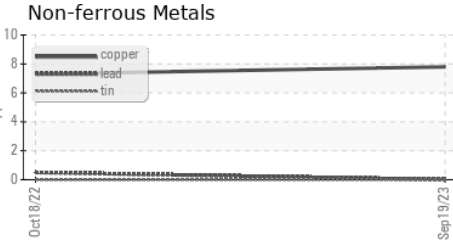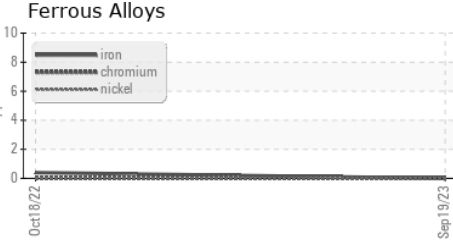

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC110812 **Received** : 29 Sep 2023
Lab Number : 05964625 **Diagnosed** : 02 Oct 2023
Unique Number : 10671176 **Diagnostician** : Don Baldrige
Test Package : IND 2

DYNAMET
 2200 N MAIN ST
 WASHINGTON, PA
 US 15301
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: