




OIL ANALYSIS REPORT

Sample Rating Trend

DIRT



Area
HER SON [CONHER]
 Machine Id
INTERNATIONAL Fletquim - International #2
 Component
Diesel Engine
 Fluid
FLEETRITE CI4 PLUS 15W40 (35 LTR)

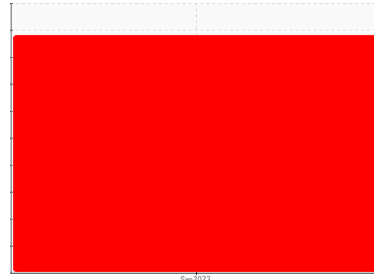

DIAGNOSIS

Recommendation

We advise that you check all areas where dirt can enter the system. We recommend you service the filters on this component. Resample at the next service interval to monitor. (Customer Sample Comment: Fluid brand= fleetrite CI4 plus 15W-40)

Wear

The iron level is abnormal. All other component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012834	---	---
Sample Date	Client Info		18 Sep 2023	---	---
Machine Age	kms	Client Info	428277	---	---
Oil Age	kms	Client Info	10000	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			SEVERE	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<1.0	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	▲ 125	---	---
Chromium	ppm	ASTM D5185m >20	9	---	---
Nickel	ppm	ASTM D5185m >4	<1	---	---
Titanium	ppm	ASTM D5185m	1	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >20	▲ 28	---	---
Lead	ppm	ASTM D5185m >40	0	---	---
Copper	ppm	ASTM D5185m >330	<1	---	---
Tin	ppm	ASTM D5185m >15	1	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	248	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	67	---	---
Manganese	ppm	ASTM D5185m	2	---	---
Magnesium	ppm	ASTM D5185m	250	---	---
Calcium	ppm	ASTM D5185m	2180	---	---
Phosphorus	ppm	ASTM D5185m	1001	---	---
Zinc	ppm	ASTM D5185m	1251	---	---
Sulfur	ppm	ASTM D5185m	3632	---	---

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	◆ 93	---	---
Sodium	ppm	ASTM D5185m	9	---	---
Potassium	ppm	ASTM D5185m >20	8	---	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.6	---	---
Nitration	Abs/cm	*ASTM D7624 >20	7.4	---	---
Sulfation	Abs./1mm	*ASTM D7415 >30	20.7	---	---



OIL ANALYSIS REPORT

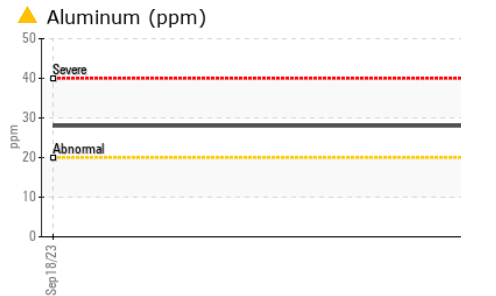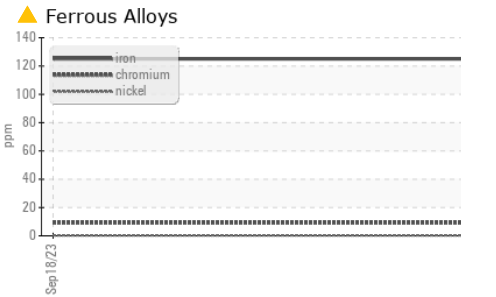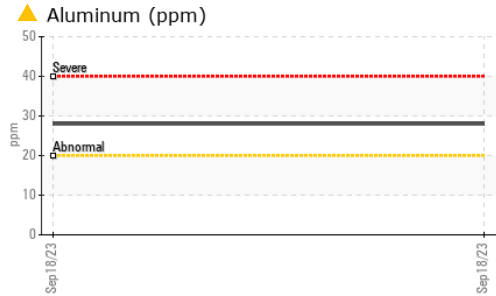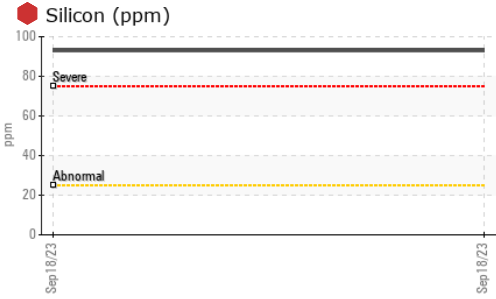




FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		46795	---	---
Particles >6µm	ASTM D7647	>5000	25492	---	---
Particles >14µm	ASTM D7647	>640	4338	---	---
Particles >21µm	ASTM D7647	>160	1461	---	---
Particles >38µm	ASTM D7647	>40	226	---	---
Particles >71µm	ASTM D7647	>10	23	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16	22/19	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	13.1	---	---
Base Number (BN)	mg KOH/g ASTM D2896		9.12	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	---	---
Yellow Metal	scalar *Visual	NONE	NONE	---	---
Precipitate	scalar *Visual	NONE	NONE	---	---
Silt	scalar *Visual	NONE	NONE	---	---
Debris	scalar *Visual	NONE	NONE	---	---
Sand/Dirt	scalar *Visual	NONE	NONE	---	---
Appearance	scalar *Visual	NORML	NORML	---	---
Odor	scalar *Visual	NORML	NORML	---	---
Emulsified Water	scalar *Visual	>0.2	NEG	---	---
Free Water	scalar *Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		13.0	---	---

GRAPHS

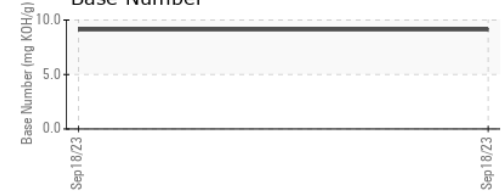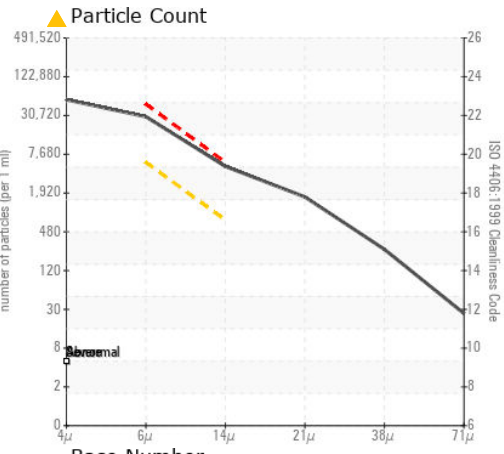

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0012834 **Received** : 29 Sep 2023
Lab Number : 05964783 **Diagnosed** : 03 Oct 2023
Unique Number : 10671334 **Diagnostician** : Angela Borella
Test Package : MOB 2 (Additional Tests: PrtCount)

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140
 Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com
 T: (526)622-1581 x:81
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)