

OIL ANALYSIS REPORT

HER SON [CONHER] Machine Id INTERNATIONAL Fletquim - International #27 Component

Diesel Engine

FLEETRITE CI4 PLUS 15W40 (35 LTR)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. (Customer Sample Comment: Fluid brand= Fleetrite CI-4 plus 15W-40)

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

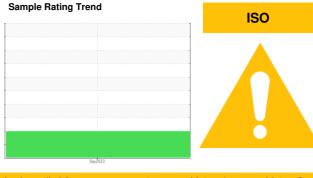



SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KL0012832		
Sample Date		Client Info		18 Sep 2023		
Machine Age	kms	Client Info		397381		
Oil Age	kms	Client Info		13459		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
CONTAMINATION	١	method	limit/base	current	history1	history2
Fuel		WC Method	>2.0	<1.0		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	19		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	4		
Lead	ppm	ASTM D5185m	>40	<1		
Copper	ppm	ASTM D5185m	>330	<1		
Tin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		71		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		41		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		64		
Calcium	ppm	ASTM D5185m		3125		
Phosphorus	ppm	ASTM D5185m		887		
Zinc	ppm	ASTM D5185m		1101		
Sulfur	ppm	ASTM D5185m		3329		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	11		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	0		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5		
Nitration	Abs/cm	*ASTM D7624	>20	7.7		
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0		




OIL ANALYSIS REPORT

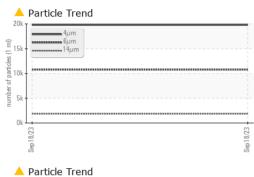

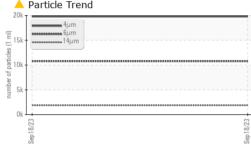


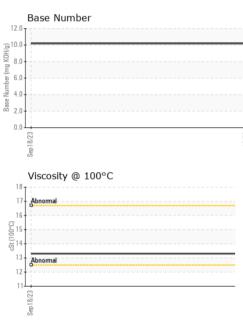


FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647		19783				
Particles >6µm		ASTM D7647	>5000	<u> </u>				
Particles >14µm		ASTM D7647	>640	1834				
Particles >21µm		ASTM D7647	>160	<u> </u>				
Particles >38µm		ASTM D7647	>40	<mark>/</mark> 95				
Particles >71µm		ASTM D7647	>10	10				
Oil Cleanliness		ISO 4406 (c)	>19/16	 21/18				
FLUID DEGRADA	TION	method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.9				
Base Number (BN)	mg KOH/g	ASTM D2896		10.19				
VISUAL		method	limit/base	current	history1	history2		
White Metal	scalar	*Visual	NONE	NONE				
Yellow Metal	scalar	*Visual	NONE	NONE				
Precipitate	scalar	*Visual	NONE	NONE				
Silt	scalar	*Visual	NONE	NONE				
Debris	scalar	*Visual	NONE	NONE				
Sand/Dirt	scalar	*Visual	NONE	NONE				
Appearance	scalar	*Visual	NORML	NORML				
Odor	scalar	*Visual	NORML	NORML				
Emulsified Water	scalar	*Visual	>0.2	NEG				
Free Water	scalar	*Visual		NEG				
FLUID PROPERT	IES	method	limit/base	current	history1	history2		
Visc @ 100°C	cSt	ASTM D445		13.3				
GRAPHS								
Ferrous Alloys	Particle Count							

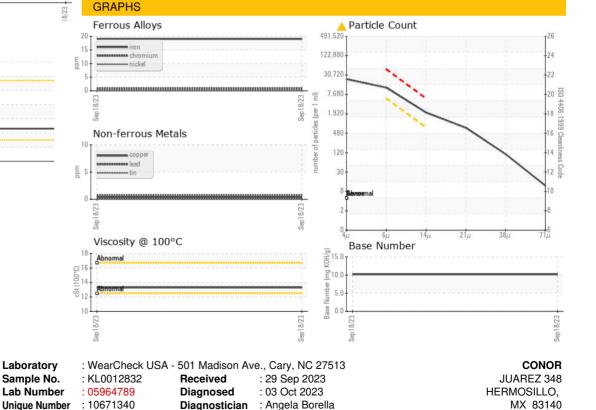

Test Package : MOB 2 (Additional Tests: PrtCount) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)





Submitted By: EDUARDO GARCIA