


# **OIL ANALYSIS REPORT**

# HER SON [CONHER] INTERNATIONAL Fletquim - International #26

**Diesel Engine** 

FLEETRITE CI4 PLUS 15W40 (35 LTR)





## **DIAGNOSIS**

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: Fluid brand= fleetrite CI4 plus 15W-40)

#### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.


#### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

				Sep2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KL0012833		
Sample Date		Client Info		18 Sep 2023		
Machine Age	kms	Client Info		507258		
Oil Age	kms	Client Info		3569		
Oil Changed		Client Info		Not Changd		
Sample Status				ATTENTION		
CONTAMINATION	V	method	limit/base	current	history1	history2
Fuel		WC Method	>2.0	<1.0		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	7		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	3		
Lead	ppm	ASTM D5185m	>40	<1		
Copper	ppm	ASTM D5185m	>330	<1		
Tin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		87		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		39		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		52		
Calcium	ppm	ASTM D5185m		3096		
Phosphorus	ppm	ASTM D5185m		888		
Zinc	ppm	ASTM D5185m		1076		
Sulfur	ppm	ASTM D5185m		3294		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm	ASTM D5185m	>20	0		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2		
Nitration	Abs/cm	*ASTM D7624	>20	5.9		
Sulfation	Abs/.1mm	*ASTM D7415	>30	15.3		



# OIL ANALYSIS REPORT

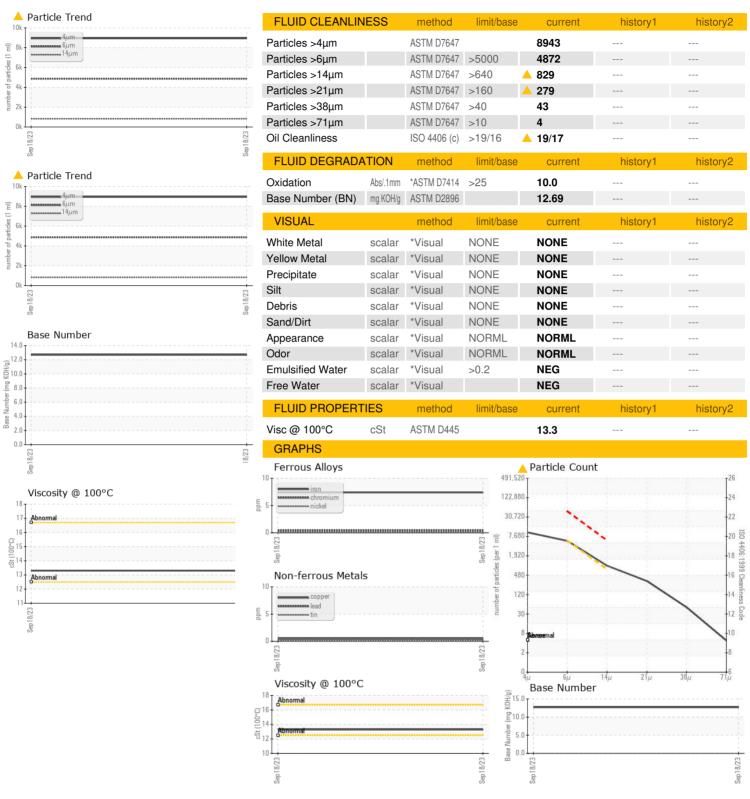



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

Test Package

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KL0012833 : 05964798

Received : 10671349

Diagnosed Diagnostician : MOB 2 ( Additional Tests: PrtCount )

: 29 Sep 2023 : 03 Oct 2023 : Angela Borella

To discuss this sample report, contact Customer Service at 1-800-237-1369.

MX 83140 Contact: EDUARDO GARCIA egarcia.comsa@gmail.com T: (526)622-1581 x:81

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: EDUARDO GARCIA

CONOR

F: x:

JUAREZ 348

HERMOSILLO.